


# LOW VOLTAGE CABLES

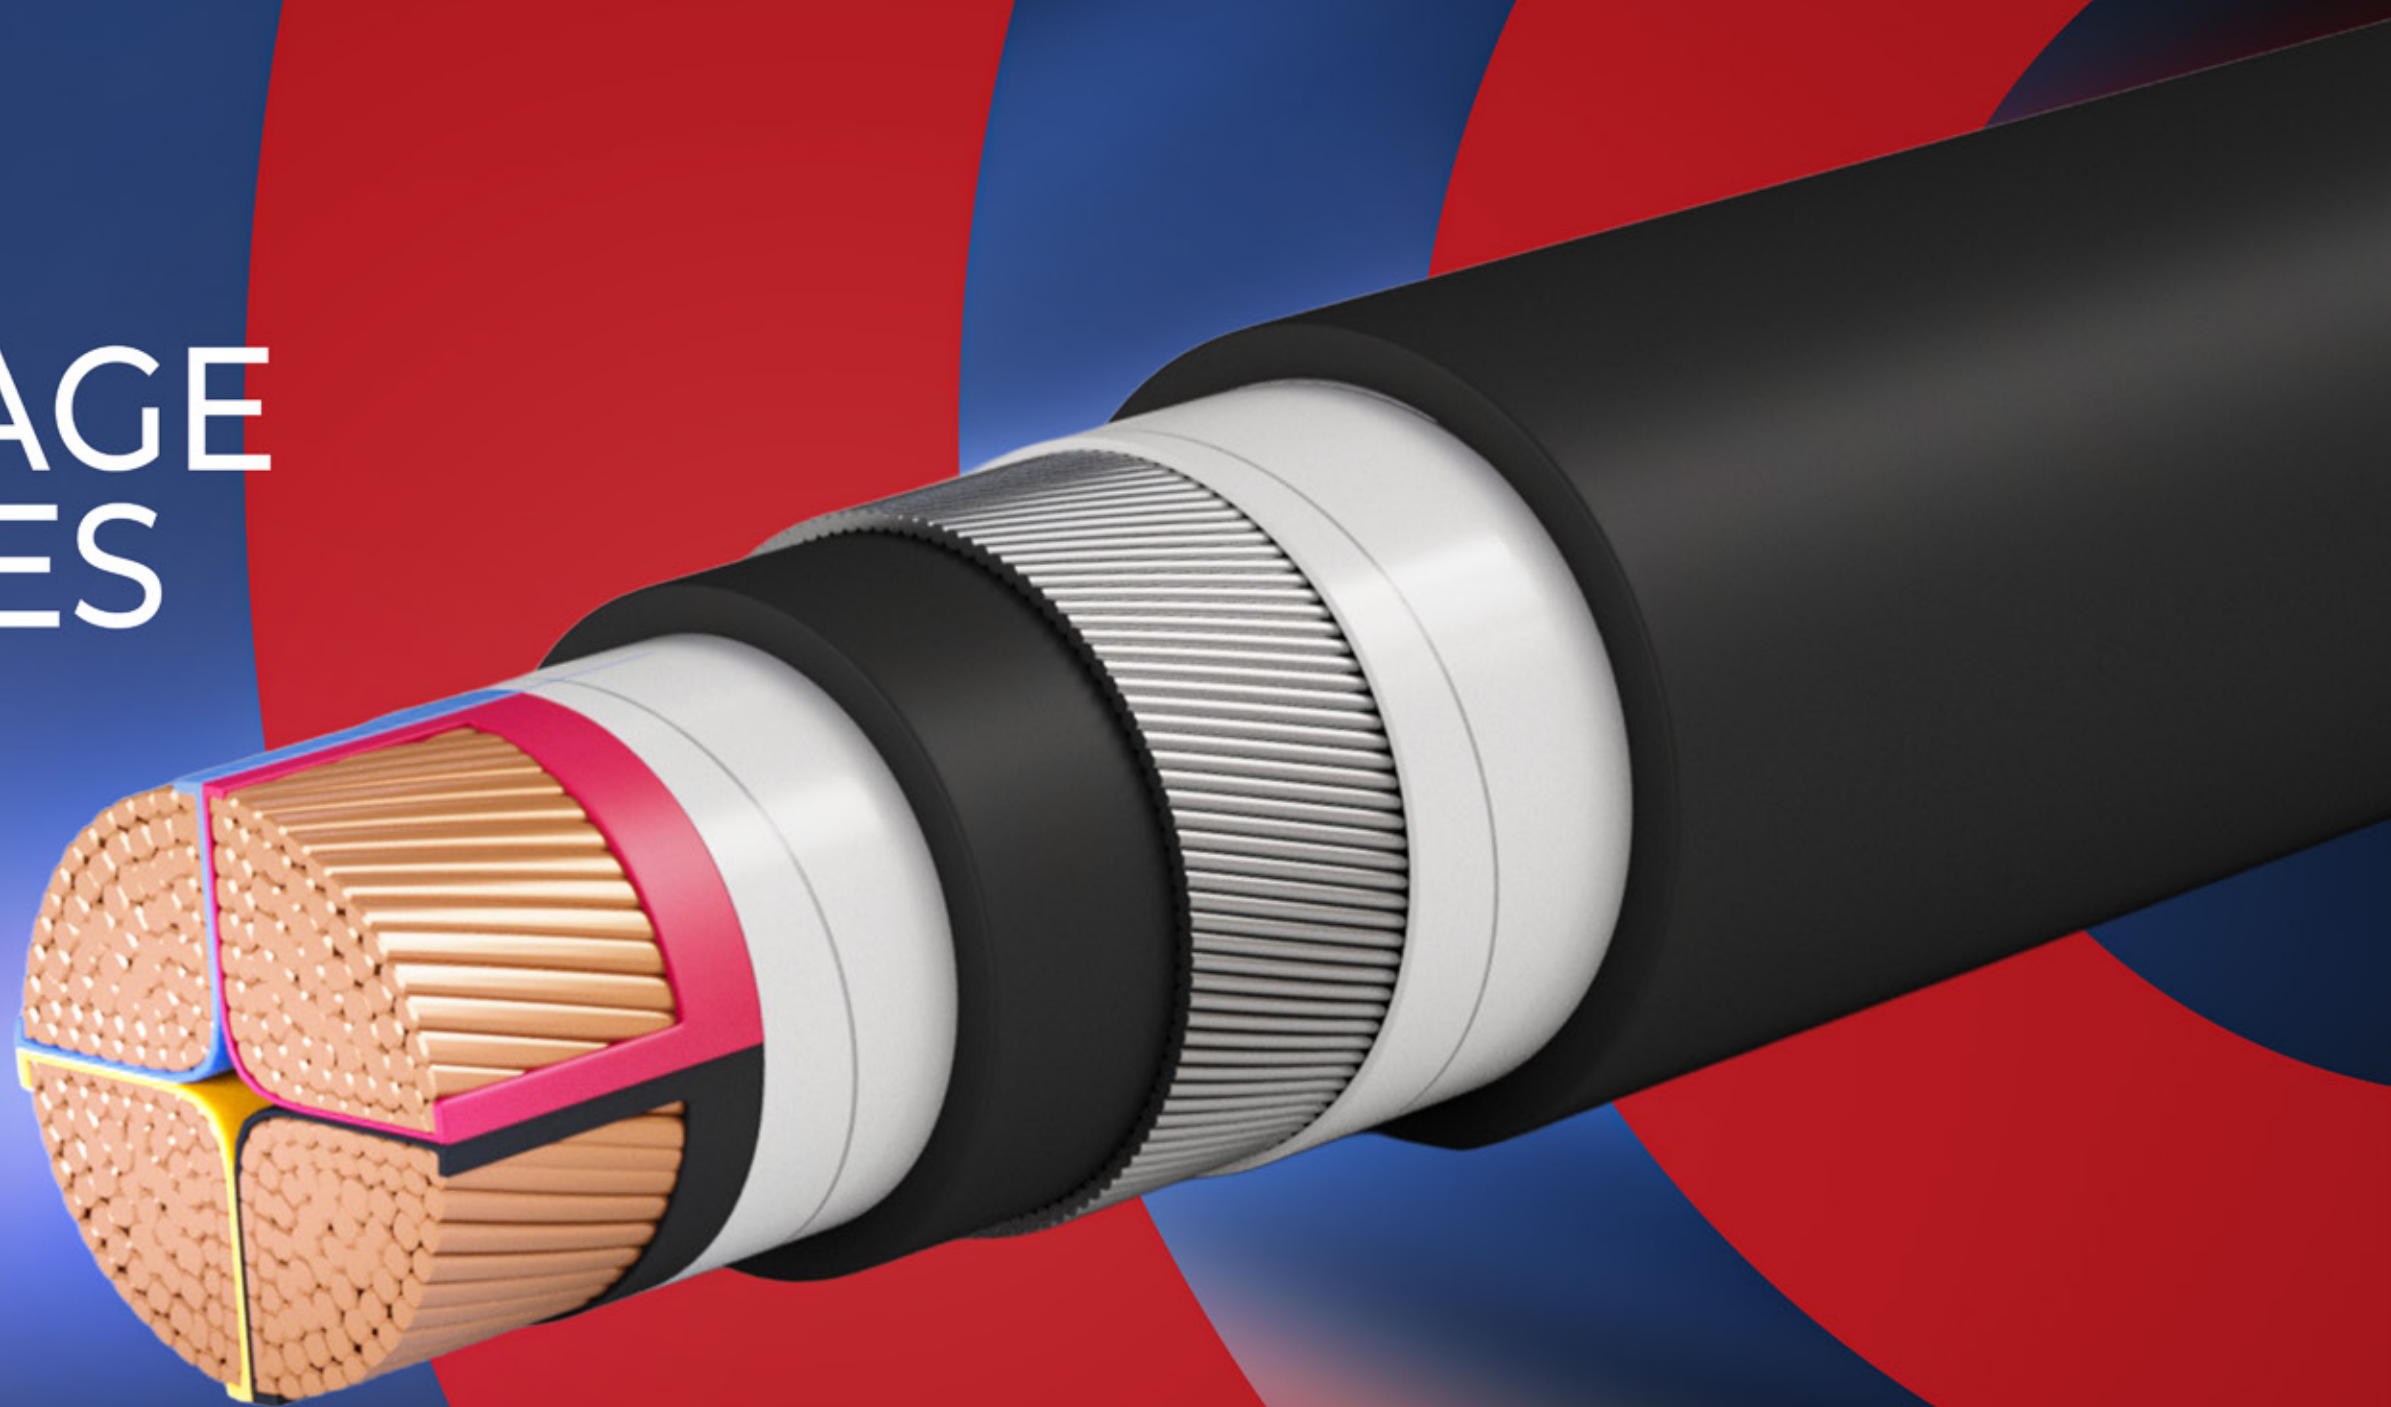

Single Core Cables, with Stranded Circular Aluminium Conductors, PVC Insulated , Aluminum Wire Armoured and PVC Sheathed

Voltage Grade

0.6 /1 (1.2) KV

Description

Stranded Aluminum conductor, Insulated with PVC compound rated 70° C , Aluminum Wire armoured and sheathed with PVC Compound layer.

Application

For outdoor and indoor installations in damp and wet locations where mechanical damages are expected to occur. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Relevant Standard       | IEC 60502                                                                 |
| Conductor               | Aluminum conductor H12 class 2                                            |
| Insulation              | Extruded PVC Compound type PVC / A Rated 70° C                            |
| Inner Sheath            | Extruded PVC Compound                                                     |
| Armoring                | Aluminum wire armoured applied over the inner sheath.                     |
| Outer Sheath            | Extruded PVC Compound                                                     |
| Insulation Color        | Natural (default color), or any other color according to customer request |
| Outer Sheath Color      | Black (default color), or any other color according to customer request   |
| Maximum Operating Temp. | 70° C                                                                     |
| Minimum bending Radius  | 10 x outer diameter                                                       |
| Packing Condition       | Our standard length on Wooden Drum / or according to customer request     |

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

| Product Code | Nominal Cross Sectional Area mm2 | Max. Conductor Resistance |                  | Current Rating                                                                           |                                                                                          |                                                                                          |                                                                                          |                                                                                          | Approx. Overall | Approx.         |
|--------------|----------------------------------|---------------------------|------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------|-----------------|
|              |                                  |                           |                  | Laid in ground                                                                           |                                                                                          | Laid in Free Air                                                                         |                                                                                          |                                                                                          |                 |                 |
|              |                                  | DC at 20 °C Ω/km          | AC at 70 °C Ω/km | Flat                                                                                     | Trefoil                                                                                  | Flat separated                                                                           | Flat touched                                                                             | Trefoil                                                                                  |                 |                 |
|              |                                  |                           |                  | <br>A | <br>A | <br>A | <br>A | <br>A | Diameter<br>mm  | Weight<br>kg/km |

| A - Aluminum Conductors |     |        |        |     |     |     |     |     |      |      |
|-------------------------|-----|--------|--------|-----|-----|-----|-----|-----|------|------|
| PL-AT12-P3-01-RP        | 25  | 1.2000 | 1.4419 | 104 | 106 | 122 | 101 | 98  | 16.8 | 388  |
| PL-AT13-P3-01-RP        | 35  | 0.8680 | 1.0430 | 124 | 126 | 148 | 123 | 119 | 18.1 | 454  |
| PL-AT14-P3-01-RP        | 50  | 0.6410 | 0.7703 | 146 | 149 | 178 | 148 | 144 | 19.5 | 519  |
| PL-AT15-P3-01-RP        | 70  | 0.4430 | 0.5326 | 179 | 182 | 222 | 185 | 180 | 21.0 | 617  |
| PL-AT16-P3-01-RP        | 95  | 0.3200 | 0.3849 | 213 | 217 | 268 | 224 | 219 | 23.0 | 750  |
| PL-AT17-P3-01-RP        | 120 | 0.2530 | 0.3046 | 241 | 247 | 308 | 259 | 253 | 24.4 | 861  |
| PL-AT18-P3-01-RP        | 150 | 0.2060 | 0.2483 | 269 | 275 | 347 | 294 | 287 | 26.5 | 1016 |
| PL-AT19-P3-01-RP        | 185 | 0.1640 | 0.1980 | 303 | 310 | 395 | 337 | 331 | 29.0 | 1206 |
| PL-AT20-P3-01-RP        | 240 | 0.1250 | 0.1515 | 347 | 358 | 459 | 397 | 390 | 31.6 | 1459 |
| PL-AT21-P3-01-RP        | 300 | 0.1000 | 0.1219 | 386 | 400 | 517 | 454 | 448 | 35.0 | 1797 |
| PL-AT22-P3-01-RP        | 400 | 0.0778 | 0.0957 | 432 | 452 | 585 | 522 | 518 | 38.3 | 2188 |
| PL-AT23-P3-01-RP        | 500 | 0.0605 | 0.0757 | 483 | 509 | 662 | 598 | 598 | 42.2 | 2672 |
| PL-AT24-P3-01-RP        | 630 | 0.0469 | 0.0603 | 534 | 568 | 740 | 678 | 683 | 46.3 | 3232 |
| PL-AT25-P3-01-RP        | 800 | 0.0367 | 0.0490 | 567 | 613 | 807 | 748 | 763 | 52.2 | 4123 |

The above data is approximate and subject to manufacturing tolerances