


LOW VOLTAGE CABLES

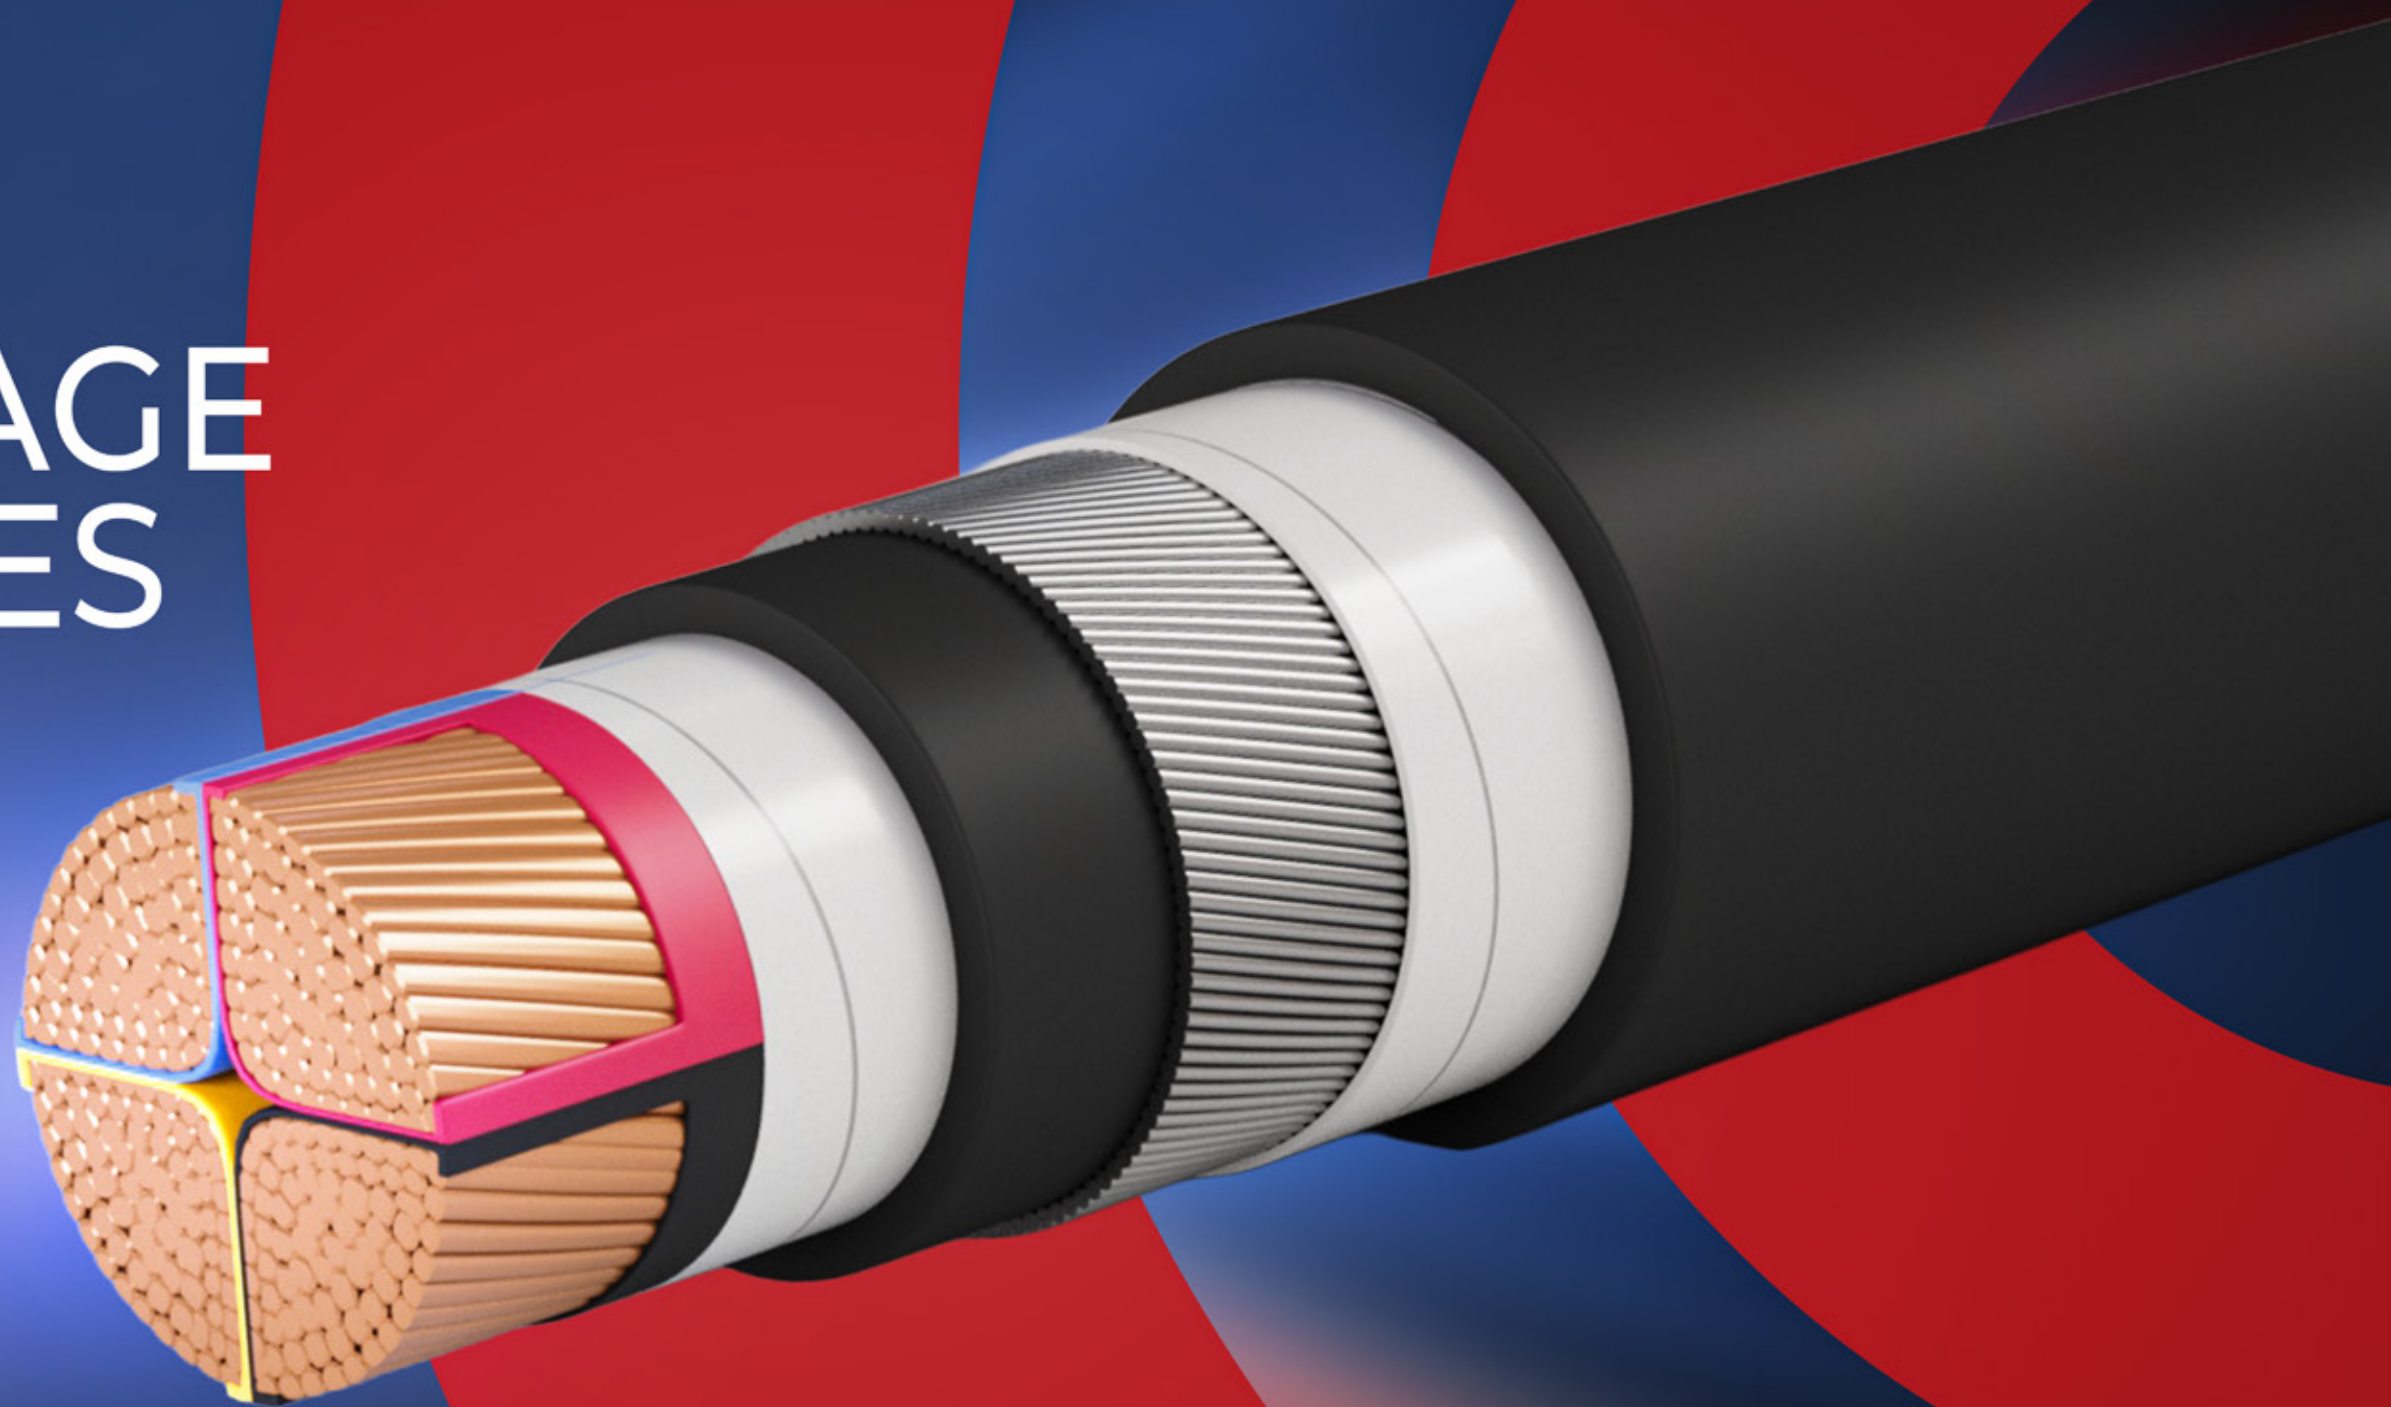

Single Core Cables, With Stranded Circular Aluminum Conductors, PVC Insulated And PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Stranded Aluminium conductor, Insulated with PVC compound rated 70° C and sheathed with PVC Compound layer.

Application


For outdoor and indoor installations in damp and wet locations. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminum conductor H12 class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C Extruded
Outer Sheath	PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/ and PVC sheathed are available according to customer request

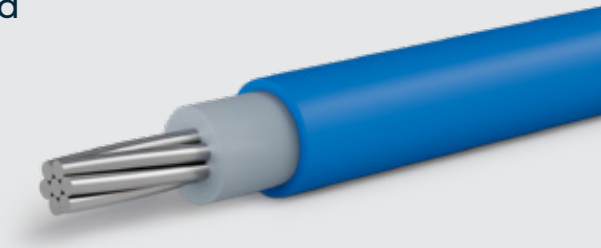

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating						Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in ground			Laid in Free Air			Diameter mm	Weight kg/km
						Laid in duct					
A- Aluminum Conductors											
PL-AT11-P3-01-UP	16	1.9100	2.2900	80	81	58	83	65	63	9.4	125.0
PL-AT12-P3-01-UP	25	1.2000	1.4400	103	104	76	111	87	85	11.1	180.0
PL-AT13-P3-01-UP	35	0.8680	1.0400	124	125	91	136	107	104	12.2	220.0
PL-AT14-P3-01-UP	50	0.6410	0.7700	146	148	110	166	132	128	13.6	265.0
PL-AT15-P3-01-UP	70	0.4430	0.5330	179	181	136	210	167	162	15.1	340.0
PL-AT16-P3-01-UP	95	0.3200	0.3850	214	217	167	258	207	201	17.3	455.0
PL-AT17-P3-01-UP	120	0.2530	0.3050	244	247	190	300	241	234	18.5	535.0
PL-AT18-P3-01-UP	150	0.2060	0.2480	273	277	218	343	278	269	20.4	645.0
PL-AT19-P3-01-UP	185	0.1640	0.1980	310	315	250	397	324	314	23.1	810.0
PL-AT20-P3-01-UP	240	0.1250	0.1510	359	365	295	473	388	376	25.7	1025.0
PL-AT31-P3-01-UP	300	0.1000	0.1220	406	413	339	548	451	438	28.5	1260.0
PL-AT22-P3-01-UP	400	0.0778	0.0954	464	472	394	644	531	515	31.8	1590.0
PL-AT23-P3-01-UP	500	0.0605	0.0751	530	539	459	757	625	605	35.7	2005.0
PL-AT24-P3-01-UP	630	0.0469	0.0595	603	614	528	889	730	707	40.2	2505.0
PL-AT25-P3-01-UP	800	0.0367	0.0503	679	692	605	1045	850	822	44.6	3080.0

The above data is approximate and subject to manufacturing tolerances