


LOW VOLTAGE CABLES

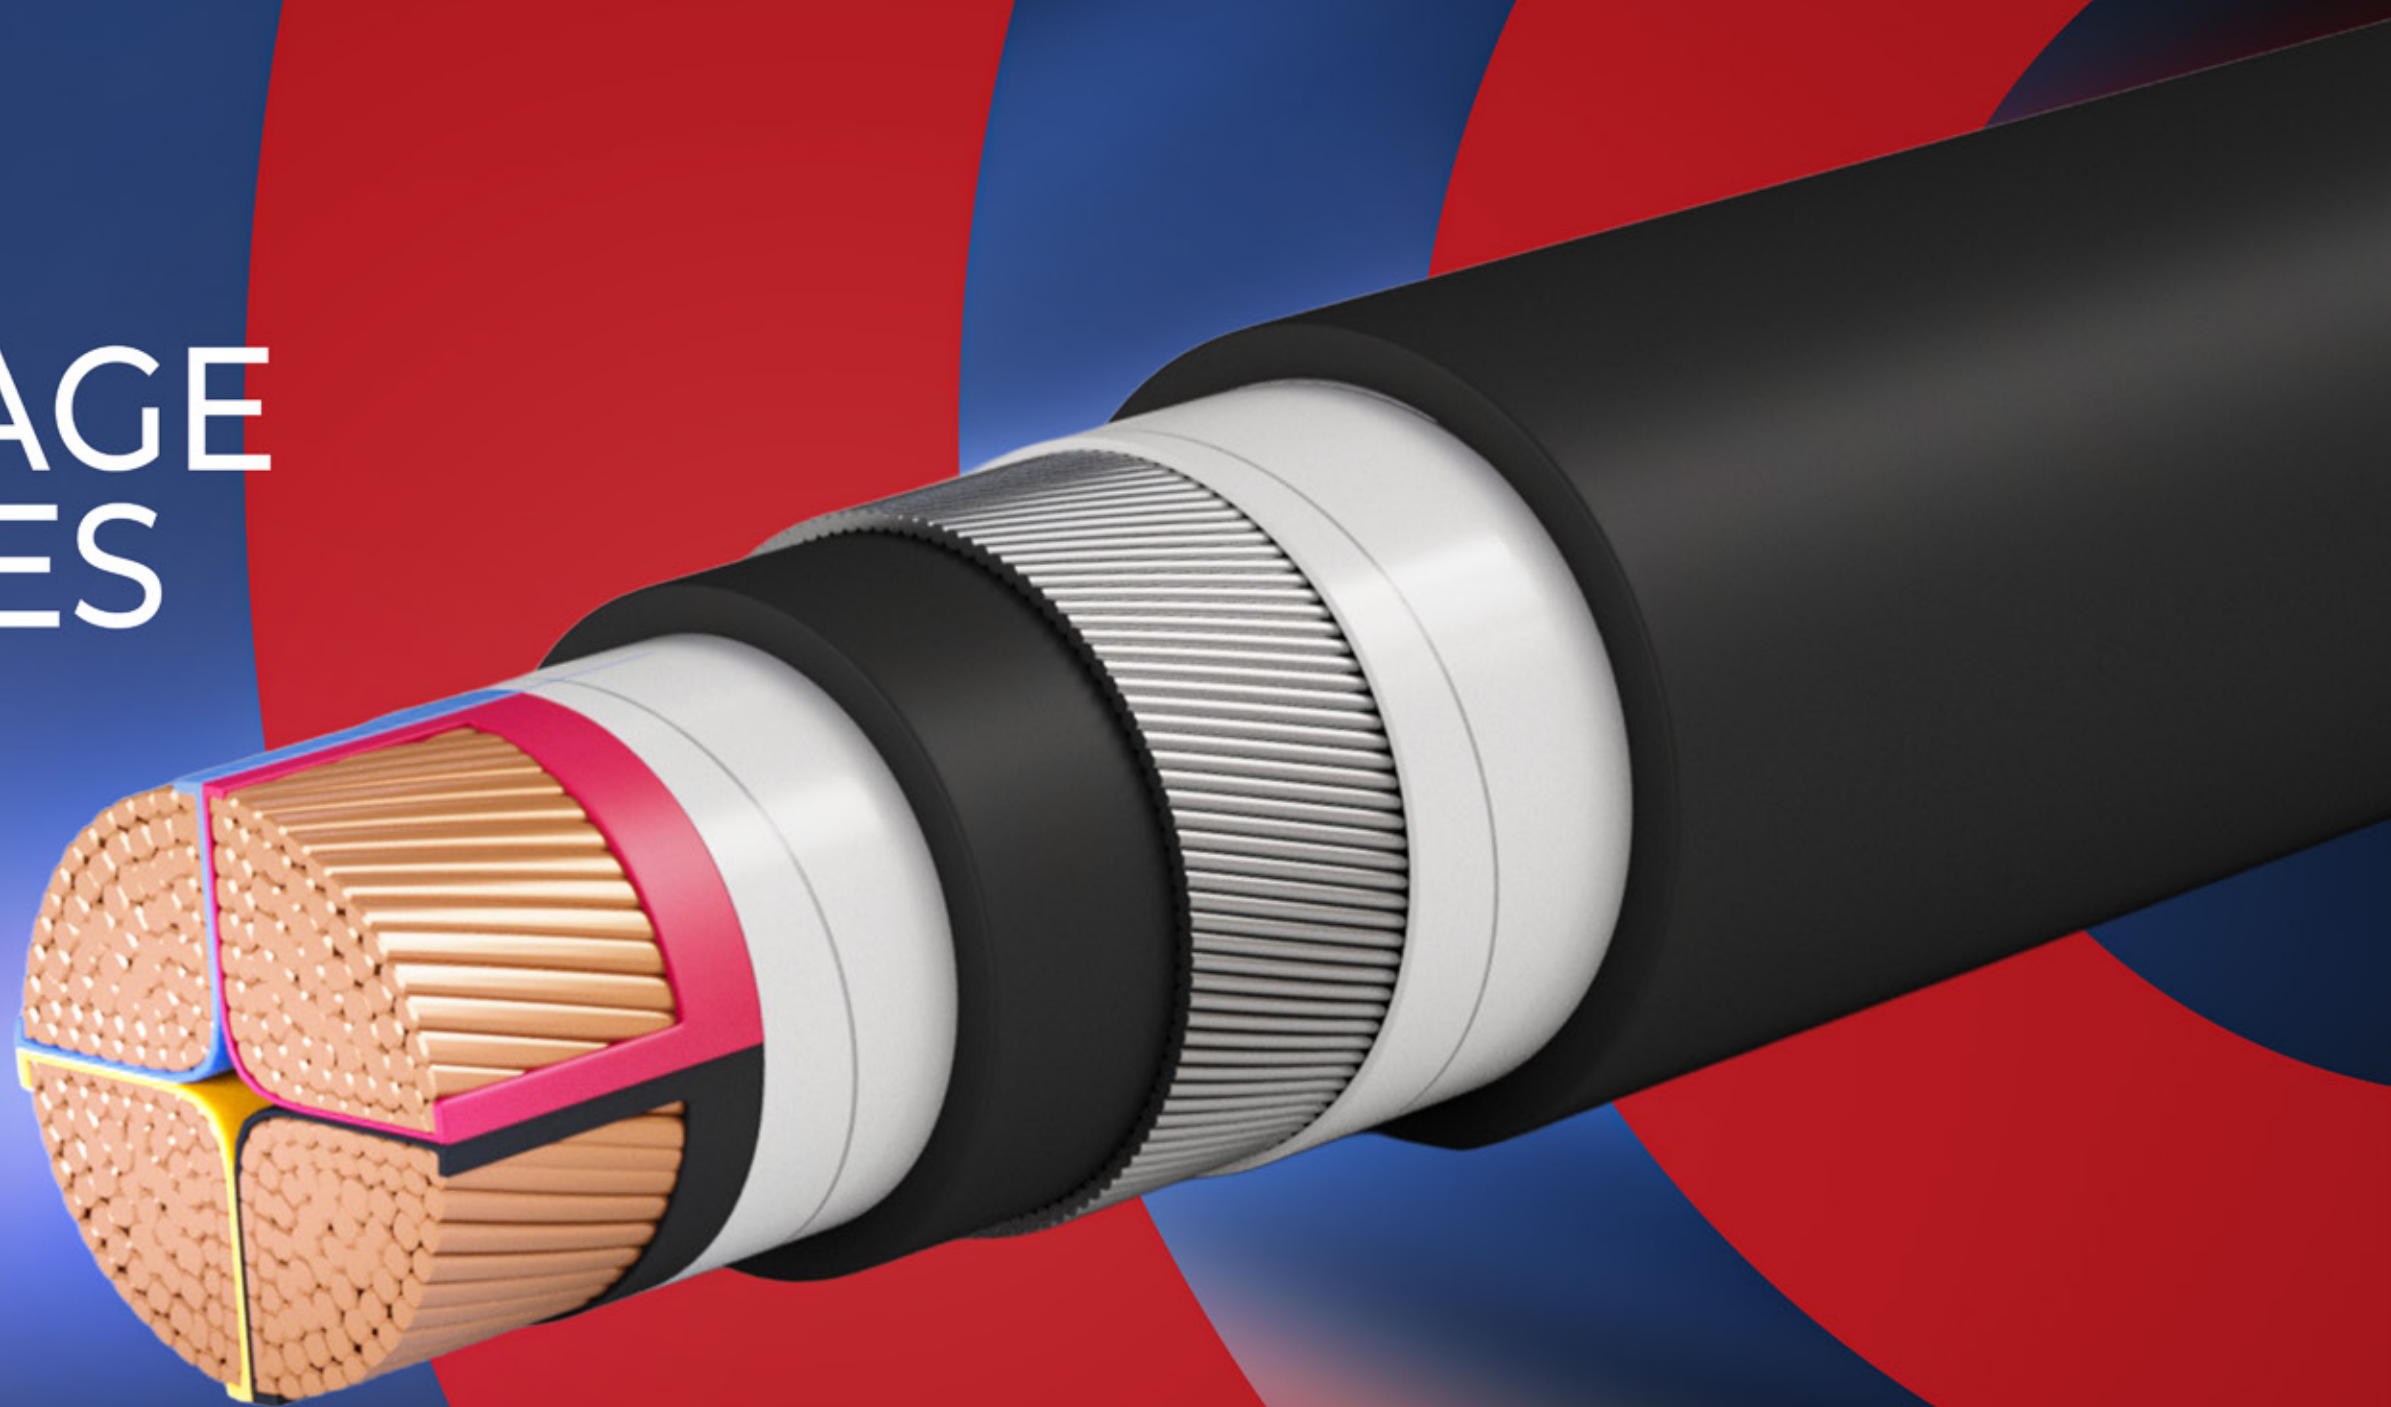

Single Core Cables, with Stranded Aluminium
Conductors, XLPE Insulated , Aluminum Tape Armoured
and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Stranded Aluminium conductor, Insulated with XLPE compound rated 90° C, Aluminum tape armoured and sheathed with PVC Compound layer.

Application


For outdoor and indoor installations in damp and wet locations where mechanical damages are expected to occur. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminium conductor H12 class 2
Insulation	Extruded XLPE Compound Rated 90° C
Inner Sheath	Extruded PVC Compound
Armoring	Aluminum tape armoured applied helically over the inner sheath.
Outer Sheath	Extruded PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

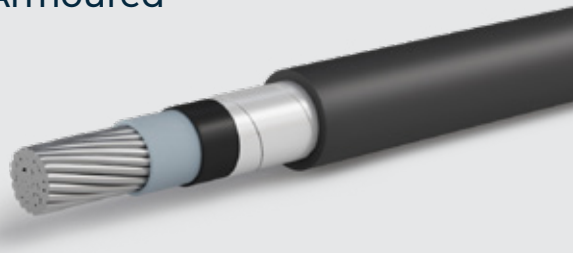

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating					Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in ground		Laid in Free Air			Diameter mm	Weight kg/km
				Flat	Trefoil	Flat separated	Flat touched	Trefoil		
										
A - Aluminium Conductors										
PL-AT15-X3-01-DP	70	0.4430	0.5683	207	210	274	223	217	18.7	471
PL-AT16-X3-01-DP	95	0.3200	0.4108	247	251	333	272	265	20.3	575
PL-AT17-X3-01-DP	120	0.2530	0.3250	281	285	386	316	308	21.7	668
PL-AT18-X3-01-DP	150	0.2060	0.2649	314	319	439	362	352	23.8	798
PL-AT19-X3-01-DP	185	0.1640	0.2113	355	362	506	419	408	26.3	960
PL-AT20-X3-01-DP	240	0.1250	0.1617	411	420	599	498	485	28.7	1172
PL-AT21-X3-01-DP	300	0.1000	0.1301	464	474	689	577	561	31.3	1400
PL-AT22-X3-01-DP	400	0.0778	0.1022	528	541	798	675	658	34.6	1738
PL-AT23-X3-01-DP	500	0.0605	0.0808	600	616	925	788	770	38.5	2155
PL-AT24-X3-01-DP	630	0.0469	0.0643	676	698	1064	913	895	43.0	2692
PL-AT25-X3-01-DP	800	0.0367	0.0523	755	784	1214	1052	1035	48.3	3397

The above data is approximate and subject to manufacturing tolerances