


LOW VOLTAGE CABLES

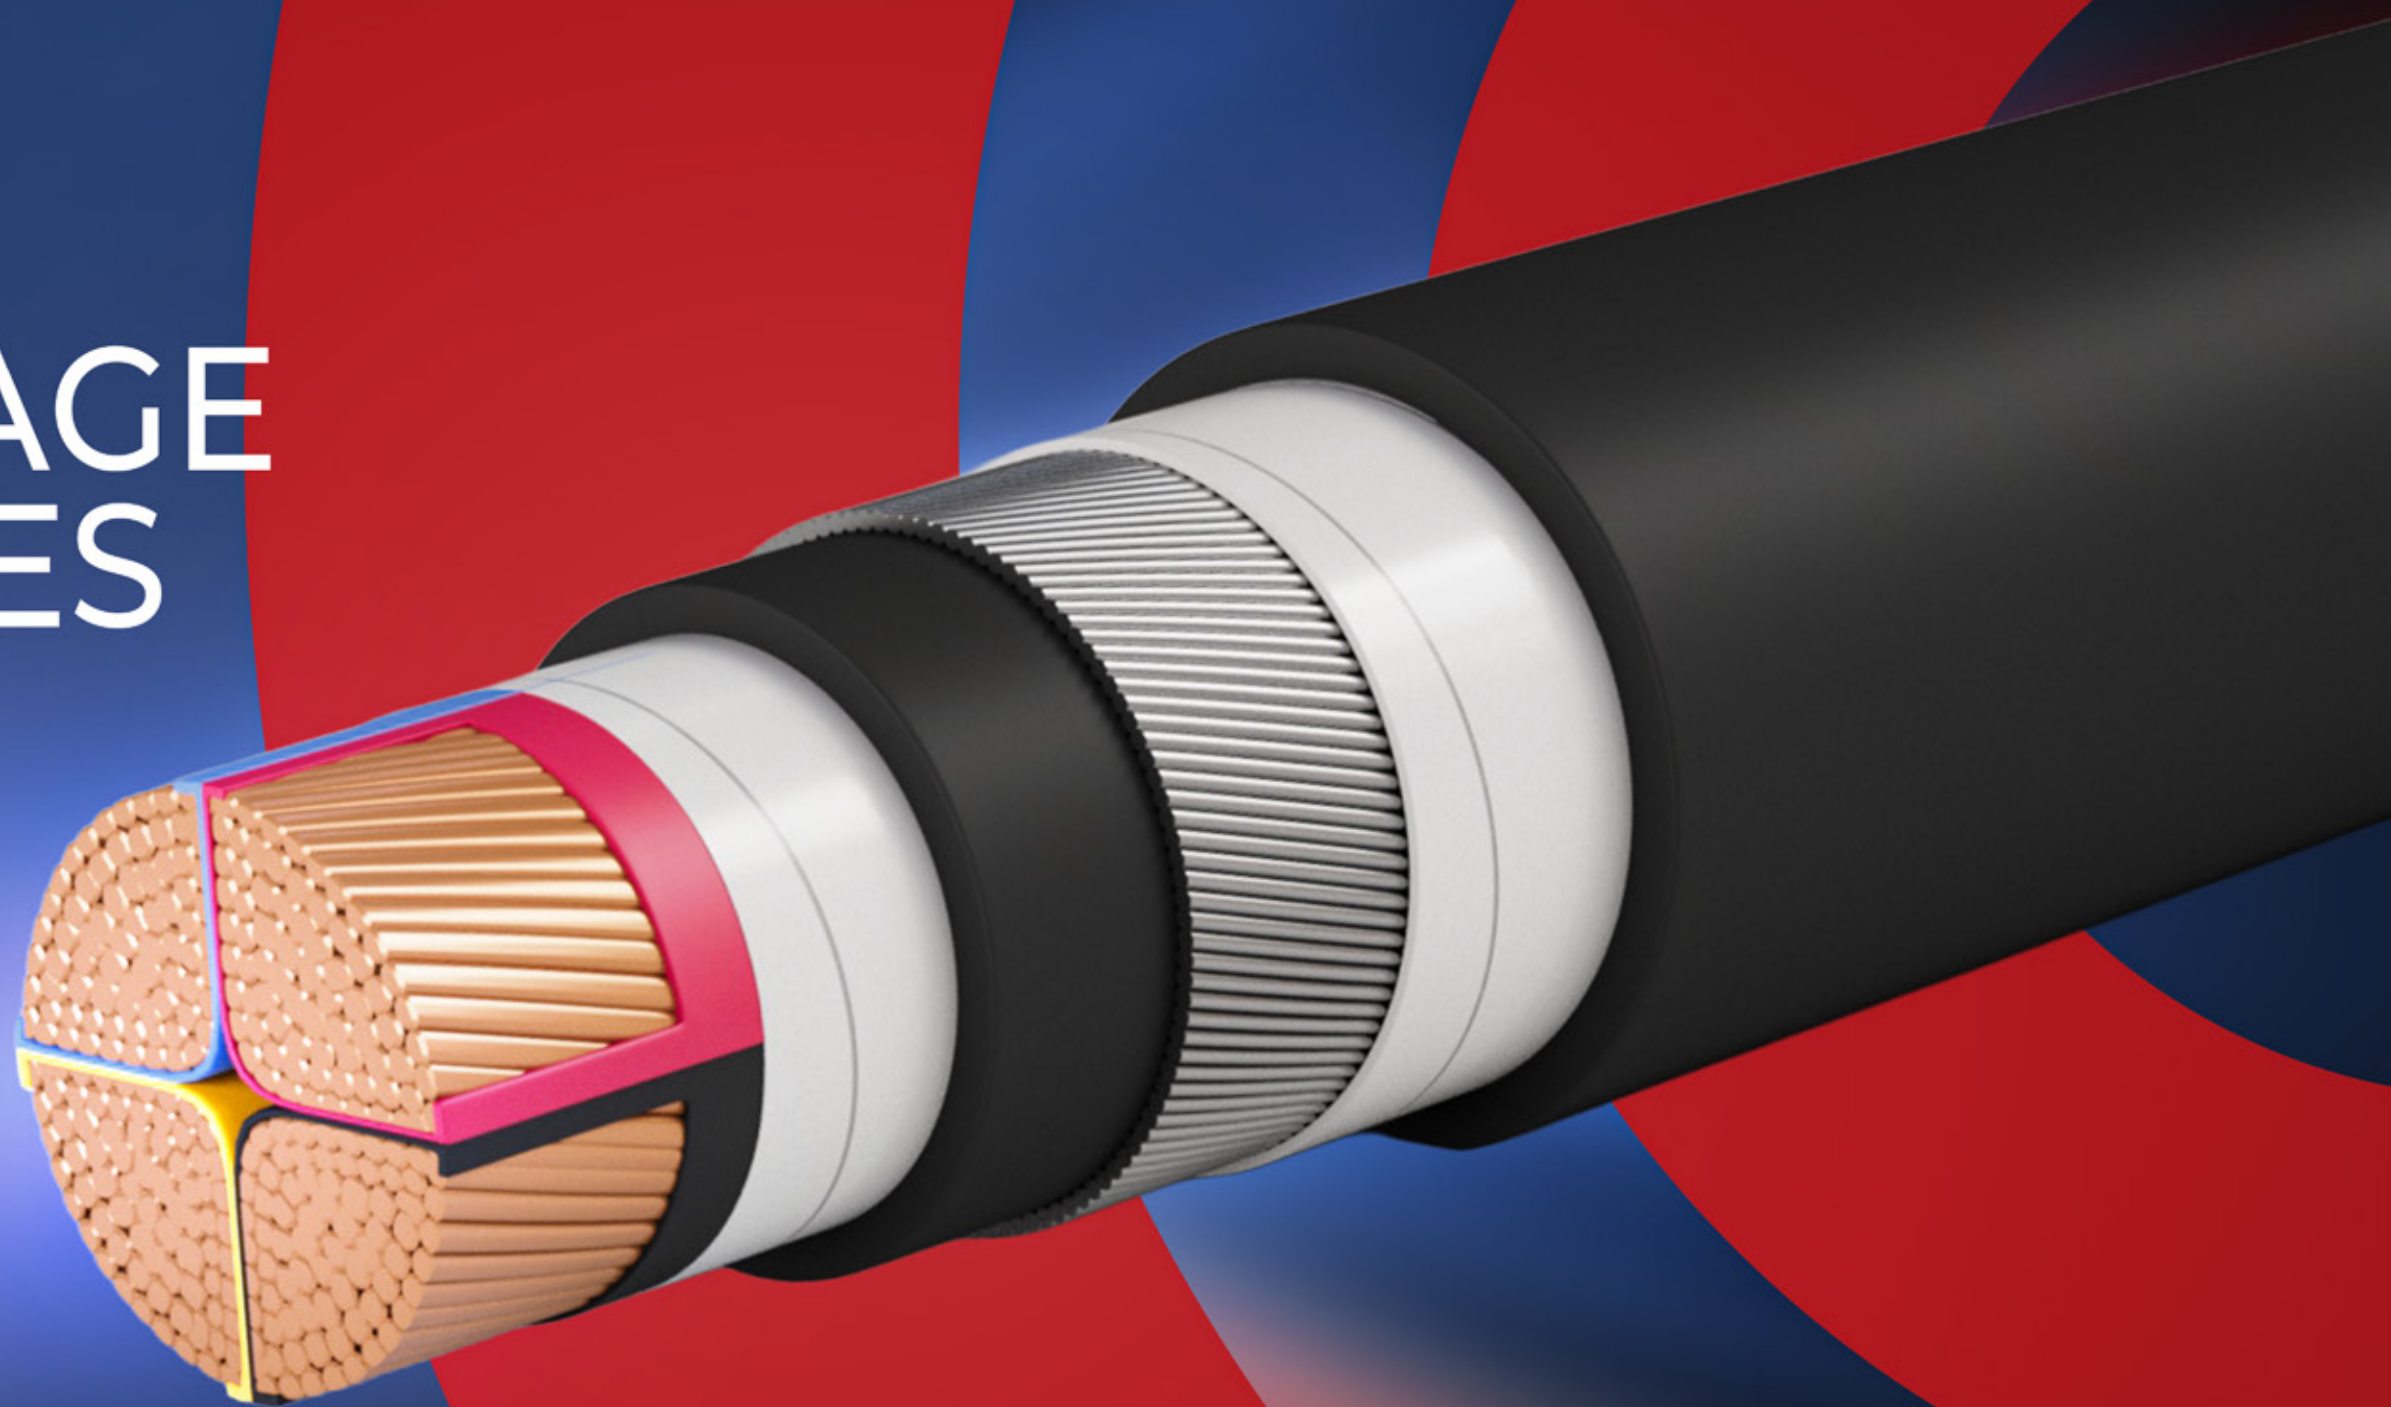

Single Core Cables, with Stranded Circular Aluminium Conductors, XLPE Insulated , Aluminum Wire Armoured and PVC Sheathed

Voltage Grade

0.6 /1 (1.2) KV

Description

Stranded Aluminum conductor, Insulated with XLPE compound rated 90° C, Aluminum Wire armoured and sheathed with PVC Compound layer.

Application

For outdoor and indoor installations in damp and wet locations where mechanical damages are expected to occur. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminum conductor H12 class 2
Insulation	Extruded XLPE Compound Rated 90° C
Inner Sheath	Extruded PVC Compound
Armoring	Aluminum wire armoured applied over the inner sheath.
Outer Sheath	Extruded PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating					Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in ground		Laid in Free Air			Diameter mm	Weight kg/km
				Flat A	Trefoil A	Flat separated A	Flat touched A	Trefoil A		

A - Aluminum Conductors										
PL-AT12-X3-01-RP	25	1.2000	1.5386	121	123	154	126	123	16.2	348
PL-AT13-X3-01-RP	35	0.8680	1.1130	144	147	187	153	149	17.3	401
PL-AT14-X3-01-RP	50	0.6410	0.8220	171	174	225	185	180	18.7	466
PL-AT15-X3-01-RP	70	0.4430	0.5683	209	212	280	231	225	20.4	563
PL-AT16-X3-01-RP	95	0.3200	0.4107	247	252	338	281	274	22.0	674
PL-AT17-X3-01-RP	120	0.2530	0.3249	281	286	389	325	317	23.6	784
PL-AT18-X3-01-RP	150	0.2060	0.2648	313	320	439	369	360	25.5	910
PL-AT19-X3-01-RP	185	0.1640	0.2112	352	362	501	425	415	28.2	1101
PL-AT20-X3-01-RP	240	0.1250	0.1616	405	417	585	500	491	30.6	1326
PL-AT21-X3-01-RP	300	0.1000	0.1299	453	468	663	573	564	33.2	1566
PL-AT22-X3-01-RP	400	0.0778	0.1020	507	528	749	661	655	37.1	1983
PL-AT23-X3-01-RP	500	0.0605	0.0805	567	595	847	759	757	41.0	2432
PL-AT24-X3-01-RP	630	0.0469	0.0640	628	666	951	865	868	45.3	2978
PL-AT25-X3-01-RP	800	0.0367	0.0518	667	719	1031	955	972	51.8	3890

The above data is approximate and subject to manufacturing tolerances