



# LOW VOLTAGE CABLES

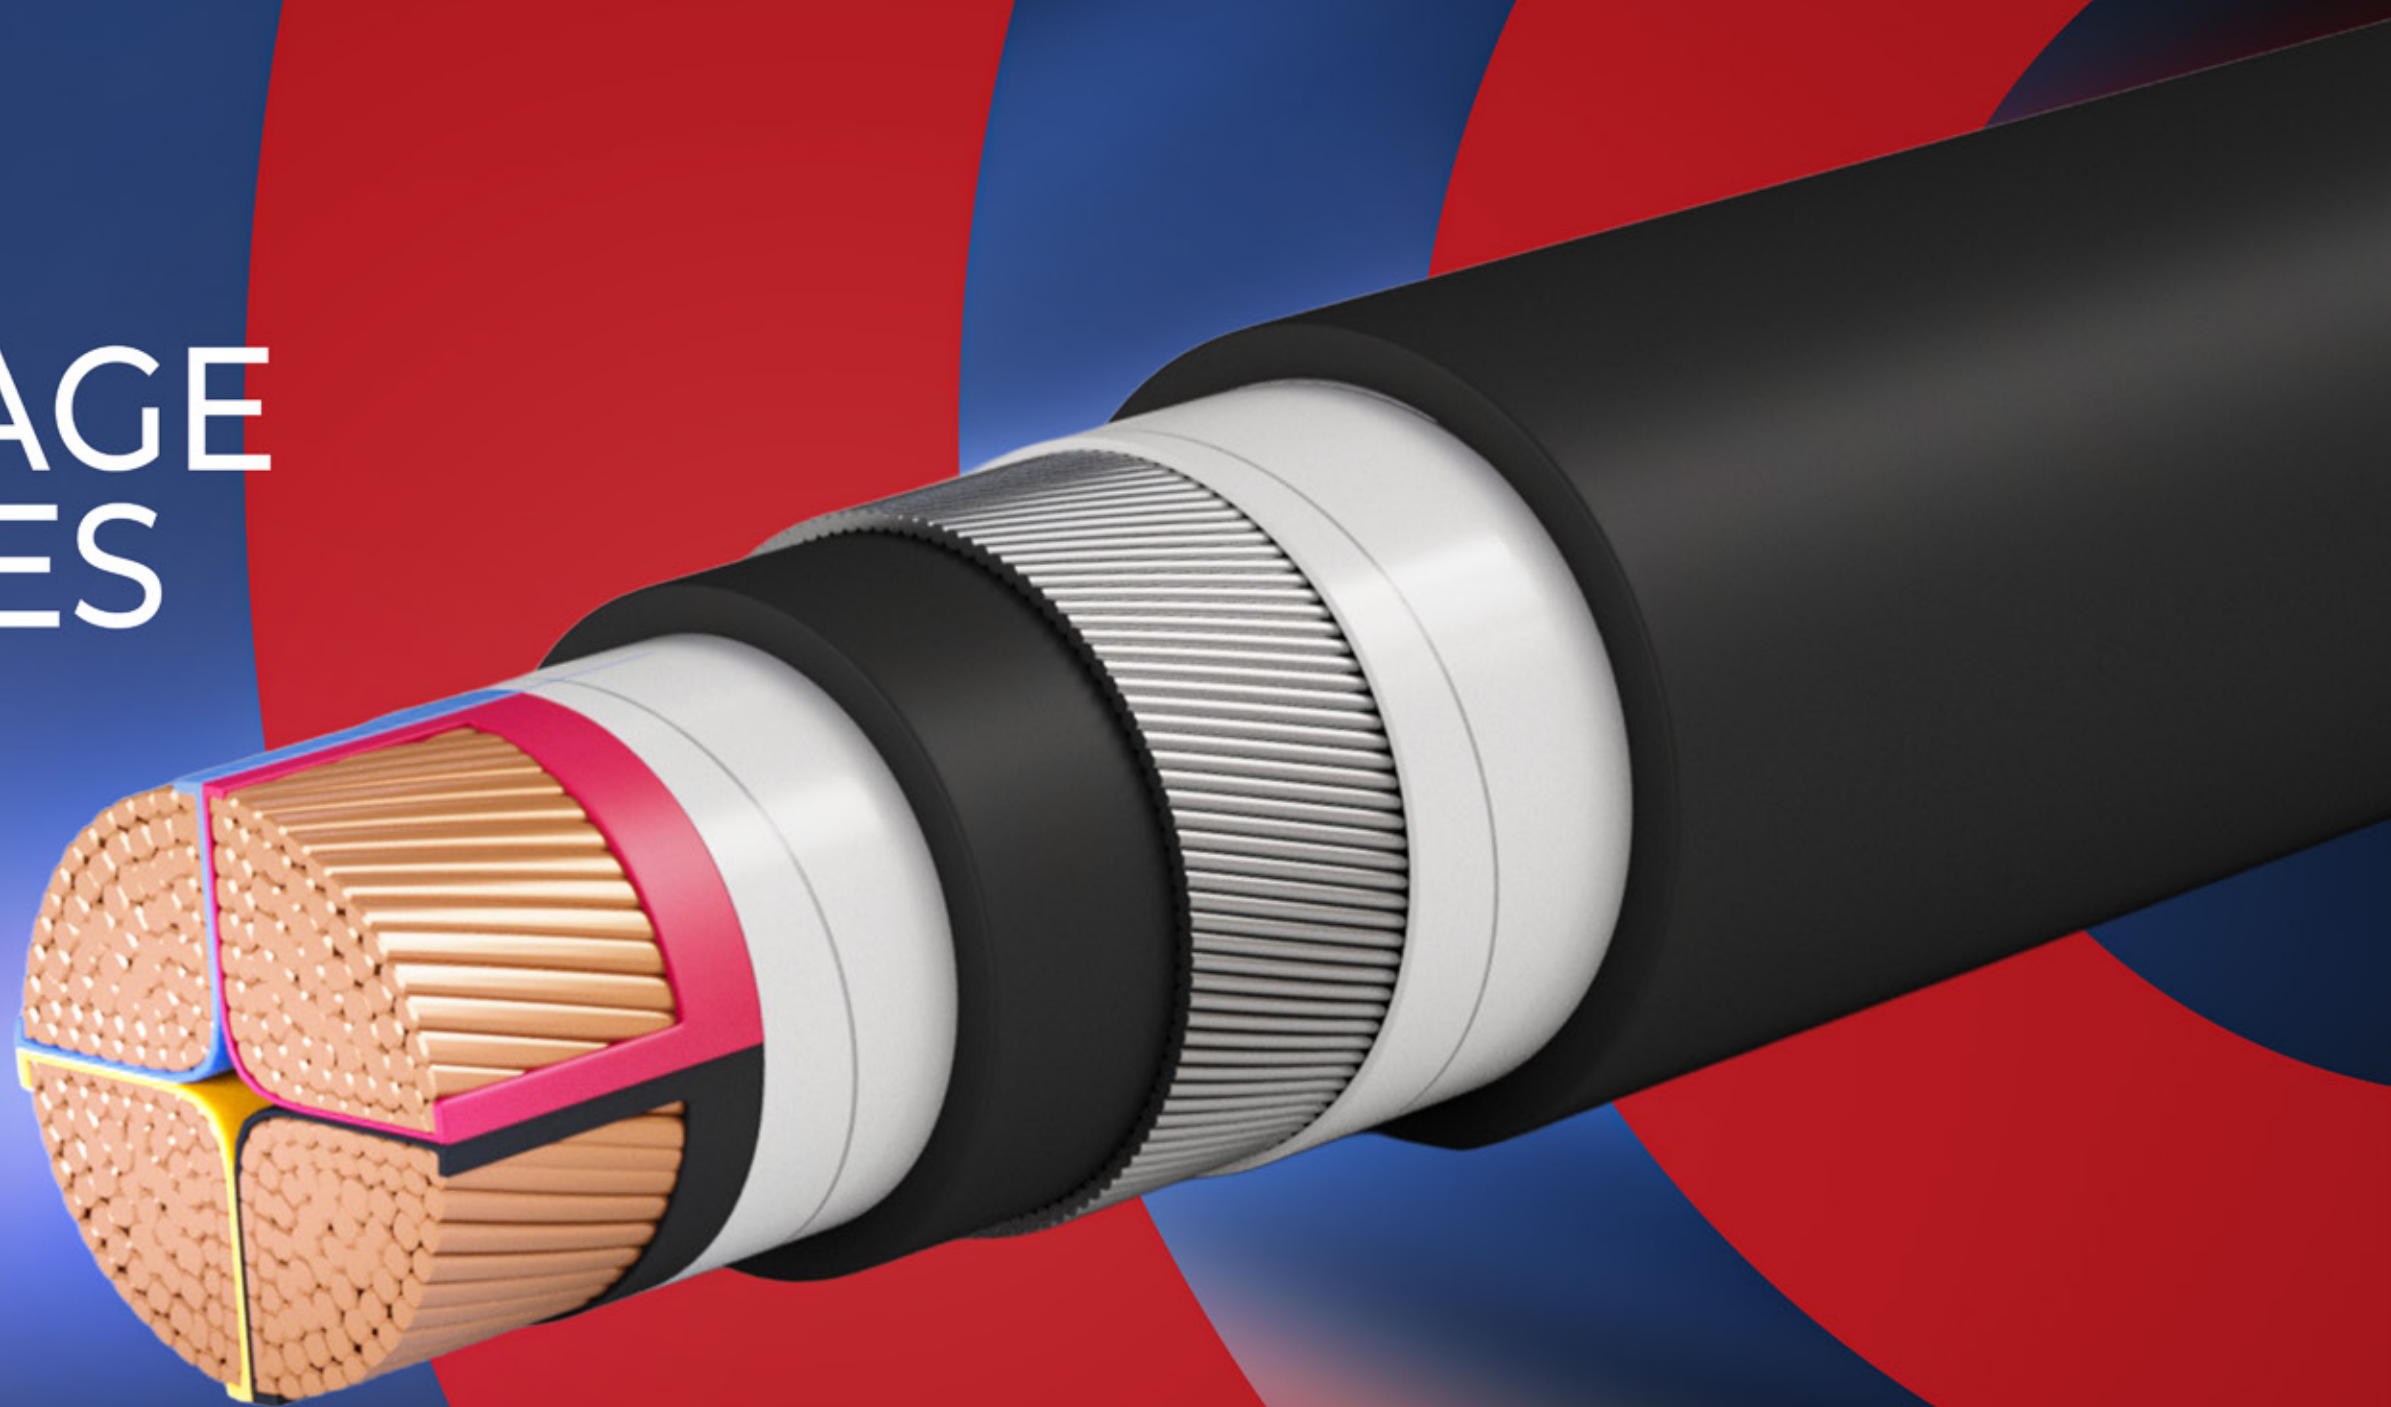

Single Core Cables, With Stranded Circular Aluminum  
Conductors, XLPE Insulated And PVC Sheathed

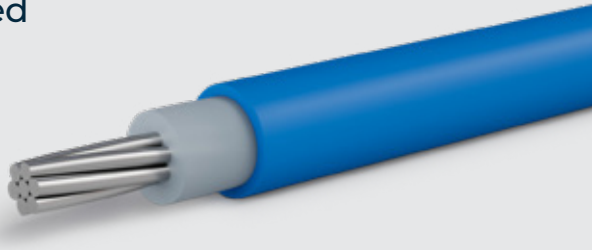

Voltage Grade

0.6 / 1 (1.2) KV

Description

Stranded Aluminium conductor, Insulated with XLPE compound rated 90° C and sheathed with PVC Compound layer.

Application

For outdoor and indoor installations in damp and wet locations. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Relevant Standard       | IEC 60502                                                                 |
| Conductor               | Aluminum conductor H12 class 2                                            |
| Insulation              | Extruded XLPE Compound Rated 90° C                                        |
| Outer Sheath            | Extruded PVC Compound                                                     |
| Insulation Color        | Natural (default color), or any other color according to customer request |
| Outer Sheath Color      | Black (default color), or any other color according to customer request   |
| Maximum Operating Temp. | 90° C                                                                     |
| Minimum bending Radius  | 10 x outer diameter                                                       |
| Packing Condition       | Our standard length on Wooden Drum / or according to customer request     |

Note:-

Heat resistant or/and flame retardant PVC insulated or/ and PVC sheathed are available according to customer request

| Product Code           | Nominal Cross Sectional Area mm2 | Max. Conductor Resistance |                  | Current Rating                                                                      |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     | Approx. Overall | Approx.      |
|------------------------|----------------------------------|---------------------------|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------------|
|                        |                                  | DC at 20 °C Ω/km          | AC at 90 °C Ω/km | Laid in ground                                                                      |                                                                                     |                                                                                     | Laid in Free Air                                                                    |                                                                                     |                                                                                     | Diameter mm     | Weight kg/km |
|                        |                                  |                           |                  |  |  |  |  |  |  |                 |              |
|                        |                                  |                           |                  |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                 |              |
| B- Aluminum Conductors |                                  |                           |                  |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                 |              |
| PL-AT11-X3-01-UP       | 16                               | 1.9100                    | 2.4500           | 93                                                                                  | 94                                                                                  | 67                                                                                  | 104                                                                                 | 80                                                                                  | 77                                                                                  | 8.8             | 105.0        |
| PL-AT12-X3-01-UP       | 25                               | 1.2000                    | 1.5400           | 120                                                                                 | 121                                                                                 | 88                                                                                  | 139                                                                                 | 107                                                                                 | 104                                                                                 | 10.5            | 150.0        |
| PL-AT13-X3-01-UP       | 35                               | 0.8680                    | 1.1130           | 143                                                                                 | 145                                                                                 | 107                                                                                 | 171                                                                                 | 133                                                                                 | 129                                                                                 | 11.6            | 185.0        |
| PL-AT14-X3-01-UP       | 50                               | 0.6410                    | 0.8220           | 170                                                                                 | 172                                                                                 | 129                                                                                 | 208                                                                                 | 163                                                                                 | 158                                                                                 | 12.8            | 220.0        |
| PL-AT15-X3-01-UP       | 70                               | 0.4430                    | 0.5690           | 208                                                                                 | 211                                                                                 | 159                                                                                 | 264                                                                                 | 208                                                                                 | 202                                                                                 | 14.5            | 295.0        |
| PL-AT16-X3-01-UP       | 95                               | 0.3200                    | 0.4110           | 248                                                                                 | 252                                                                                 | 193                                                                                 | 324                                                                                 | 256                                                                                 | 249                                                                                 | 16.3            | 390.0        |
| PL-AT17-X3-01-UP       | 120                              | 0.2530                    | 0.3250           | 283                                                                                 | 287                                                                                 | 223                                                                                 | 377                                                                                 | 300                                                                                 | 291                                                                                 | 17.7            | 470.0        |
| PL-AT18-X3-01-UP       | 150                              | 0.2060                    | 0.2650           | 317                                                                                 | 322                                                                                 | 252                                                                                 | 432                                                                                 | 346                                                                                 | 336                                                                                 | 19.6            | 565.0        |
| PL-AT19-X3-01-UP       | 185                              | 0.1640                    | 0.2120           | 359                                                                                 | 365                                                                                 | 292                                                                                 | 502                                                                                 | 404                                                                                 | 392                                                                                 | 22.1            | 705.0        |
| PL-AT20-X3-01-UP       | 240                              | 0.1250                    | 0.1630           | 417                                                                                 | 424                                                                                 | 343                                                                                 | 599                                                                                 | 485                                                                                 | 470                                                                                 | 24.5            | 890.0        |
| PL-AT21-X3-01-UP       | 300                              | 0.1000                    | 0.1310           | 472                                                                                 | 480                                                                                 | 395                                                                                 | 696                                                                                 | 566                                                                                 | 548                                                                                 | 27.1            | 1095.0       |
| PL-AT22-X3-01-UP       | 400                              | 0.0778                    | 0.1000           | 539                                                                                 | 549                                                                                 | 459                                                                                 | 819                                                                                 | 667                                                                                 | 646                                                                                 | 30.4            | 1395.0       |
| PL-AT23-X3-01-UP       | 500                              | 0.0605                    | 0.0870           | 617                                                                                 | 628                                                                                 | 536                                                                                 | 965                                                                                 | 787                                                                                 | 762                                                                                 | 34.3            | 1775.0       |
| PL-AT24-X3-01-UP       | 630                              | 0.0469                    | 0.0620           | 701                                                                                 | 714                                                                                 | 621                                                                                 | 1131                                                                                | 922                                                                                 | 892                                                                                 | 39.4            | 2285.0       |
| PL-AT25-X3-01-UP       | 800                              | 0.0367                    | 0.0531           | 791                                                                                 | 806                                                                                 | 714                                                                                 | 1329                                                                                | 1077                                                                                | 1042                                                                                | 44.2            | 2860.0       |

The above data is approximate and subject to manufacturing tolerances