


LOW VOLTAGE CABLES

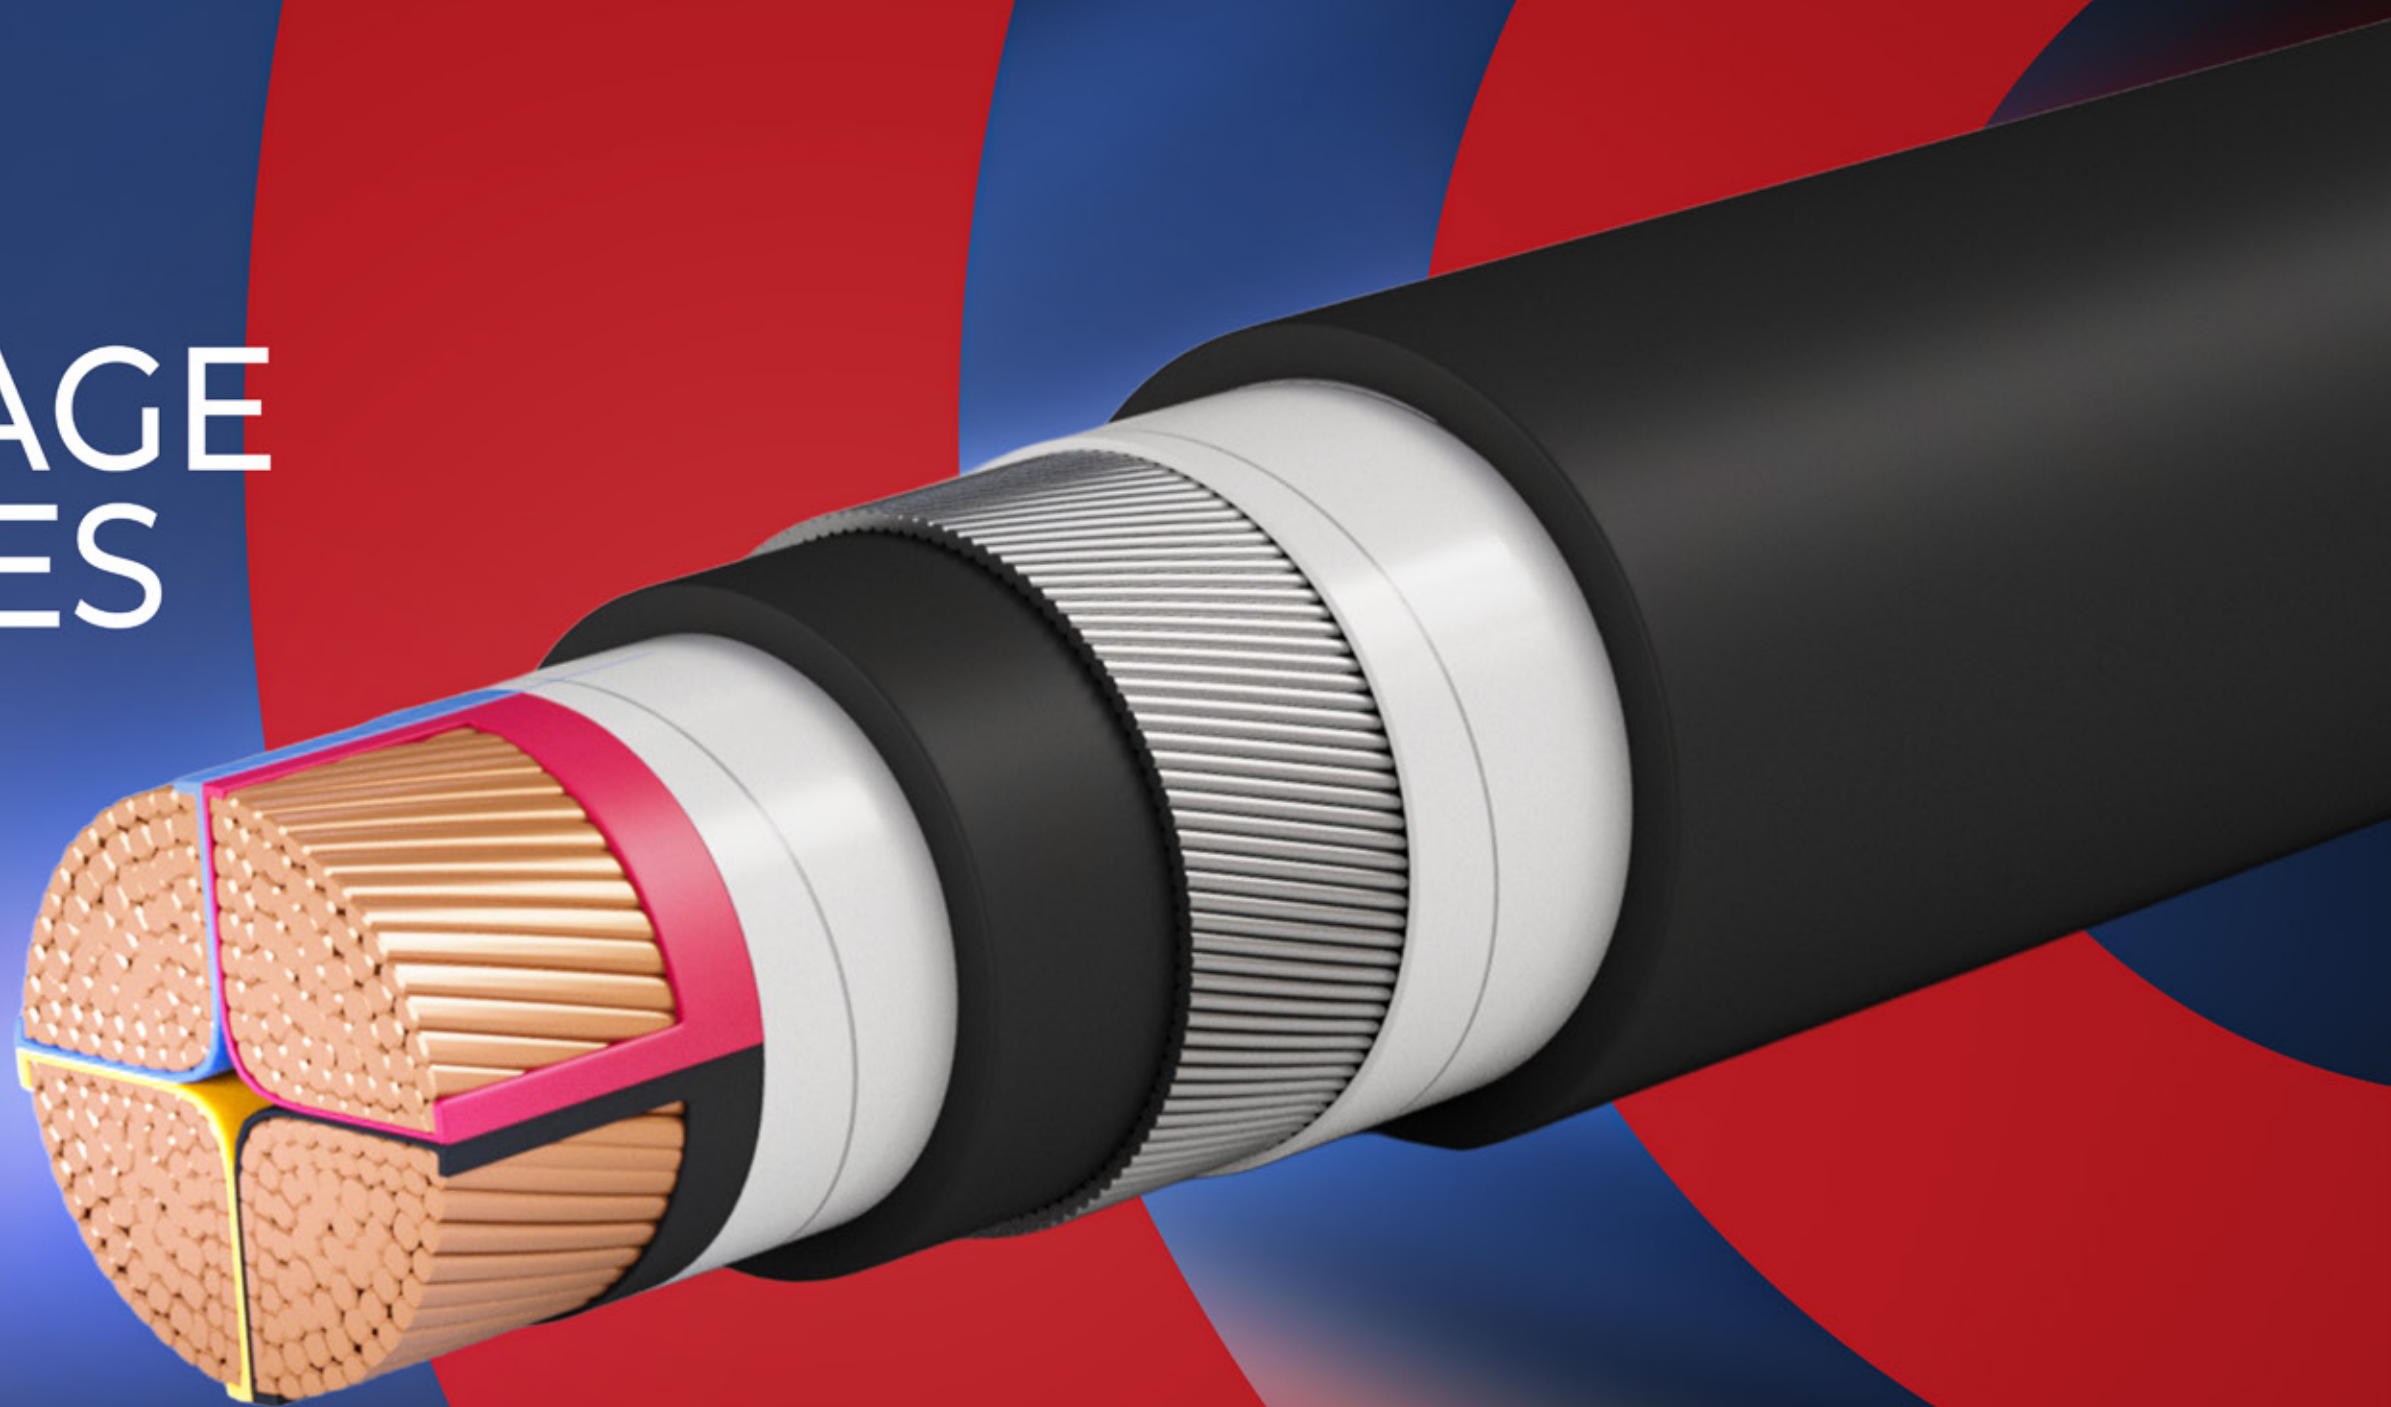

Single Core Cables, with Stranded Circular Copper
Conductors, PVC Insulated , Aluminum Tape Armoured
and PVC Sheathed

Voltage Grade

0.6 /1 (1.2) KV

Description

Soft annealed stranded Copper conductor, Insulated with PVC compound rated 70° C , Aluminum tape armoured and sheathed with PVC Compound layer.

Application


For outdoor and indoor installations in damp and wet locations where mechanical damages are expected to occur. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C Extruded
Inner Sheath	PVC Compound
Armoring	Aluminum tape armoured applied helically over the inner sheath.
Outer Sheath	Extruded PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

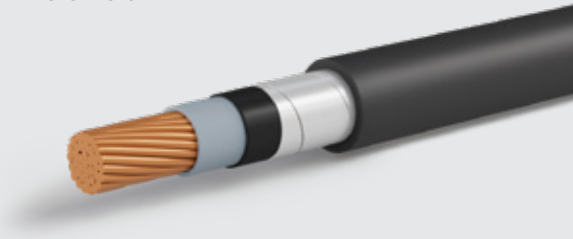

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating					Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in ground		Laid in Free Air			Diameter mm	Weight kg/km
				Flat	Trefoil	Flat separated	Flat touched	Trefoil		
										
A										
A - Copper Conductors										
PL-CT15-P3-01-DP	70	0.2680	0.3212	229	233	280	230	224	19.2	931
PL-CT16-P3-01-DP	95	0.1930	0.2317	273	278	340	281	274	21.1	1210
PL-CT17-P3-01-DP	120	0.1530	0.1841	310	316	392	325	317	22.5	1451
PL-CT18-P3-01-DP	150	0.1240	0.1497	347	353	445	371	362	24.4	1763
PL-CT19-P3-01-DP	185	0.0991	0.1203	391	398	509	427	416	26.9	2170
PL-CT20-P3-01-DP	240	0.0754	0.0926	450	460	599	506	494	29.9	2774
PL-CT21-P3-01-DP	300	0.0601	0.0750	504	517	684	581	569	32.5	3413
PL-CT22-P3-01-DP	400	0.0470	0.0601	566	582	779	669	656	36.0	4315
PL-CT23-P3-01-DP	500	0.0366	0.0488	632	654	889	769	756	39.9	5458
PL-CT24-P3-01-DP	630	0.0283	0.0402	700	728	1007	872	862	43.7	6758
PL-CT25-P3-01-DP	800	0.0221	0.0340	763	798	1121	978	970	48.7	8686

The above data is approximate and subject to manufacturing tolerances