


LOW VOLTAGE CABLES

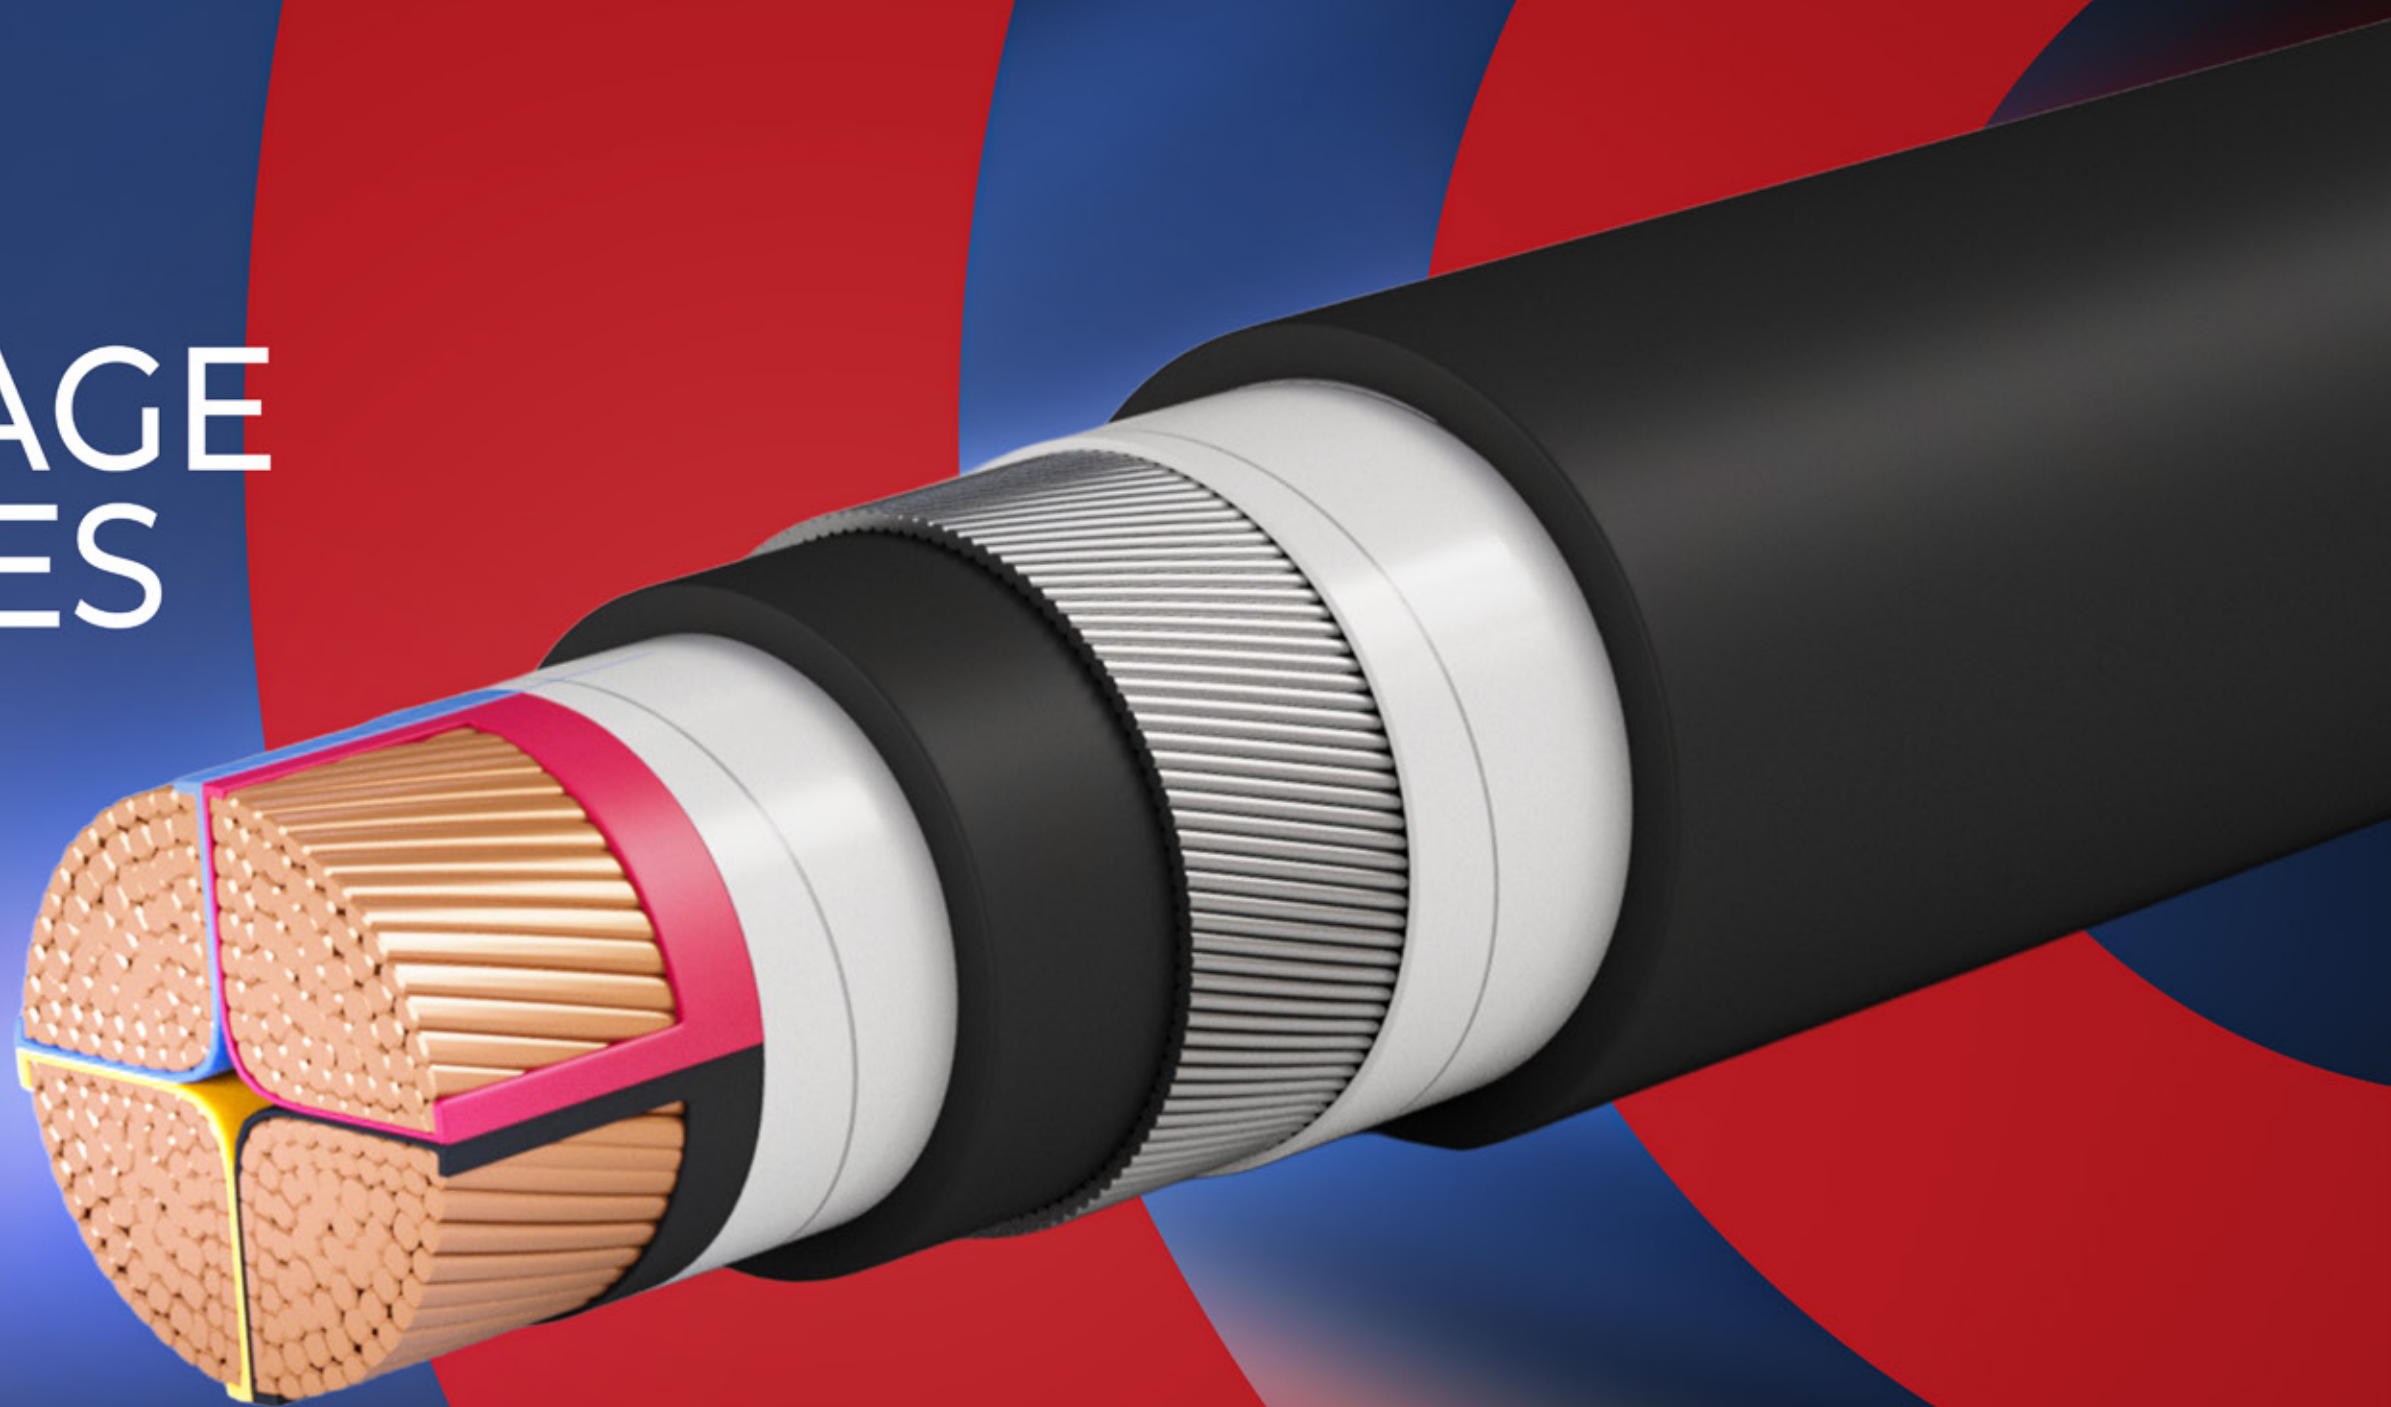

Single Core Cables, with Stranded Circular Copper
Conductors, PVC Insulated , Aluminum Wire Armoured
and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Soft annealed stranded Copper conductor, Insulated with PVC compound
rated 70° C , Aluminum Wire armoured and sheathed with PVC
Compound layer.

Application


For outdoor and indoor installations in damp and wet locations where
mechanical damages are expected to occur. They are normally used
for power distribution in urban networks, industrial plants, as well as in
thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C
Inner Sheath	Extruded PVC Compound
Armoring	Aluminum wire armoured applied over the inner sheath.
Outer Sheath	Extruded PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC
sheathed are available according to customer request

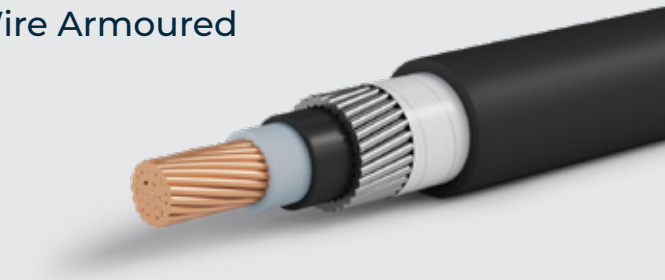

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating					Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in ground		Laid in Free Air			Diameter mm	Weight kg/km
				Flat  A	Trefoil  A	Flat separated  A	Flat touched  A	Trefoil  A		
A - Copper Conductors										
PL-CT12-P3-01-RP	25	0.7270	0.8700	133	136	156	130	126	16.3	512
PL-CT13-P3-01-RP	35	0.5240	0.6272	160	163	190	158	154	17.6	637
PL-CT14-P3-01-RP	50	0.3870	0.4634	189	191	228	190	185	19.1	788
PL-CT15-P3-01-RP	70	0.2680	0.3212	230	234	283	237	231	20.9	1026
PL-CT16-P3-01-RP	95	0.1930	0.2316	272	278	340	287	281	22.8	1311
PL-CT17-P3-01-RP	120	0.1530	0.1840	307	315	389	330	323	24.4	1569
PL-CT18-P3-01-RP	150	0.1240	0.1496	342	351	437	374	367	26.3	1890
PL-CT19-P3-01-RP	185	0.0991	0.1202	382	394	493	427	420	28.6	2301
PL-CT20-P3-01-RP	240	0.0754	0.0924	435	452	568	499	493	31.6	2914
PL-CT21-P3-01-RP	300	0.0601	0.0747	477	500	630	563	561	35.0	3644
PL-CT22-P3-01-RP	400	0.0470	0.0598	526	557	699	636	639	38.3	4554
PL-CT23-P3-01-RP	500	0.0366	0.0484	576	615	776	716	726	42.2	5726
PL-CT24-P3-01-RP	630	0.0283	0.0397	623	673	850	794	812	46.2	7097
PL-CT25-P3-01-RP	800	0.0221	0.0333	639	703	897	846	877	52.2	9190

The above data is approximate and subject to manufacturing tolerances