


LOW VOLTAGE CABLES

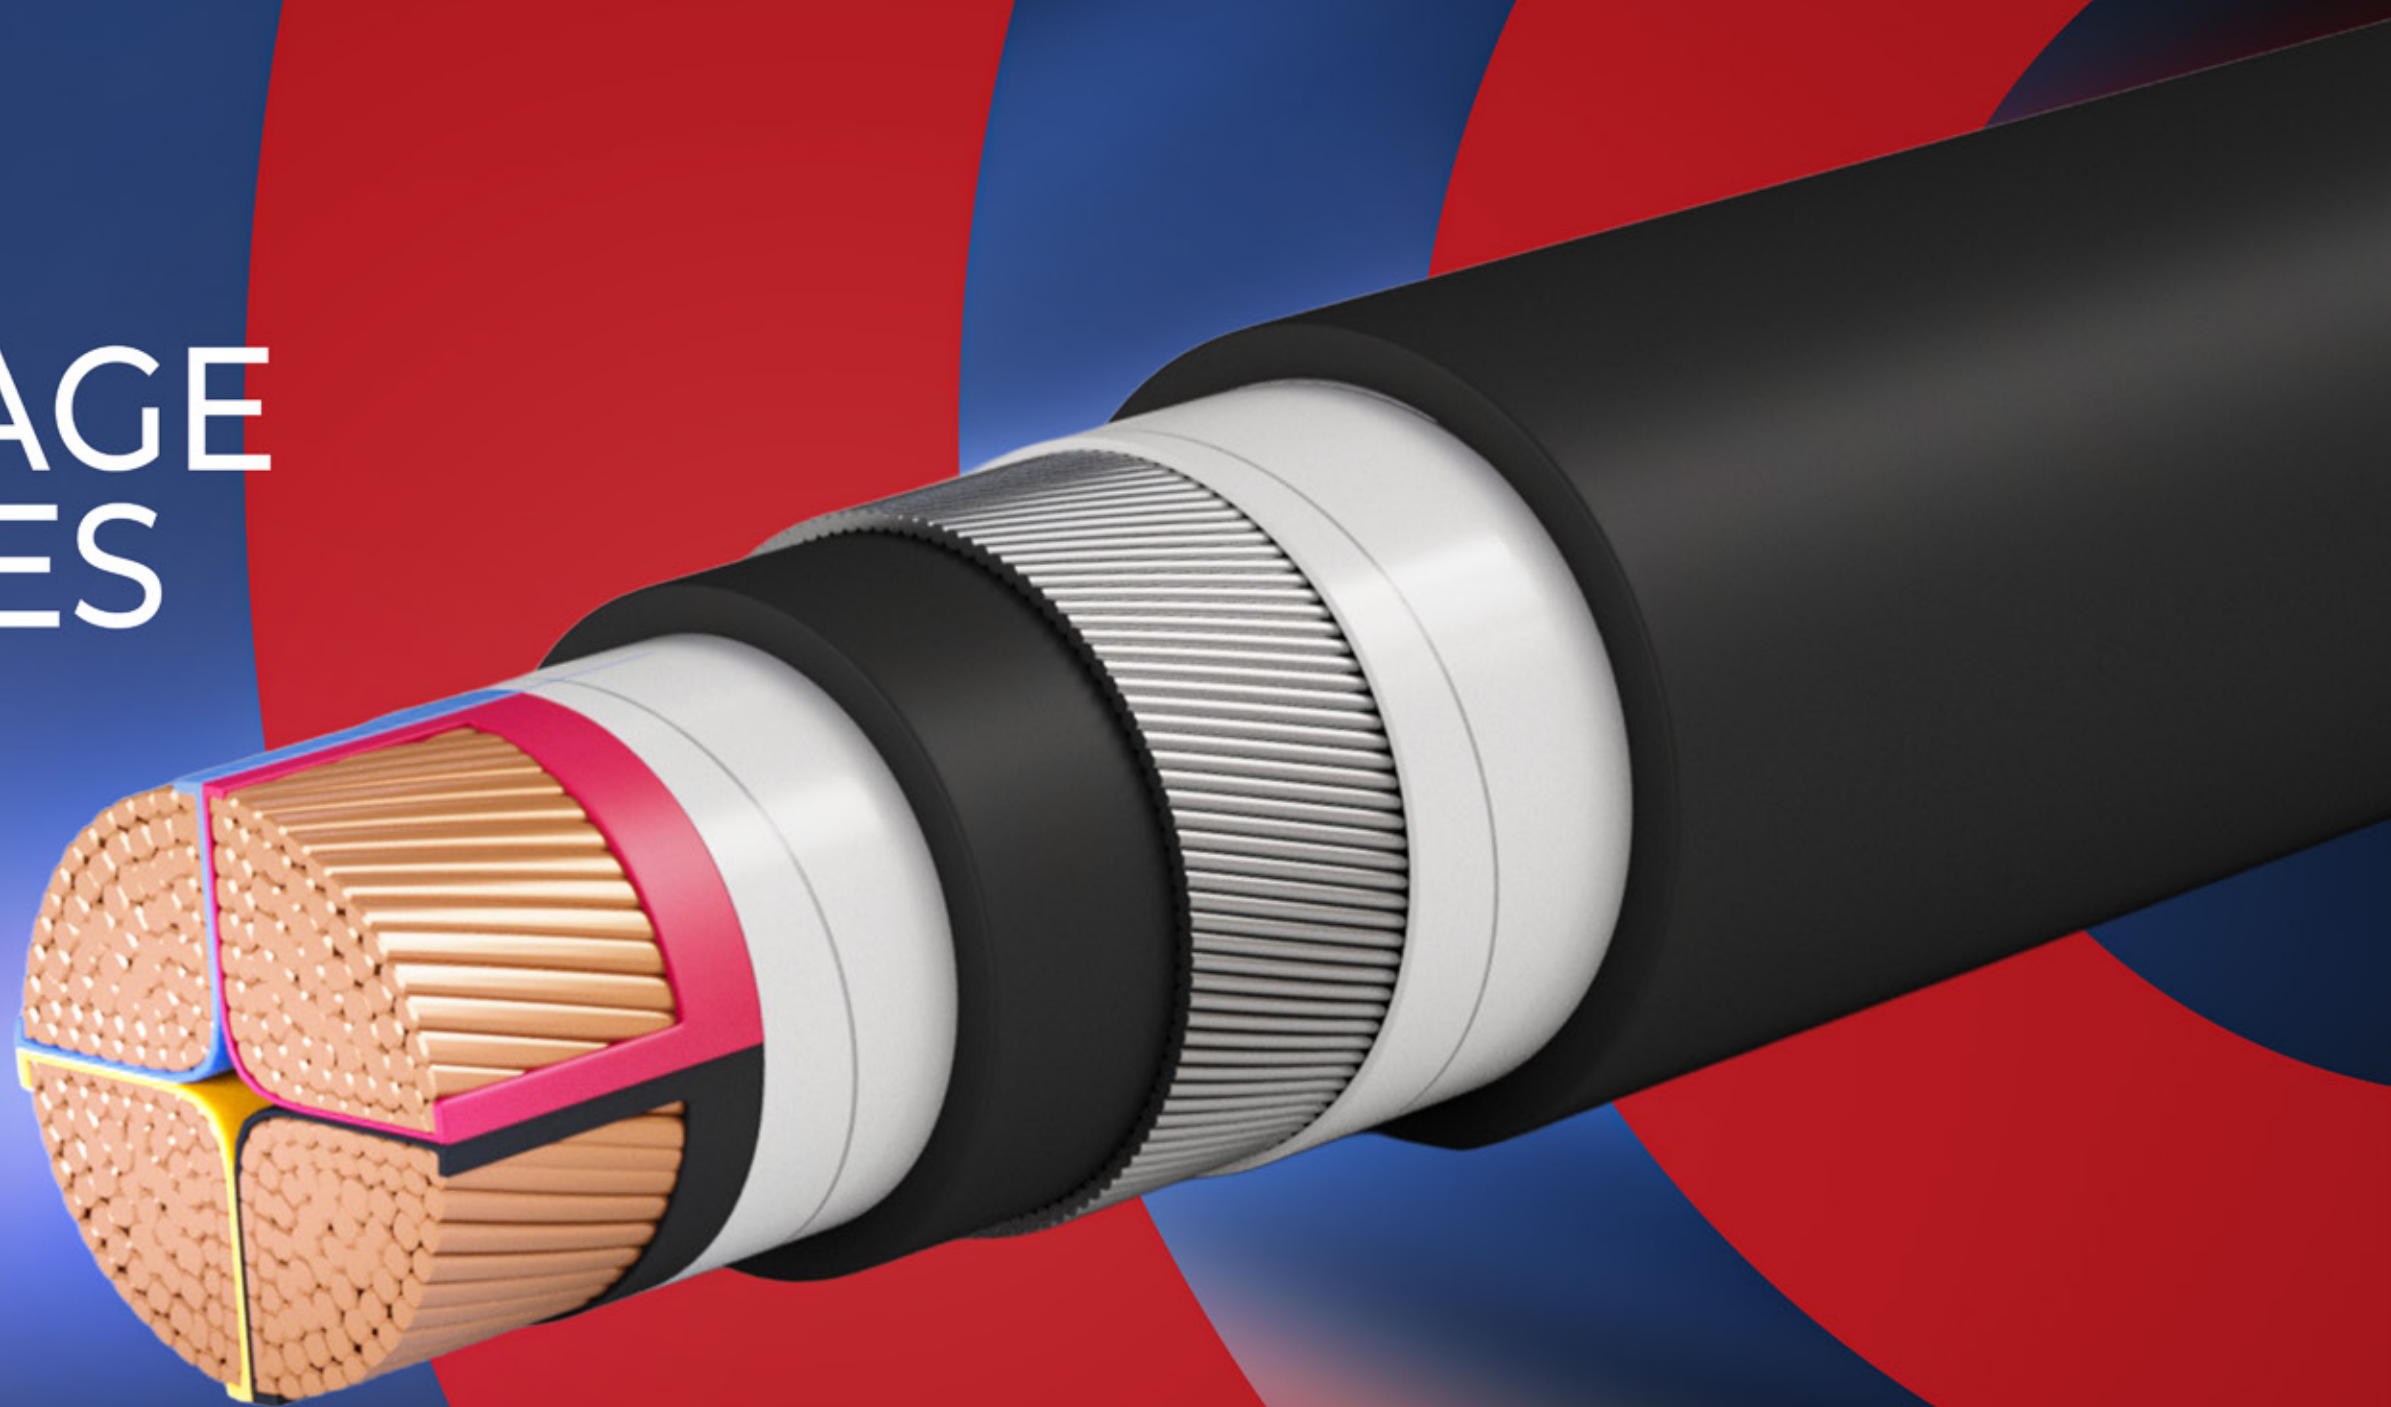

Single Core Cables, With Stranded Circular Copper
Conductors, PVC Insulated And PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Soft annealed stranded Copper conductor, Insulated with PVC compound rated 70° C and sheathed with PVC Compound layer.

Application


For outdoor and indoor installations in damp and wet locations. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C Extruded
Outer Sheath	PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/ and PVC sheathed are available according to customer request

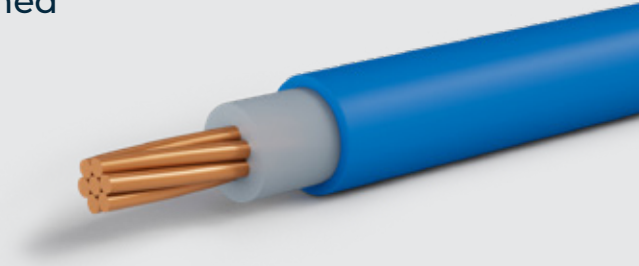

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating						Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in ground			Laid in Free Air			Diameter mm	Weight kg/km
				Flat	Trefoil	Laid in duct	Flat separated	Flat touched	Trefoil		
											
A- Copper Conductors											
PL-CT08-P3-01-UP	4	4.6100	5.5100	49	49	36	50	37	35	6.9	90
PL-CT09-P3-01-UP	6	3.0800	3.6800	60	61	45	65	48	46	7.5	110
PL-CT10-P3-01-UP	10	1.8300	2.1700	83	81	62	85	67	59	8.1	150
PL-CT11-P3-01-UP	16	1.1500	1.3700	107	103	77	110	86	75	9.1	210
PL-CT12-P3-01-UP	25	0.7270	0.8600	133	134	97	143	112	109	10.6	310
PL-CT13-P3-01-UP	35	0.5240	0.6300	159	161	118	176	138	134	11.7	410
PL-CT14-P3-01-UP	50	0.3870	0.4600	189	191	142	214	170	165	13.2	545
PL-CT15-P3-01-UP	70	0.2680	0.3200	231	234	176	271	215	209	15.0	755
PL-CT16-P3-01-UP	95	0.1930	0.2300	275	280	215	332	267	259	17.1	1020
PL-CT17-P3-01-UP	120	0.1530	0.1900	313	318	245	386	310	301	18.5	1250
PL-CT18-P3-01-UP	150	0.1240	0.1500	352	356	280	442	357	347	20.2	1535
PL-CT19-P3-01-UP	185	0.0991	0.1200	396	403	320	510	415	402	22.7	1920
PL-CT20-P3-01-UP	240	0.0754	0.0920	459	466	377	608	496	481	25.7	2495
PL-CT21-P3-01-UP	300	0.0601	0.0750	517	525	432	704	575	558	28.5	3125
PL-CT22-P3-01-UP	400	0.0470	0.0590	585	594	495	819	669	648	31.8	3980
PL-CT23-P3-01-UP	500	0.0366	0.0480	659	671	570	957	777	753	35.7	5090
PL-CT24-P3-01-UP	630	0.0283	0.0390	737	751	645	1113	893	864	39.5	6390
PL-CT25-P3-01-UP	800	0.0221	0.0350	813	829	723	1284	1014	982	43.8	8205

The above data is approximate and subject to manufacturing tolerances