


LOW VOLTAGE CABLES

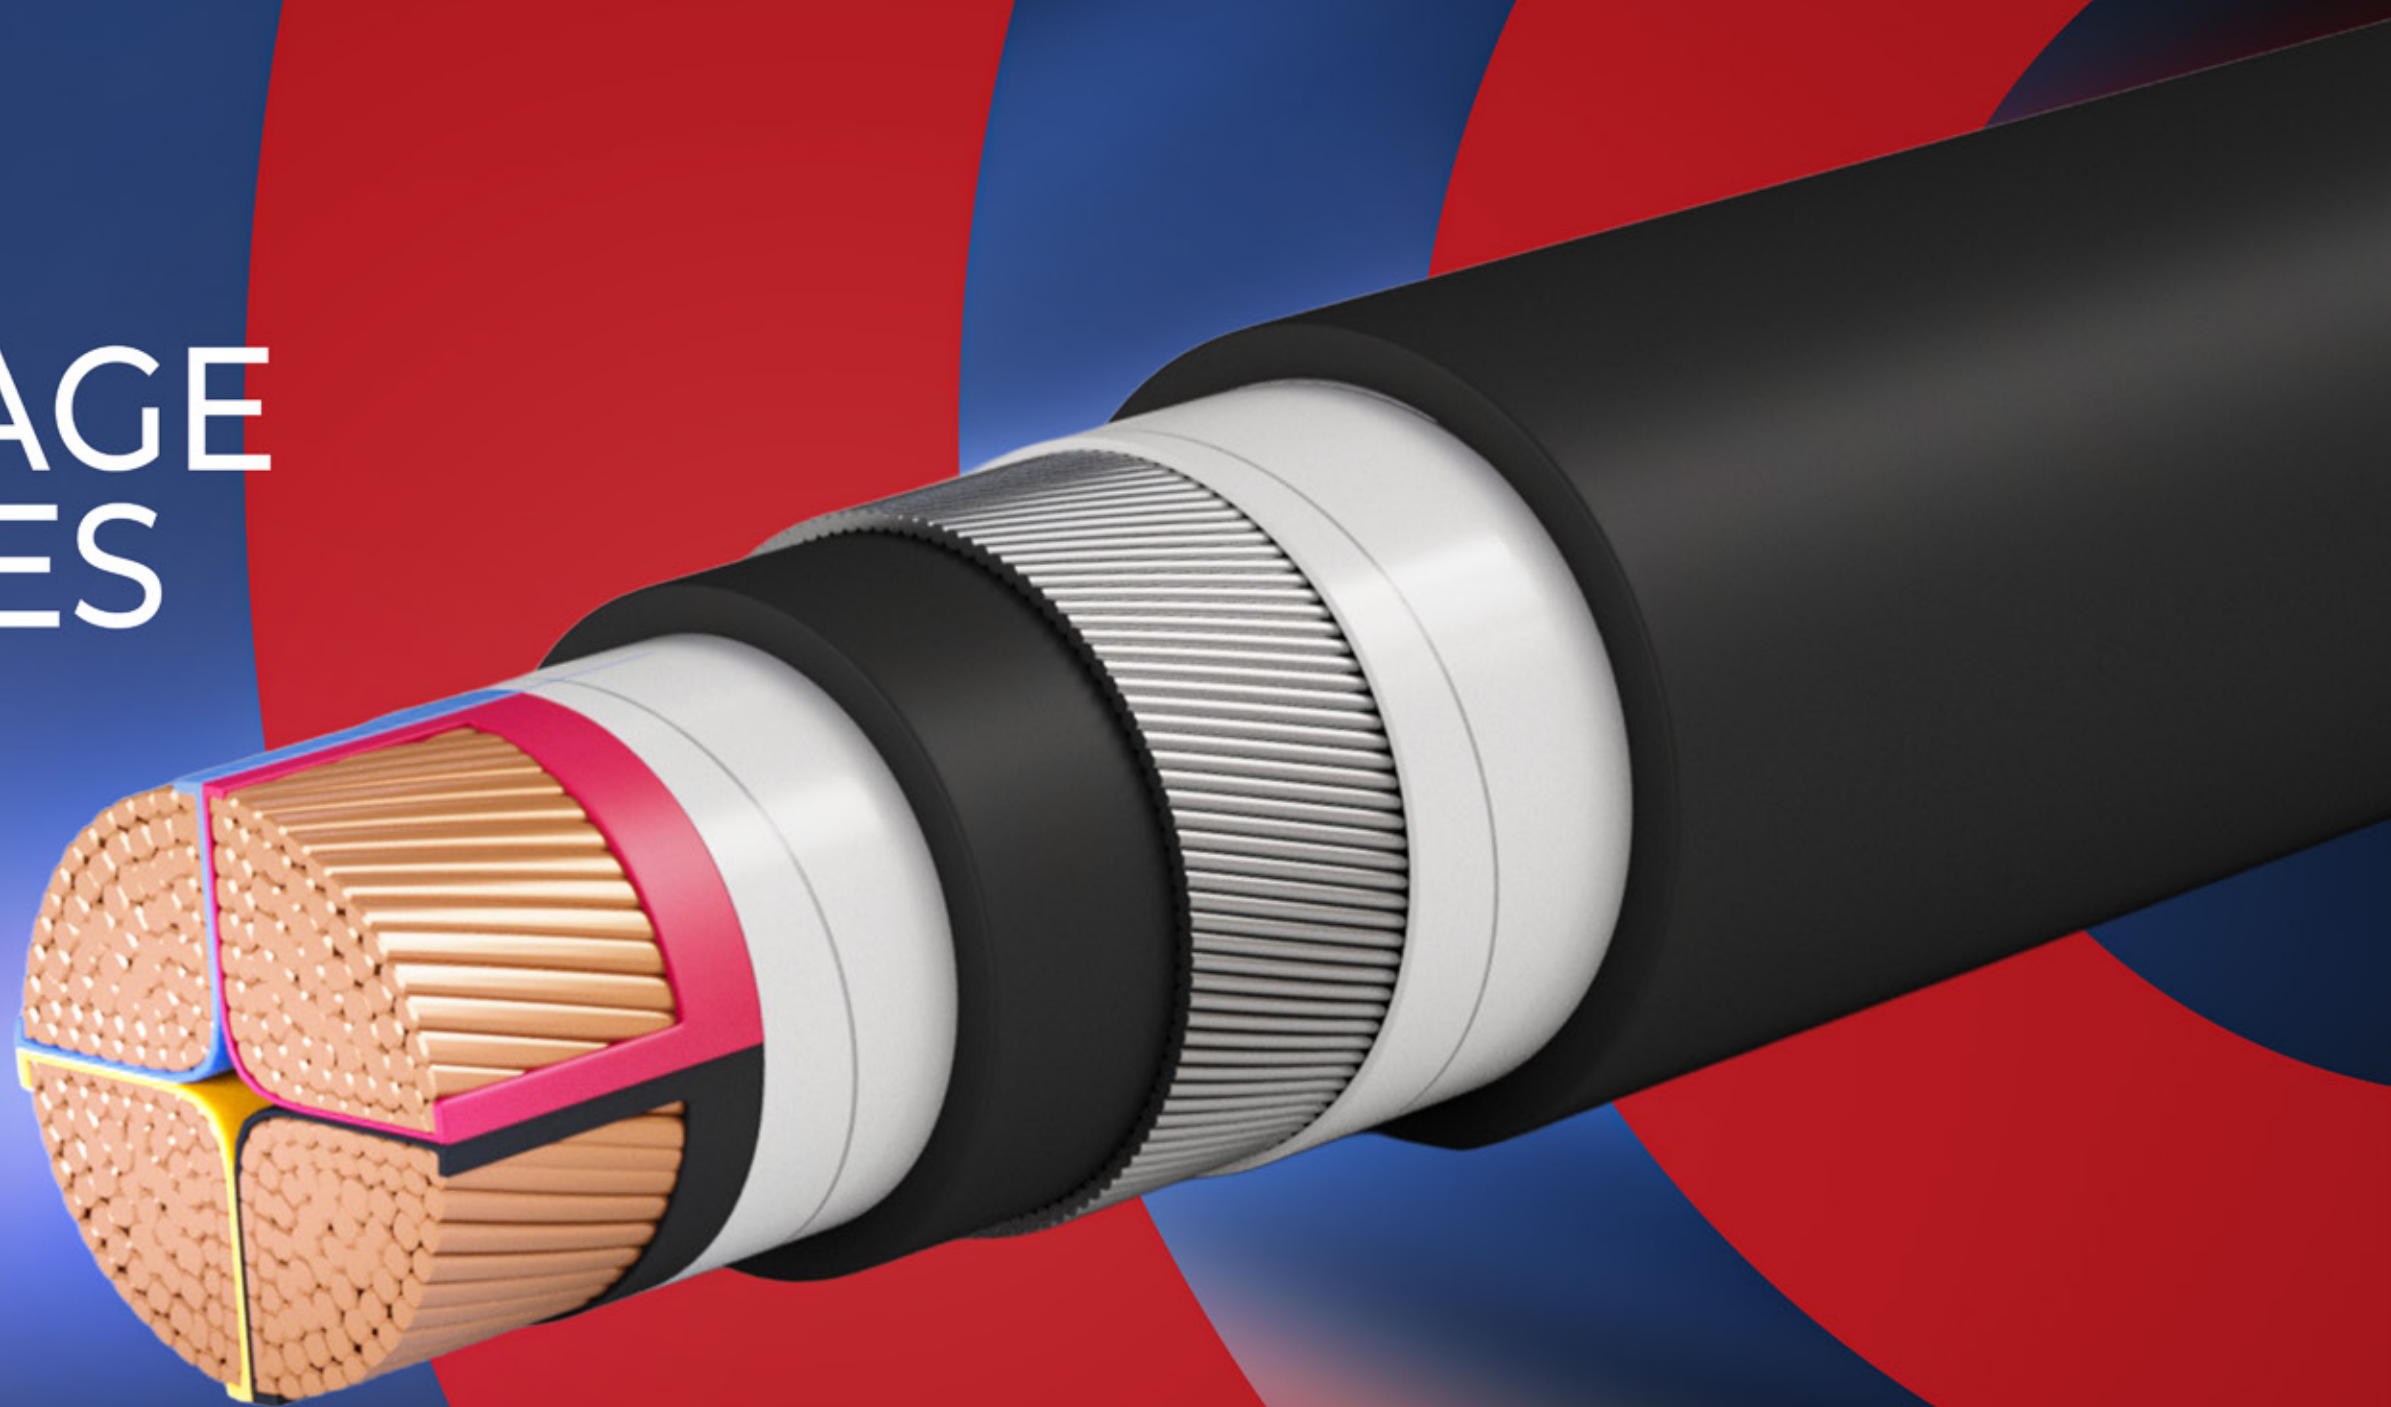

Single Core Cables, with Stranded Circular Copper
Conductors, XLPE Insulated , Aluminum Tape Armoured
and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Soft annealed stranded Copper conductor, Insulated with XLPE compound rated 90° C , Aluminum tape armoured and sheathed with PVC Compound layer.

Application


For outdoor and indoor installations in damp and wet locations where mechanical damages are expected to occur. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2
Insulation	Extruded XLPE Compound Rated 90° C
Inner Sheath	Extruded PVC Compound
Armoring	Aluminum tape armoured applied helically over the inner sheath.
Outer Sheath	Extruded PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

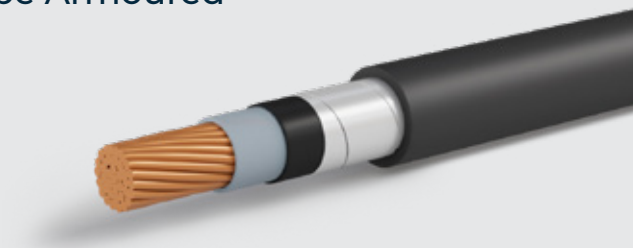

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating					Approx. Overall	Approx.
				Laid in ground		Laid in Free Air				
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Flat 	Trefoil 	Flat separated 	Flat touched 	Trefoil 	Diameter mm	Weight kg/km
				A	A	A	A	A		
A - Copper Conductors										
PL-CT15-X3-01-DP	70	0.2680	0.3423	267	270	352	287	279	18.6	881
PL-CT16-X3-01-DP	95	0.1930	0.2469	318	323	429	351	341	20.1	1133
PL-CT17-X3-01-DP	120	0.1530	0.1962	361	367	495	406	395	21.7	1376
PL-CT18-X3-01-DP	150	0.1240	0.1595	404	411	563	465	452	23.6	1676
PL-CT19-X3-01-DP	185	0.0991	0.1281	454	464	646	536	522	25.9	2055
PL-CT20-X3-01-DP	240	0.0754	0.0985	524	536	762	636	620	28.7	2627
PL-CT21-X3-01-DP	300	0.0601	0.0797	589	604	872	732	715	31.3	3247
PL-CT22-X3-01-DP	400	0.0470	0.0638	661	680	997	846	828	34.6	4104
PL-CT23-X3-01-DP	500	0.0366	0.0516	741	765	1141	975	957	38.5	5209
PL-CT24-X3-01-DP	630	0.0283	0.0423	821	852	1291	1110	1094	42.9	6560
PL-CT25-X3-01-DP	800	0.0221	0.0356	897	937	1439	1248	1236	48.3	8464

The above data is approximate and subject to manufacturing tolerances