


LOW VOLTAGE CABLES

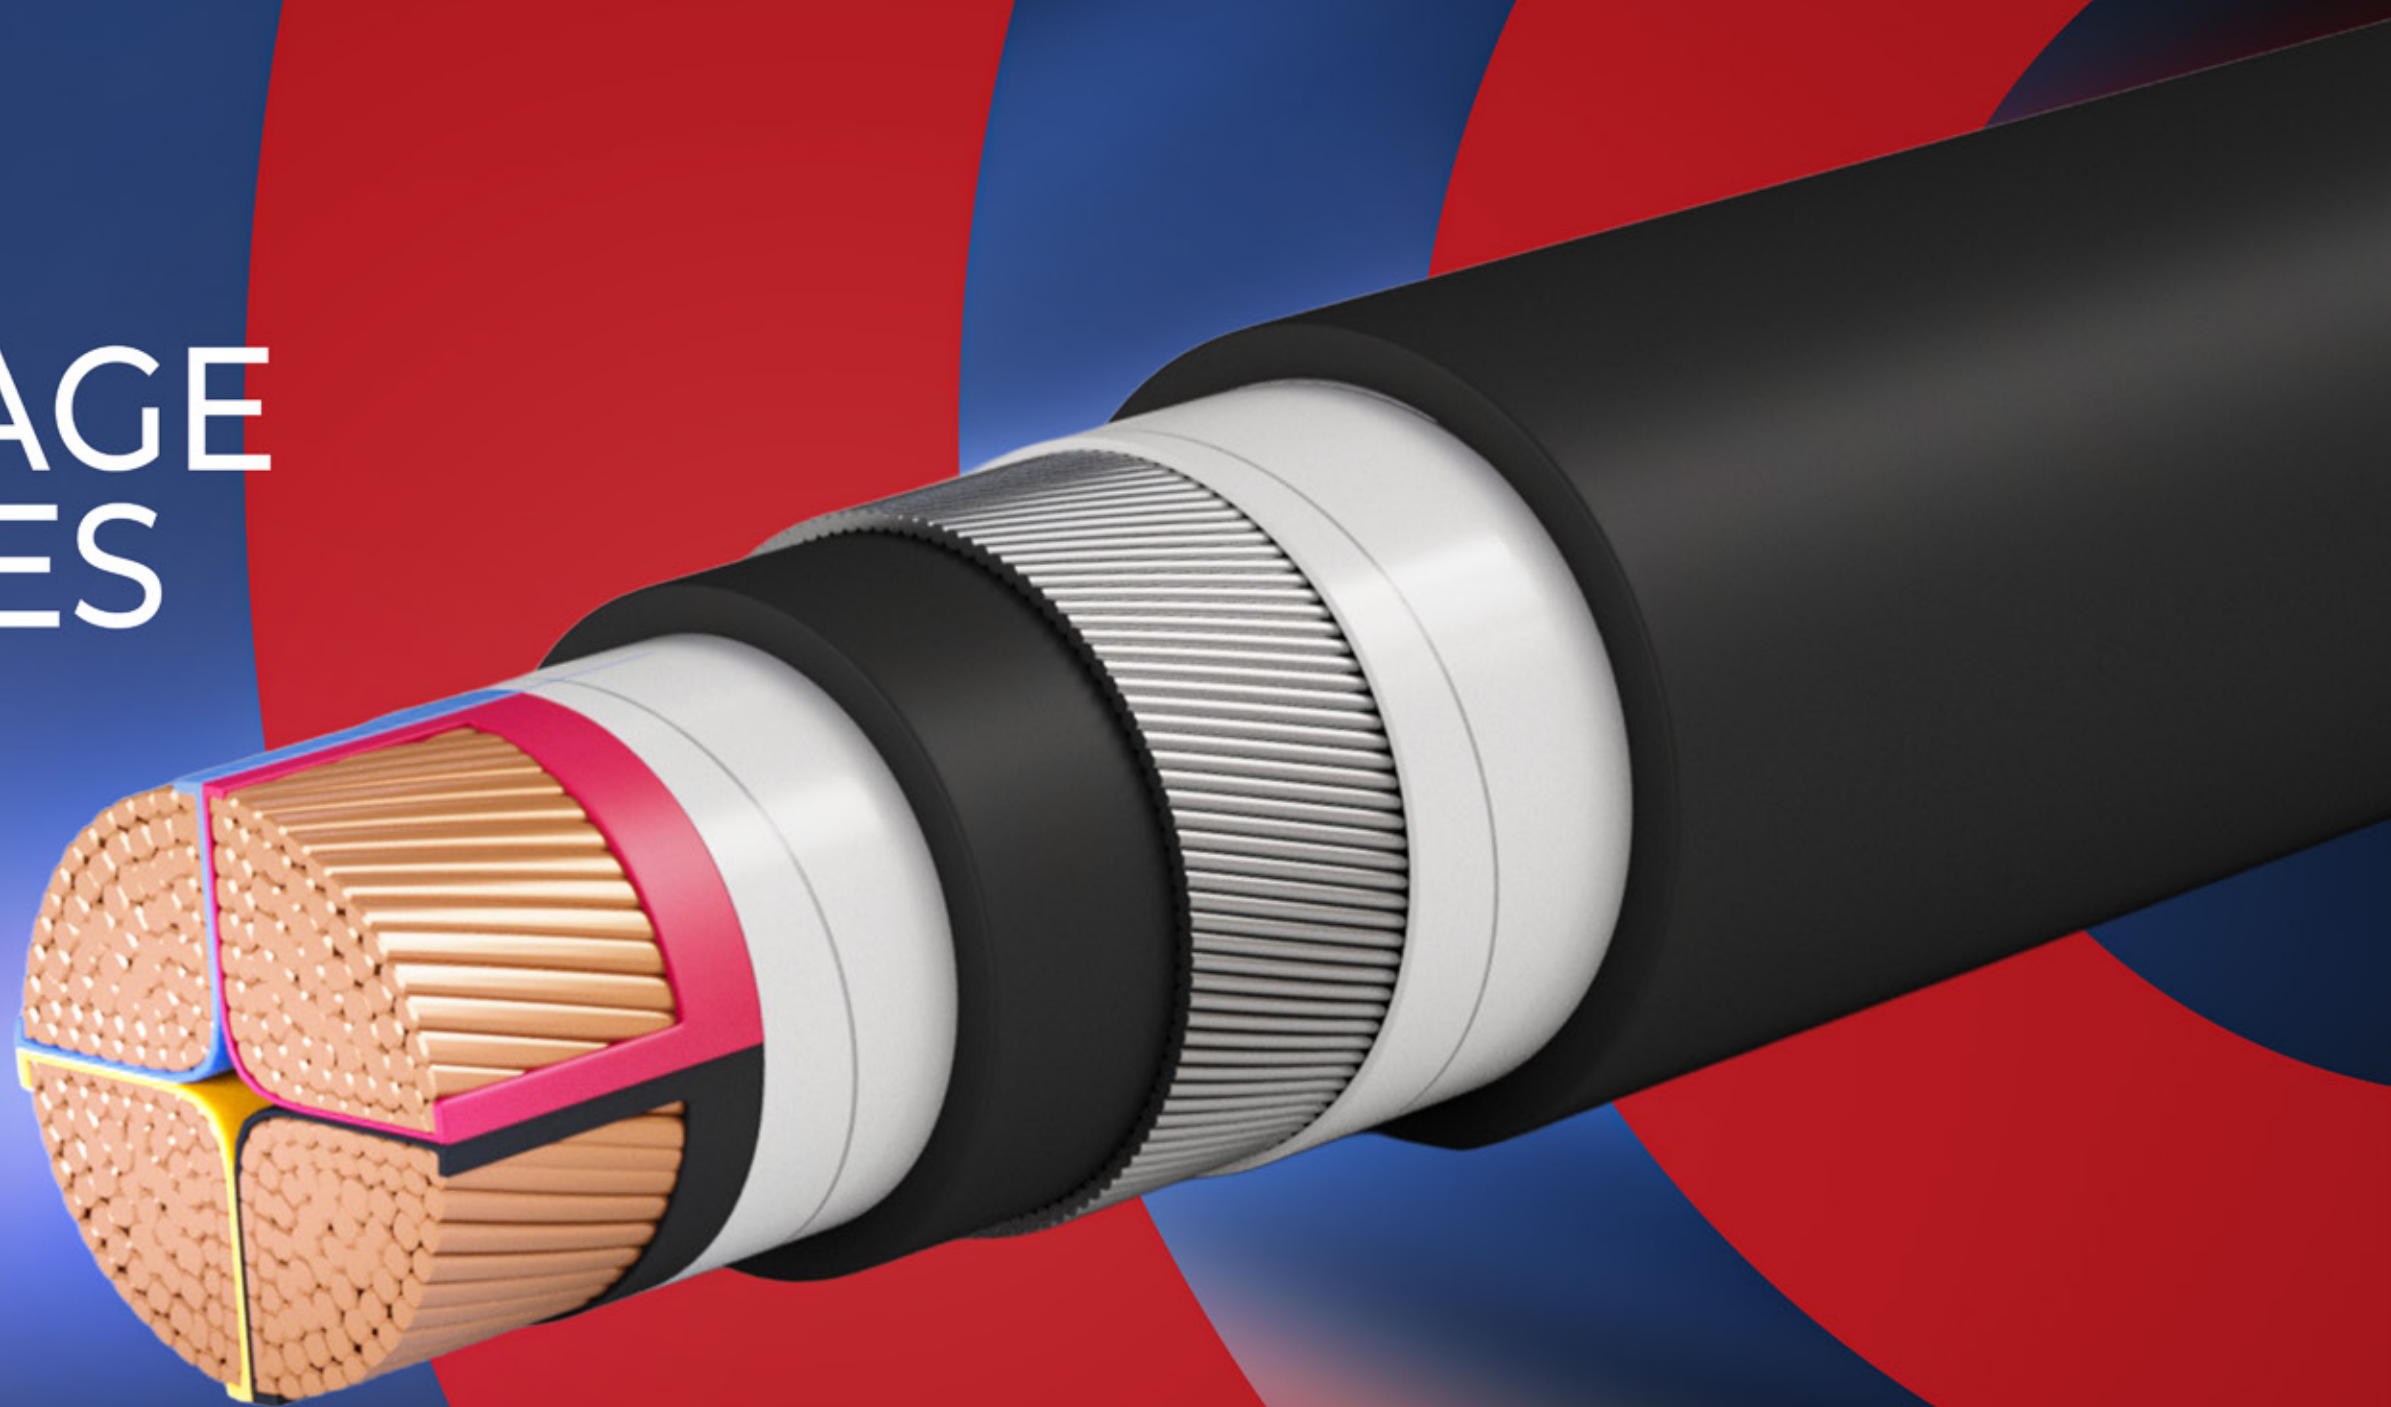

Single Core Cables, with Stranded Circular Copper
Conductors, XLPE Insulated , Aluminum Wire Armoured
and PVC Sheathed

Voltage Grade

0.6 /1 (1.2) KV

Description

Soft annealed stranded Copper conductor, Insulated with XLPE compound rated 90° C , Aluminum Wire armoured and sheathed with PVC Compound layer.

Application

For outdoor and indoor installations in damp and wet locations where mechanical damages are expected to occur. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2
Insulation	Extruded XLPE Compound Rated 90° C
Inner Sheath	Extruded PVC Compound
Armoring	Aluminum wire armoured applied over the inner sheath.
Outer Sheath	Extruded PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating					Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in ground		Laid in Free Air			Diameter mm	Weight kg/km
				Flat  A	Trefoil  A	Flat separated  A	Flat touched  A	Trefoil  A		
A - Copper Conductors										
PL-CT12-X3-01-RP	25	0.7270	0.9271	156	158	198	162	158	15.7	478
PL-CT13-X3-01-RP	35	0.5240	0.6684	187	190	240	197	192	16.8	590
PL-CT14-X3-01-RP	50	0.3870	0.4938	220	224	288	238	232	18.3	735
PL-CT15-X3-01-RP	70	0.2680	0.3422	268	272	358	297	289	20.3	973
PL-CT16-X3-01-RP	95	0.1930	0.2468	317	324	431	360	351	21.8	1229
PL-CT17-X3-01-RP	120	0.1530	0.1960	358	367	493	414	405	23.6	1492
PL-CT18-X3-01-RP	150	0.1240	0.1593	399	409	555	471	461	25.3	1790
PL-CT19-X3-01-RP	185	0.0991	0.1279	446	460	628	538	529	27.8	2193
PL-CT20-X3-01-RP	240	0.0754	0.0983	509	527	726	630	622	30.6	2781
PL-CT21-X3-01-RP	300	0.0601	0.0794	565	589	814	717	711	33.2	3413
PL-CT22-X3-01-RP	400	0.0470	0.0635	619	653	898	809	810	37.1	4349
PL-CT23-X3-01-RP	500	0.0366	0.0512	679	724	997	913	923	41.0	5486
PL-CT24-X3-01-RP	630	0.0283	0.0418	737	795	1097	1019	1038	45.2	6846
PL-CT25-X3-01-RP	800	0.0221	0.0349	759	833	1152	1088	1126	51.8	8957

The above data is approximate and subject to manufacturing tolerances