


LOW VOLTAGE CABLES

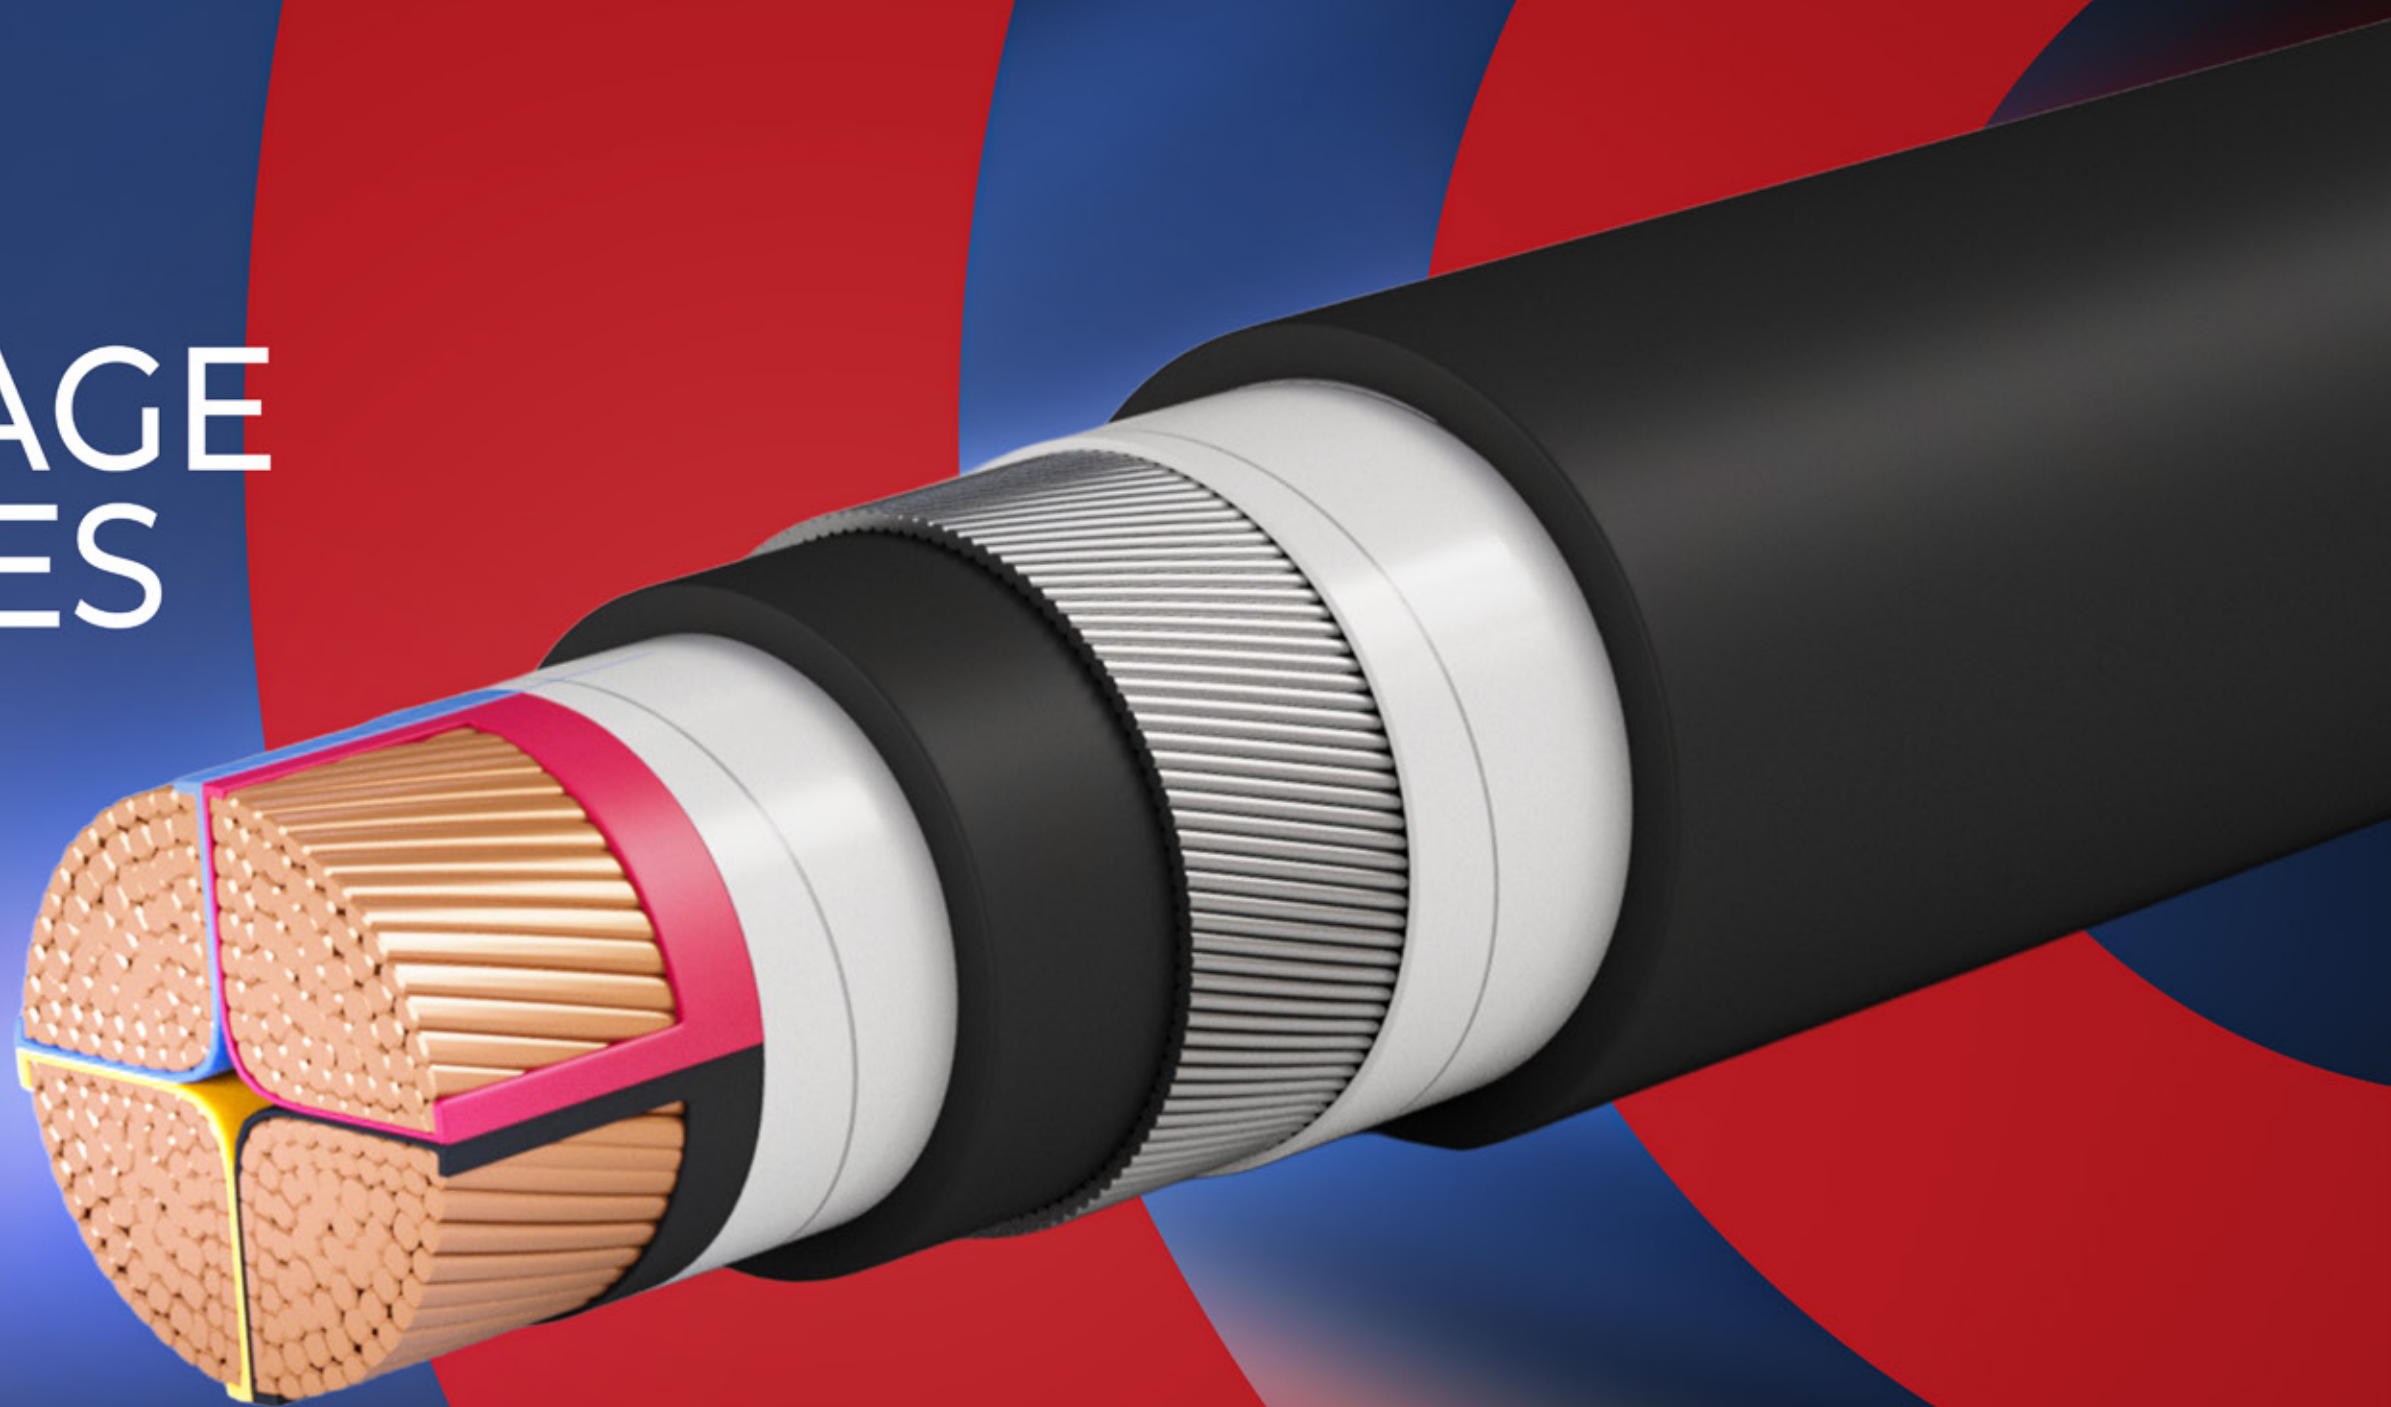

Single Core Cables, With Stranded Circular Copper
Conductors, XLPE Insulated And PVC Sheathed

Voltage Grade

0.6 /1 (1.2) KV

Description

Soft annealed stranded Copper conductor, Insulated with XLPE compound rated 90° C and sheathed with PVC Compound layer.

Application

For outdoor and indoor installations in damp and wet locations. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502 or BS 7889
Conductor	Plain copper conductor class 2
Insulation	Extruded XLPE Compound Rated 90° C
Outer Sheath	Extruded PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/ and PVC sheathed are available according to customer request

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating						Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in ground			Laid in Free Air			Diameter mm	Weight kg/km
				Flat  A	Trefoil  A	Laid in duct  A	Flat separated  A	Flat touched  A	Trefoil  A		

A - Copper Conductors											
PL-CT08-X3-01-UP	4	4.6100	5.8800	55	55	40	65	47	44	6.3	75
PL-CT09-X3-01-UP	6	3.0800	3.9300	70	71	54	80	59	59	6.9	95
PL-CT10-X3-01-UP	10	1.8300	2.3300	111	97	77	113	87	75	7.5	135
PL-CT11-X3-01-UP	16	1.1500	1.4700	131	125	98	157	121	105	8.5	190
PL-CT12-X3-01-UP	25	0.7270	0.9270	154	156	113	179	138	134	10.0	285
PL-CT13-X3-01-UP	35	0.5240	0.6690	185	187	137	219	171	166	11.1	380
PL-CT14-X3-01-UP	50	0.3870	0.4940	219	222	165	269	210	204	12.4	505
PL-CT15-X3-01-UP	70	0.2680	0.3430	268	272	205	339	268	260	14.4	710
PL-CT16-X3-01-UP	95	0.1930	0.2480	320	325	249	419	331	321	16.1	955
PL-CT17-X3-01-UP	120	0.1530	0.1970	364	369	286	486	386	375	17.7	1185
PL-CT18-X3-01-UP	150	0.1240	0.1600	408	414	325	558	446	433	19.4	1455
PL-CT19-X3-01-UP	185	0.0991	0.1290	461	468	374	649	519	503	21.7	1815
PL-CT20-X3-01-UP	240	0.0754	0.0990	534	542	439	763	622	602	24.5	2360
PL-CT21-X3-01-UP	300	0.0601	0.0810	602	612	503	886	722	699	27.1	2960
PL-CT22-X3-01-UP	400	0.0470	0.0638	681	692	579	1033	842	815	30.4	3785
PL-CT23-X3-01-UP	500	0.0366	0.0517	768	781	667	1219	981	950	34.3	4860
PL-CT24-X3-01-UP	630	0.0283	0.0425	860	876	762	1415	1132	1096	38.7	6175
PL-CT25-X3-01-UP	800	0.0221	0.0366	950	969	858	1634	1291	1249	43.4	7990

The above data is approximate and subject to manufacturing tolerances