

Multicores Copper & Aluminum Conductors

XLPE Insulated, Steel Tape armored and PVC Sheathed

Voltage Grade

12 / 20 (24) KV

Description


Soft annealed Stranded circular compacted Copper or Stranded circular compactedAluminum conductor, semiconducting layer as conductor screen, XLPE insulated, semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, three cores assembled together with non hygroscopic Polypropylene fillers, banded with suitable tape, armored with steel tape and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and binded with a Copper tape to achieve electrical contact Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Assembly	The insulated Cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Double Steel Tapes applied helically over the inner sheath.
Outer Sheath	Extruded PVC Compound
Cores Indentification	by inserting Red, Yellow, Blue narrow plastic tapes between the non metallic & the metallic insulation screen, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request

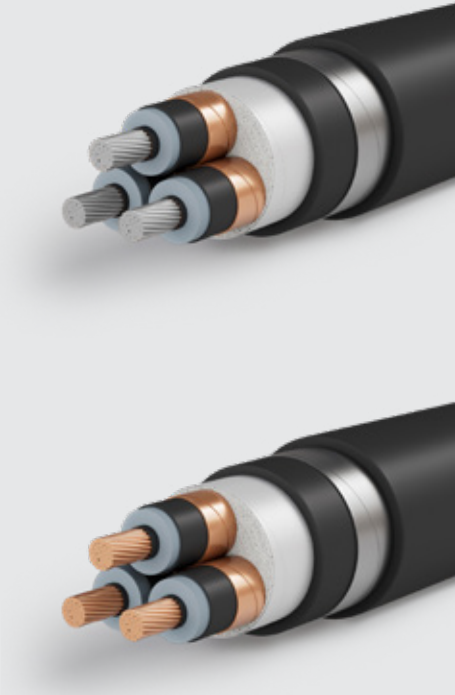

MEDIUM VOLTAGE CABLES

Maximum Operating Temp. 90° C

Minimum bending Radius 12 x outer diameter

Packing Condition Our standard length on Wooden Drum / or according to customer request

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Operating Capacitance	Inductance	Current Rating		Approx. Overall Diameter	Approx. Weight
		DC at 20 °C	AC at 90° C			Laid in Ground	Laid in Free Air		
					mm²	Ω/km	Ω/km	μF/km	mH/km
	A - Copper Conductors								
PM-CT14-X8-03-TP	50	0.3870	0.4958	0.1836	0.3904	207	216	53.7	4240
PM-CT15-X8-03-TP	70	0.2680	0.3436	0.2087	0.3671	255	269	57.6	5105
PM-CT16-X8-03-TP	95	0.1930	0.2480	0.2294	0.3501	302	321	61.2	6080
PM-CT17-X8-03-TP	120	0.1530	0.1972	0.2486	0.3353	342	367	64.8	7040
PM-CT18-X8-03-TP	150	0.1240	0.1604	0.2692	0.3256	384	416	68.7	8245
PM-CT19-X8-03-TP	185	0.0991	0.1291	0.2937	0.3143	432	471	72.8	9575
PM-CT20-X8-03-TP	240	0.0754	0.0996	0.3249	0.2998	498	554	78.8	12140
PM-CT21-X8-03-TP	300	0.0601	0.0810	0.3547	0.2906	560	630	84.0	14320
PM-CT22-X8-03-TP	400	0.0470	0.0656	0.3912	0.2823	629	715	90.9	17455
PM-CT23-X8-03-TP	500	0.0366	0.0540	0.4357	0.2730	703	814	98.6	21265
B - Aluminum Conductors									
PM-AT14-X8-03-TP	50	0.6410	0.8251	0.1892	0.3844	161	168	54.6	3440
PM-AT15-X8-03-TP	70	0.4430	0.5706	0.2101	0.3649	197	208	57.8	3880
PM-AT16-X8-03-TP	95	0.3200	0.4125	0.2322	0.3483	235	250	61.7	4415
PM-AT17-X8-03-TP	120	0.2530	0.3265	0.2500	0.3344	267	286	65.1	4925
PM-AT18-X8-03-TP	150	0.2060	0.2658	0.2733	0.3236	299	323	69.4	5635
PM-AT19-X8-03-TP	185	0.1640	0.2125	0.2978	0.3113	339	369	73.0	6275
PM-AT20-X8-03-TP	240	0.1250	0.1628	0.3249	0.2998	392	435	78.8	7765
PM-AT21-X8-03-TP	300	0.1000	0.1312	0.3547	0.2906	443	497	84.0	8770
PM-AT22-X8-03-TP	400	0.0778	0.1035	0.3912	0.2823	503	571	90.9	10345
PM-AT23-X8-03-TP	500	0.0605	0.0825	0.4357	0.2730	572	661	98.6	12085

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request
Galvanzied Steel Tapes is available according to customer request