

Multicores Copper & Aluminum Conductors

XLPE Insulated, Steel Wires armored and PVC Sheathed

Voltage Grade

12 / 20 (24) KV

Description


Soft annealed Stranded circular compacted Copper or Stranded circular compacted Aluminum conductor, semiconducting layer as conductor screen, XLPE insulated, semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, three cores assembled together with non hygroscopic Polypropylene fillers, banded with suitable tape, armored with Galvanized steel wires, banded with suitable tape and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502 or BS 6622
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and binded with a Copper tape to achieve electrical contact Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Assembly	The insulated Cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Galvanzied Steel Wires over the inner sheath.
Outer Sheath	Extruded PVC Compound
Cores Indentification	by inserting Red, Yellow, Blue narrow plastic tapes between the non metallic & the metallic insulation screen, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request

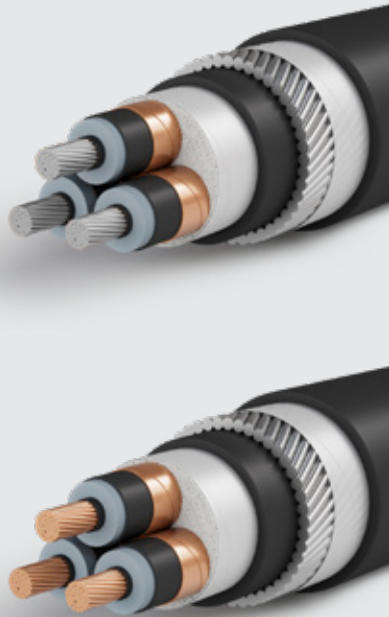

Maximum Operating Temp. 90° C

Minimum bending Radius 12 x outer diameter

Packing Condition Our standard length on Wooden Drum / or according to customer request

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Operating Capacitance	Inductance	Current Rating		Approx. Overall Diameter	Approx. Weight
		DC at 20 °C	AC at 90° C			Laid in Ground	Laid in Free Air		
					mm²	Ω/km	Ω/km	µF/km	mH/km
	A - Copper Conductors								
PM-CT14-X8-03-WP	50	0.3870	0.4958	0.1836	0.3904	209	221	57.5	5760
PM-CT15-X8-03-WP	70	0.2680	0.3436	0.2087	0.3671	256	274	61.6	6750
PM-CT16-X8-03-WP	95	0.1930	0.2480	0.2294	0.3501	303	328	65.2	7835
PM-CT17-X8-03-WP	120	0.1530	0.1972	0.2486	0.3353	344	376	70.1	9625
PM-CT18-X8-03-WP	150	0.1240	0.1604	0.2692	0.3256	383	425	73.8	10925
PM-CT19-X8-03-WP	185	0.0991	0.1291	0.2937	0.3143	430	481	78.1	12475
PM-CT20-X8-03-WP	240	0.0754	0.0996	0.3249	0.2998	492	559	83.0	14565
PM-CT21-X8-03-WP	300	0.0601	0.0810	0.3547	0.2906	550	633	88.2	16940
PM-CT22-X8-03-WP	400	0.0470	0.0656	0.3912	0.2823	614	714	95.1	20300
PM-CT23-X8-03-WP	500	0.0366	0.0540	0.4357	0.2730	681	806	102.8	24380
B - Aluminum Conductors									
PM-AT14-X8-03-WP	50	0.6410	0.8251	0.1892	0.3844	162	171	58.4	4985
PM-AT15-X8-03-WP	70	0.4430	0.5706	0.2101	0.3649	198	212	61.8	5520
PM-AT16-X8-03-WP	95	0.3200	0.4125	0.2322	0.3483	236	255	65.7	6200
PM-AT17-X8-03-WP	120	0.2530	0.3265	0.2500	0.3344	268	294	70.4	7510
PM-AT18-X8-03-WP	150	0.2060	0.2658	0.2733	0.3236	299	332	74.5	8365
PM-AT19-X8-03-WP	185	0.1640	0.2125	0.2978	0.3113	338	377	78.3	9175
PM-AT20-X8-03-WP	240	0.1250	0.1628	0.3249	0.2998	390	442	83.0	10195
PM-AT21-X8-03-WP	300	0.1000	0.1312	0.3547	0.2906	438	502	88.2	11390
PM-AT22-X8-03-WP	400	0.0778	0.1035	0.3912	0.2823	496	575	95.1	13190
PM-AT23-X8-03-WP	500	0.0605	0.0825	0.4357	0.2730	560	660	102.8	15195

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request