

Multicores Copper & Aluminum Conductors

XLPE Insulated and PVC Sheathed

Voltage Grade

12 / 20 (24) KV

Description


Soft annealed Stranded circular compacted Copper or Stranded circular compacted Aluminum conductor, semiconducting layer as conductor screen, XLPE insulated semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, three cores assembled together with non hygroscopic Polypropylene fillers, banded with suitable tape and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and binded with a Copper tape to achieve electrical contact Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Assembly	The insulated Cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Outer Sheath	Extruded PVC Compound
Cores Indentification	by inserting Red, Yellow, Blue narrow plastic tapes between the non metallic & the metallic insulation screen, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	12 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

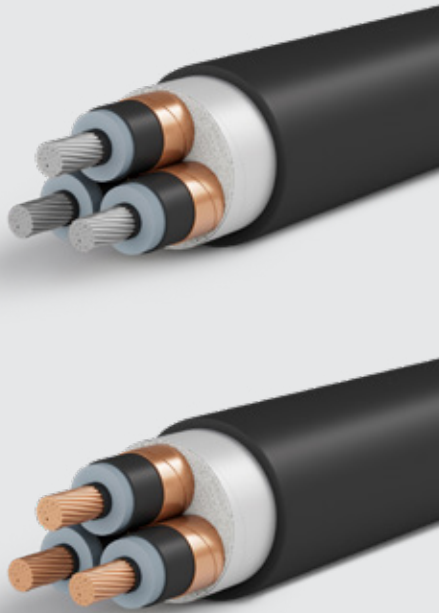

MEDIUM VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Operating Capacitance	Inductance	Current Rating			Approx. Overall Diameter	Approx. Weight
		DC at 20 °C	AC at 90° C			Laid in Ground	Laid in Duct	Laid in Free Air		
	mm²	Ω/km	Ω/km	µF/km	mH/km	A	A	A	mm	kg/km
A - Copper Conductors										
PM-CT14-X8-03-UP	50	0.3870	0.4957	0.1836	0.3904	208	175	223	50.7	3235
PM-CT15-X8-03-UP	70	0.2680	0.3434	0.2087	0.3671	256	215	278	54.8	4055
PM-CT16-X8-03-UP	95	0.1930	0.2476	0.2294	0.3501	304	258	333	58.2	4940
PM-CT17-X8-03-UP	120	0.1530	0.1968	0.2486	0.3353	344	295	379	61.4	5780
PM-CT18-X8-03-UP	150	0.1240	0.1598	0.2692	0.3256	386	333	430	65.3	6915
PM-CT19-X8-03-UP	185	0.0991	0.1284	0.2937	0.3143	434	379	488	69.4	8165
PM-CT20-X8-03-UP	240	0.0754	0.0986	0.3249	0.2998	501	443	573	74.1	9950
PM-CT21-X8-03-UP	300	0.0601	0.0796	0.3547	0.2906	563	499	652	79.1	11950
PM-CT22-X8-03-UP	400	0.0470	0.0638	0.3912	0.2823	641	563	740	85.8	10865
PM-CT23-X8-03-UP	500	0.0366	0.0516	0.4357	0.2730	717	642	843	93.1	18370
B - Aluminum Conductors										
PM-AT14-X8-03-UP	50	0.6410	0.8251	0.1892	0.3844	162	135	173	51.6	2420
PM-AT15-X8-03-UP	70	0.4430	0.5705	0.2101	0.3649	198	167	215	55.0	2825
PM-AT16-X8-03-UP	95	0.3200	0.4123	0.2322	0.3483	236	200	259	58.7	3265
PM-AT17-X8-03-UP	120	0.2530	0.3262	0.2500	0.3344	268	230	296	61.7	3660
PM-AT18-X8-03-UP	150	0.2060	0.2658	0.2733	0.3236	301	258	335	66.0	4290
PM-AT19-X8-03-UP	185	0.1640	0.2120	0.2978	0.3113	340	295	382	69.6	4860
PM-AT20-X8-03-UP	240	0.1250	0.1622	0.3249	0.2998	394	346	450	74.1	5580
PM-AT21-X8-03-UP	300	0.1000	0.1304	0.3547	0.2906	445	390	514	79.1	6400
PM-AT22-X8-03-UP	400	0.0778	0.1024	0.3912	0.2823	508	450	588	85.8	7750
PM-AT23-X8-03-UP	500	0.0605	0.0809	0.4357	0.2730	578	525	680	93.1	9190

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request
the below data are applicable for cables with rated voltage 12.7/22 (24) KV