

Multicores Copper & Aluminum Conductors

XLPE Insulated, Steel Tape armored and PVC Sheathed

Voltage Grade

18 / 30 (36) KV

Description


Soft annealed Stranded circular compacted Copper or Stranded circular compacted Aluminum conductor, semiconducting layer as conductor screen, XLPE insulated, semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, three cores assembled together with non hygroscopic Polypropylene fillers, banded with suitable tape armored with steel tape and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and binded with a Copper tape to achieve electrical contact Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Assembly	The insulated Cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Double Steel Tapes applied helically over the inner sheath.
Outer Sheath	Extruded PVC Compound
Cores Indentification	by inserting Red, Yellow, Blue narrow plastic tapes between the non metallic & the metallic insulation screen, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request

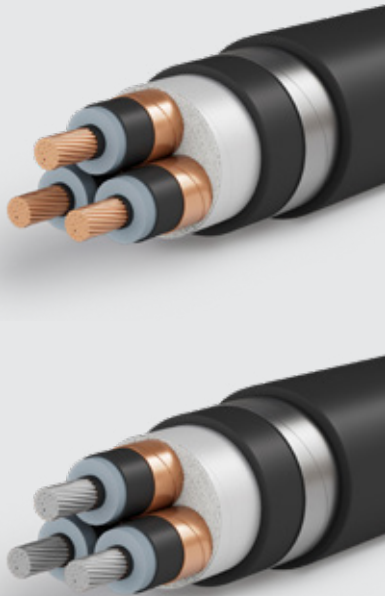

MEDIUM VOLTAGE CABLES

Maximum Operating Temp. 90° C

Minimum bending Radius 12 x outer diameter

Packing Condition Our standard length on Wooden Drum / or according to customer request

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Operating Capacitance	Inductance	Current Rating		Approx. Overall Diameter	Approx. Weight
						Laid in Ground	Laid in Free Air		
					DC at 20 °C	AC at 90° C			
	mm²	Ω/km	Ω/km	µF/km	mH/km	A	A	mm	kg/km
A - Copper Conductors									
PM-CT14-X9-03-TP	50	0.3870	0.4958	0.1436	0.4299	207	220	64.6	5415
PM-CT15-X9-03-TP	70	0.2680	0.3436	0.1615	0.4037	254	271	68.9	6375
PM-CT16-X9-03-TP	95	0.1930	0.2479	0.1762	0.3847	302	324	73.5	8030
PM-CT17-X9-03-TP	120	0.1530	0.1970	0.1898	0.3681	343	370	76.7	8955
PM-CT18-X9-03-TP	150	0.1240	0.1601	0.2042	0.3553	385	419	80.3	10170
PM-CT19-X9-03-TP	185	0.0991	0.1288	0.2215	0.3424	432	476	84.4	11570
PM-CT20-X9-03-TP	240	0.0754	0.0992	0.2434	0.3272	498	559	89.8	13720
PM-CT21-X9-03-TP	300	0.0601	0.0804	0.2643	0.3163	560	634	94.9	15880
PM-CT22-X9-03-TP	400	0.0470	0.0649	0.2898	0.3051	629	720	101.4	19270
PM-CT23-X9-03-TP	500	0.0366	0.0531	0.3209	0.2940	704	819	108.9	23035
B - Aluminum Conductors									
PM-AT14-X9-03-TP	50	0.6410	0.8252	0.1476	0.4232	161	171	65.5	4635
PM-AT15-X9-03-TP	70	0.4430	0.5705	0.1624	0.4014	197	211	69.1	5155
PM-AT16-X9-03-TP	95	0.3200	0.4124	0.1781	0.3826	235	253	73.9	6370
PM-AT17-X9-03-TP	120	0.2530	0.3264	0.1907	0.3672	268	289	76.9	6845
PM-AT18-X9-03-TP	150	0.2060	0.2661	0.2071	0.3530	299	326	81.0	7565
PM-AT19-X9-03-TP	185	0.1640	0.2123	0.2244	0.3404	339	372	85.1	8310
PM-AT20-X9-03-TP	240	0.1250	0.1625	0.2434	0.3272	392	438	89.8	9345
PM-AT21-X9-03-TP	300	0.1000	0.1309	0.2643	0.3163	442	499	94.9	10330
PM-AT22-X9-03-TP	400	0.0778	0.1030	0.2898	0.3051	503	574	101.4	12155
PM-AT23-X9-03-TP	500	0.0605	0.0819	0.3209	0.2940	572	662	108.9	13855

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request
Galvanzied Steel Tapes is available according to customer request
the below data are applicable for cables with rated voltage 19/33 (36) KV