

Multicores Copper & Aluminum Conductors

XLPE Insulated, Steel Wires armored and PVC Sheathed

Voltage Grade

18 / 30 (36) KV

Description


Soft annealed Stranded circular compacted Copper or Stranded circular compacted Aluminum conductor, semiconducting layer as conductor screen, XLPE insulated, semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, three cores assembled together with non hygroscopic Polypropylene fillers, banded with suitable tape armored with Galvanized steel wires, banded with suitable tape and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502 or BS 6622
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and binded with a Copper tape to achieve electrical contact Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Assembly	The insulated Cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Galvanized Steel Wires over the inner sheath.
Outer Sheath	Extruded PVC Compound
Cores Indentification	by inserting Red, Yellow, Blue narrow plastic tapes between the non metallic & the metallic insulation screen, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request

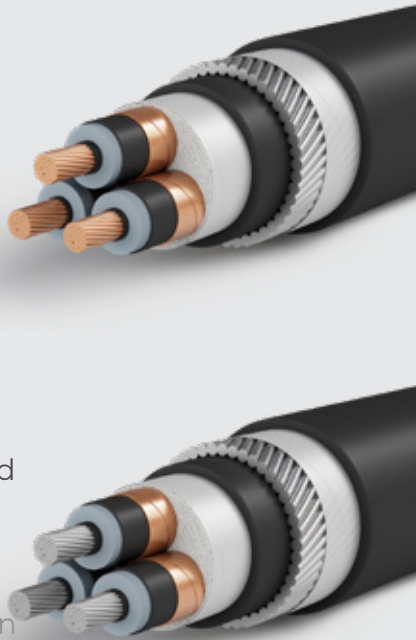

Maximum Operating Temp. 90° C

Minimum bending Radius 12 x outer diameter

Packing Condition Our standard length on Wooden Drum / or according to customer request

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Operating Capacitance	Inductance	Current Rating		Approx. Overall Diameter	Approx. Weight
						Laid in Ground	Laid in Free Air		
					mm²	Ω/km	Ω/km	µF/km	mH/km
	A - Copper Conductors								
PM-CT14-X9-03-WP	50	0.3870	0.4958	0.1436	0.4299	209	223	69.9	8000
PM-CT15-X9-03-WP	70	0.2680	0.3436	0.1615	0.4037	256	277	74.2	9150
PM-CT16-X9-03-WP	95	0.1930	0.2479	0.1762	0.3847	303	331	77.7	10335
PM-CT17-X9-03-WP	120	0.1530	0.1970	0.1898	0.3681	344	379	80.9	11310
PM-CT18-X9-03-WP	150	0.1240	0.1601	0.2042	0.3553	383	428	84.5	12695
PM-CT19-X9-03-WP	185	0.0991	0.1288	0.2215	0.3424	430	484	88.4	14150
PM-CT20-X9-03-WP	240	0.0754	0.0992	0.2434	0.3272	492	561	94.0	16530
PM-CT21-X9-03-WP	300	0.0601	0.0804	0.2643	0.3163	550	635	99.1	18885
PM-CT22-X9-03-WP	400	0.0470	0.0649	0.2898	0.3051	614	717	105.6	22455
PM-CT23-X9-03-WP	500	0.0366	0.0531	0.3209	0.2940	681	809	113.1	26480
B - Aluminum Conductors									
PM-AT14-X9-03-WP	50	0.6410	0.8252	0.1476	0.4232	163	174	70.8	7265
PM-AT15-X9-03-WP	70	0.4430	0.5705	0.1624	0.4014	198	215	74.4	7925
PM-AT16-X9-03-WP	95	0.3200	0.4124	0.1781	0.3826	236	259	78.1	8665
PM-AT17-X9-03-WP	120	0.2530	0.3264	0.1907	0.3672	268	296	81.1	9255
PM-AT18-X9-03-WP	150	0.2060	0.2661	0.2071	0.3530	299	334	85.2	10080
PM-AT19-X9-03-WP	185	0.1640	0.2123	0.2244	0.3404	338	380	89.1	10930
PM-AT20-X9-03-WP	240	0.1250	0.1625	0.2434	0.3272	390	443	94.0	12155
PM-AT21-X9-03-WP	300	0.1000	0.1309	0.2643	0.3163	438	503	99.1	13335
PM-AT22-X9-03-WP	400	0.0778	0.1030	0.2898	0.3051	496	576	105.6	15340
PM-AT23-X9-03-WP	500	0.0605	0.0819	0.3209	0.2940	560	661	113.1	17300

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request
the below data are applicable for cables with rated voltage 19/33 (36) KV