

Multicores Copper & Aluminum Conductors

XLPE Insulated and PVC Sheathed

Voltage Grade

18 / 30 (36) KV

Description


Soft annealed Stranded circular compacted Copper or Stranded circular compacted Aluminum conductor, semiconducting layer as conductor screen, XLPE insulated, semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, three cores assembled together with non hygrosopic Polypropylene fillers, banded with suitable tape and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and binded with a Copper tape to achieve electrical contact Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Assembly	The insulated Cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Outer Sheath	Extruded PVC Compound
Cores Indentification	by inserting Red, Yellow, Blue narrow plastic tapes between the non metallic & the metallic insulation screen, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	12 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

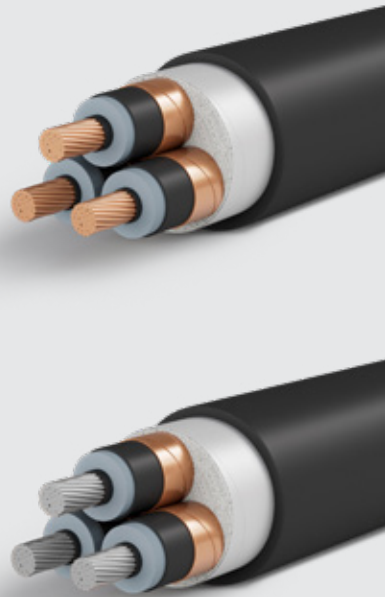

MEDIUM VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Operating Capacitance	Inductance	Current Rating			Approx. Overall Diameter	Approx. Weight
						Laid in Ground	Laid in Duct	Laid in Free Air		
	mm²	Ω/km	Ω/km	µF/km	mH/km	A	A	A	mm	kg/km
A - Copper Conductors										
PM-CT14-X9-03-UP	50	0.3870	0.4956	0.1436	0.4299	209	175	227	61.2	4155
PM-CT15-X9-03-UP	70	0.2680	0.3434	0.1615	0.4037	256	215	281	65.3	5005
PM-CT16-X9-03-UP	95	0.1930	0.2477	0.1762	0.3847	305	258	336	68.8	5990
PM-CT17-X9-03-UP	120	0.1530	0.1966	0.1898	0.3681	346	295	383	72.0	6830
PM-CT18-X9-03-UP	150	0.1240	0.1597	0.2042	0.3553	388	333	434	75.2	7870
PM-CT19-X9-03-UP	185	0.0991	0.1282	0.2215	0.3424	436	379	493	79.5	9205
PM-CT20-X9-03-UP	240	0.0754	0.0983	0.2434	0.3272	502	443	578	84.7	11160
PM-CT21-X9-03-UP	300	0.0601	0.0793	0.2643	0.3163	564	499	656	89.6	13135
PM-CT22-X9-03-UP	400	0.0470	0.0633	0.2898	0.3051	641	563	746	95.9	16310
PM-CT23-X9-03-UP	500	0.0366	0.0510	0.3209	0.2940	718	642	848	103.4	19875
B - Aluminum Conductors										
PM-AT14-X9-03-UP	50	0.6410	0.8251	0.1476	0.4232	162	135	177	62.1	3360
PM-AT15-X9-03-UP	70	0.4430	0.5704	0.1624	0.4014	199	167	218	65.5	3780
PM-AT16-X9-03-UP	95	0.3200	0.4122	0.1781	0.3826	237	200	262	69.2	4320
PM-AT17-X9-03-UP	120	0.2530	0.3261	0.1907	0.3672	270	230	299	72.2	4715
PM-AT18-X9-03-UP	150	0.2060	0.2657	0.2071	0.3530	302	258	338	75.9	5245
PM-AT19-X9-03-UP	185	0.1640	0.2119	0.2244	0.3404	341	295	386	80.2	5920
PM-AT20-X9-03-UP	240	0.1250	0.1620	0.2434	0.3272	394	346	454	84.7	6785
PM-AT21-X9-03-UP	300	0.1000	0.1301	0.2643	0.3163	445	390	516	89.6	7585
PM-AT22-X9-03-UP	400	0.0778	0.1021	0.2898	0.3051	508	450	594	95.9	9195
PM-AT23-X9-03-UP	500	0.0605	0.0806	0.3209	0.2940	578	525	686	103.4	10690

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request
the below data are applicable for cables with rated voltage 19/33 (36) KV