

Multicores Copper & Aluminum Conductors

XLPE Insulated, Steel Wires armored and PVC Sheathed

Voltage Grade

6 / 10 (12) KV

Description


Soft annealed Stranded circular compacted Copper or Stranded circular compacted Aluminum conductor, semiconducting layer as conductor screen, XLPE insulated, semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, three cores assembled together with non hygroscopic Polypropylene fillers, banded with suitable tape, armored with steel tape, armored with Galvanized steel wires, banded with suitable tape and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502 or BS 6622
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and binded with a Copper tape to achieve electrical contact Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Assembly	The insulated Cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Galvanized Steel Wires over the inner sheath.
Outer Sheath	Extruded PVC Compound
Cores Indentification	by inserting Red, Yellow, Blue narrow plastic tapes between the non metallic & the metallic insulation screen, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request

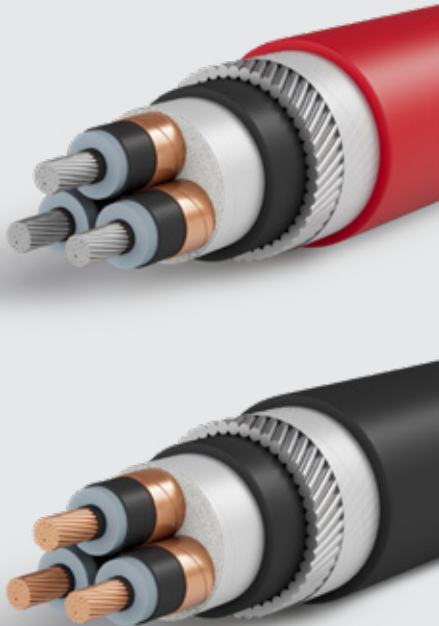

MEDIUM VOLTAGE CABLES

Maximum Operating Temp. 90° C

Minimum bending Radius 12 x outer diameter

Packing Condition Our standard length on Wooden Drum / or according to customer request

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Operating Capacitance	Inductance	Current Rating		Approx. Overall Diameter	Approx. Weight
		DC at 20 °C	AC at 90° C			Laid in Ground	Laid in Free Air		
					mm²	Ω/km	Ω/km	µF/km	mH/km
	A - Copper Conductors								
PM-CT14-X6-03-WP	50	0.3870	0.4957	0.2630	0.3507	208	215	48.7	4735
PM-CT15-X6-03-WP	70	0.2680	0.3438	0.3029	0.3287	256	268	52.3	5620
PM-CT16-X6-03-WP	95	0.1930	0.2482	0.3359	0.3143	304	323	55.8	6660
PM-CT17-X6-03-WP	120	0.1530	0.1974	0.3667	0.3015	344	369	59.0	7565
PM-CT18-X6-03-WP	150	0.1240	0.1607	0.3996	0.2941	386	419	63.3	8870
PM-CT19-X6-03-WP	185	0.0991	0.1296	0.4391	0.2849	432	475	67.4	10235
PM-CT20-X6-03-WP	240	0.0754	0.1002	0.4893	0.2740	496	555	74.0	13130
PM-CT21-X6-03-WP	300	0.0601	0.0818	0.5374	0.2652	552	629	78.8	15330
PM-CT22-X6-03-WP	400	0.0470	0.0665	0.5963	0.2591	617	711	85.6	18530
PM-CT23-X6-03-WP	500	0.0366	0.0551	0.6682	0.2517	682	800	93.3	22500
B - Aluminum Conductors									
PM-AT14-X6-03-WP	50	0.6410	0.8250	0.2719	0.3454	162	167	49.5	3960
PM-AT15-X6-03-WP	70	0.4430	0.5706	0.3051	0.3267	198	207	52.6	4390
PM-AT16-X6-03-WP	95	0.3200	0.4125	0.3403	0.3128	236	250	56.2	4980
PM-AT17-X6-03-WP	120	0.2530	0.3266	0.3689	0.3009	269	288	59.2	5480
PM-AT18-X6-03-WP	150	0.2060	0.2663	0.4062	0.2925	301	327	63.9	6270
PM-AT19-X6-03-WP	185	0.1640	0.2127	0.4456	0.2836	339	372	68.0	6980
PM-AT20-X6-03-WP	240	0.1250	0.1632	0.4893	0.2740	392	439	74.0	8755
PM-AT21-X6-03-WP	300	0.1000	0.1317	0.5374	0.2652	440	499	78.8	9780
PM-AT22-X6-03-WP	400	0.0778	0.1041	0.5963	0.2591	498	573	85.6	11420
PM-AT23-X6-03-WP	500	0.0605	0.0832	0.6682	0.2517	563	657	93.3	13330

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request
the below data are applicable for cables with rated voltage 6.35/11 (12) KV