

Multicores Copper & Aluminum Conductors

XLPE Insulated and PVC Sheathed

Voltage Grade

6 / 10 (12) KV

Description


Soft annealed Stranded circular compacted Copper or Stranded circular compacted Aluminum conductor, semiconducting layer as conductor screen, XLPE insulated, semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, three cores assembled together with non hygroscopic Polypropylene fillers, banded with suitable tape and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and binded with a Copper tape to achieve electrical contact Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Assembly	The insulated Cores are assembled together using nonhygroscopic polyprobylene filler (if needed), then banded with suitable tape
Outer Sheath	Extruded PVC Compound
Cores Indentification	by inserting Red, Yellow, Blue narrow plastic tapes between the non metallic & the metallic insulation screen, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	12 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

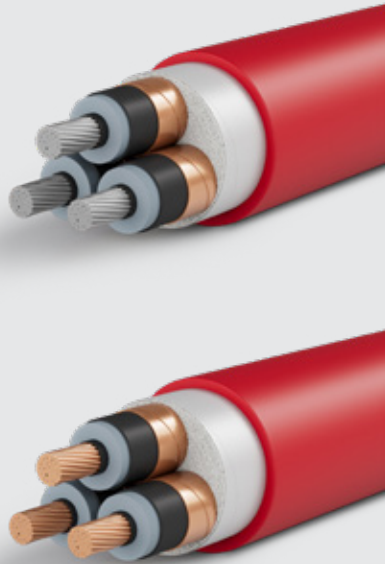

MEDIUM VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Operating Capacitance	Inductance	Current Rating			Approx. Overall Diameter	Approx. Weight
		DC at 20 °C	AC at 90° C			Laid in Ground	Laid in Duct	Laid in Free Air		
	mm²	Ω/km	Ω/km	µF/km	mH/km	A	A	A	mm	kg/km
A - Copper Conductors										
PM-CT14-X6-03-UP	50	0.3870	0.4955	0.2630	0.3507	207	166	217	42.1	2655
PM-CT15-X6-03-UP	70	0.2680	0.3435	0.3029	0.3287	254	205	270	45.5	3345
PM-CT16-X6-03-UP	95	0.1930	0.2478	0.3359	0.3143	304	247	326	49.0	4215
PM-CT17-X6-03-UP	120	0.1530	0.1968	0.3667	0.3015	345	281	373	52.2	4995
PM-CT18-X6-03-UP	150	0.1240	0.1601	0.3996	0.2941	386	320	423	56.3	6060
PM-CT19-X6-03-UP	185	0.0991	0.1287	0.4391	0.2849	434	365	482	60.2	7220
PM-CT20-X6-03-UP	240	0.0754	0.0990	0.4893	0.2740	500	428	564	65.3	9020
PM-CT21-X6-03-UP	300	0.0601	0.0801	0.5374	0.2652	559	484	641	70.1	10955
PM-CT22-X6-03-UP	400	0.0470	0.0644	0.5963	0.2591	634	558	734	76.5	13680
PM-CT23-X6-03-UP	500	0.0366	0.0524	0.6682	0.2517	708	637	834	84.0	17130
B - Aluminum Conductors										
PM-AT14-X6-03-UP	50	0.6410	0.8249	0.2719	0.3454	162	130	168	42.9	1840
PM-AT15-X6-03-UP	70	0.4430	0.5704	0.3051	0.3267	197	162	209	45.8	2115
PM-AT16-X6-03-UP	95	0.3200	0.4123	0.3403	0.3128	236	194	253	49.4	2535
PM-AT17-X6-03-UP	120	0.2530	0.3262	0.3689	0.3009	269	222	291	52.4	2870
PM-AT18-X6-03-UP	150	0.2060	0.2659	0.4062	0.2925	301	252	331	56.9	3420
PM-AT19-X6-03-UP	185	0.1640	0.2122	0.4456	0.2836	340	288	377	60.8	3925
PM-AT20-X6-03-UP	240	0.1250	0.1624	0.4893	0.2740	393	334	443	65.3	4645
PM-AT21-X6-03-UP	300	0.1000	0.1307	0.5374	0.2652	443	380	506	70.1	5405
PM-AT22-X6-03-UP	400	0.0778	0.1027	0.5963	0.2591	508	444	588	76.5	6565
PM-AT23-X6-03-UP	500	0.0605	0.0814	0.6682	0.2517	578	520	680	84.0	7950

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request
the below data are applicable for cables with rated voltage 6.35/11 (12) KV