

Single core Copper & Aluminum Conductors

XLPE Insulated, Aluminum Wire armored and PVC Sheathed

Voltage Grade

6 / 10 (12) KV

Description



Soft annealed Stranded circular compacted Copper or Stranded circular compacted Aluminum conductor, semiconducting layer as conductor screen, XLPE insulated semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, armored with aluminum wire and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502 or BS 6622
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and banded with a Copper tape to achieve electrical contact • Overlapped Copper Tape then Copper Wires are also available (in single core only) Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Inner Sheath	Extruded PVC Compound
Armoring	Aluminum Wires applied over the inner sheath.
Outer Sheath	Extruded PVC Compound
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	12 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

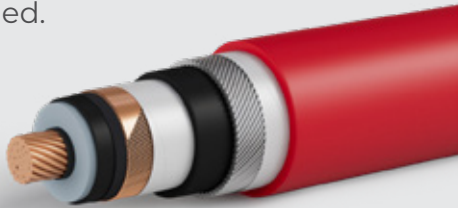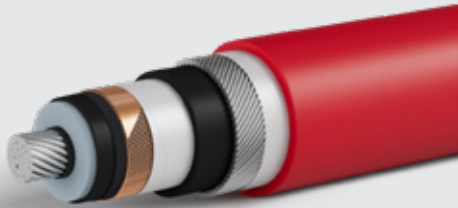

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance			Operating Capacitance	Inductance		Current Rating				Approx. Overall Diameter	Approx. Weight
		DC at 20 °C	AC at 90° C			Flat	Trefoil	Laid in Ground		Laid in Free Air			
			Flat	Trefoil				Flat	Trefoil	Flat Touched	Trefoil		
mm²	Ω/km	Ω/km	Ω/km	μF/km	mH/km	mH/km	A	A	A	A	mm	kg/km	
A - Copper Conductors													
PM-CT14-X6-01-RP	50	0.3870	0.4937	0.4937	0.2630	0.4915	0.4453	228	220	241	236	28.1	1280
PM-CT15-X6-01-RP	70	0.2680	0.3420	0.3421	0.3029	0.4644	0.4181	275	268	301	295	29.9	1530
PM-CT16-X6-01-RP	95	0.1930	0.2466	0.2466	0.3359	0.4446	0.3984	323	318	364	358	31.4	1810
PM-CT17-X6-01-RP	120	0.1530	0.1957	0.1958	0.3667	0.4310	0.3848	360	358	417	412	33.4	2125
PM-CT18-X6-01-RP	150	0.1240	0.1588	0.1590	0.3996	0.4186	0.3724	394	398	471	468	35.1	2535
PM-CT19-X6-01-RP	185	0.0991	0.1274	0.1276	0.4391	0.4048	0.3586	443	445	536	530	36.9	2920
PM-CT20-X6-01-RP	240	0.0754	0.0974	0.0977	0.4893	0.3896	0.3434	501	503	627	623	39.4	3530
PM-CT21-X6-01-RP	300	0.0601	0.0783	0.0787	0.5374	0.3787	0.3325	545	556	708	689	41.8	4180
PM-CT22-X6-01-RP	400	0.0470	0.0621	0.0627	0.5963	0.3727	0.3265	592	614	804	768	45.9	5315
PM-CT23-X6-01-RP	500	0.0366	0.0496	0.0504	0.6682	0.3600	0.3138	646	675	909	851	49.2	6445
PM-CT24-X6-01-RP	630	0.0283	0.0398	0.0408	0.7574	0.3520	0.3058	691	735	964	990	53.7	7890
PM-CT25-X6-01-RP	800	0.0221	0.0328	0.0340	0.8532	0.3419	0.2956	743	785	1057	1093	58.5	9835
B - Aluminum Conductors													
PM-AT14-X6-01-RP	50	0.6410	0.8219	0.8219	0.2719	0.4846	0.4384	180	171	185	184	28.5	1010
PM-AT15-X6-01-RP	70	0.4430	0.5682	0.5682	0.3051	0.4620	0.4158	218	209	232	232	30.0	1125
PM-AT16-X6-01-RP	95	0.3200	0.4106	0.4106	0.3403	0.4424	0.3962	258	249	281	278	31.6	1250
PM-AT17-X6-01-RP	120	0.2530	0.3248	0.3248	0.3689	0.4301	0.3838	289	282	324	324	33.5	1430
PM-AT18-X6-01-RP	150	0.2060	0.2646	0.2646	0.4062	0.4162	0.3699	320	313	366	366	35.4	1660
PM-AT19-X6-01-RP	185	0.1640	0.2109	0.2110	0.4456	0.4027	0.3565	357	353	422	424	37.2	1830
PM-AT20-X6-01-RP	240	0.1250	0.1611	0.1613	0.4893	0.3896	0.3434	402	404	506	498	39.4	2075
PM-AT21-X6-01-RP	300	0.1000	0.1292	0.1295	0.5374	0.3787	0.3325	442	450	574	561	41.8	2335
PM-AT22-X6-01-RP	400	0.0778	0.1011	0.1014	0.5963	0.3727	0.3265	489	505	661	639	45.9	2950
PM-AT23-X6-01-RP	500	0.0605	0.0795	0.0799	0.6682	0.3600	0.3138	539	565	760	722	49.2	3390
PM-AT24-X6-01-RP	630	0.0469	0.0625	0.0632	0.7596	0.3517	0.3055	600	623	833	840	53.8	4025
PM-AT25-X6-01-RP	800	0.0367	0.0502	0.0511	0.8532	0.3419	0.2956	663	689	936	953	58.5	4765

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request
the below data are applicable for cables with rated voltage 6.35/11 (12) KV