

Multicores Copper & Aluminum Conductors

XLPE Insulated and PVC Sheathed

Voltage Grade

8.7 / 15 (17.5) KV

Description


Soft annealed Stranded circular compacted Copper or Stranded circular compacted Aluminum conductor, semiconducting layer as conductor screen, XLPE insulated, semiconducting layer as non metallic insulation screen, Copper tape or wire as metallic insulation screen, three cores assembled together with non hygrosopic Polypropylene fillers, banded with suitable tape and PVC sheathed.

Application

These cables are generally suitable for direct burial or for installation on trays or in ducts.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2 or Aluminum conductor class 2
Conductor Screen	Extruded Semiconductive Compound
Insulation	Extruded XLPE Compound Rated 90° C
Insulation Screen	Non Metallic part: Extruded Semiconductive Compound (Bonded or Strippable) to the insulation Metallic part: (by one of the following) • Copper tape is applied helically with a suitable overlap. • Copper Wires helically applied and binded with a Copper tape to achieve electrical contact Conductor screen, XLPE insulation and non metallic insulation screen are applied at the same time using triple head extruder.
Assembly	The insulated Cores are assembled together using nonhygrosopic polypropylene filler (if needed), then banded with suitable tape
Outer Sheath	Extruded PVC Compound
Cores Indentification	by inserting Red, Yellow, Blue narrow plastic tapes between the non metallic & the metallic insulation screen, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	12 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

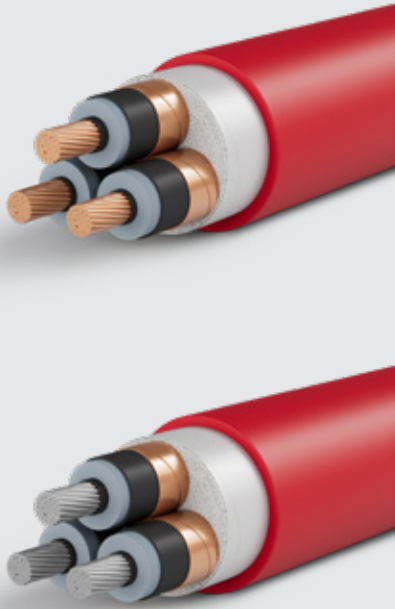

MEDIUM VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Operating Capacitance	Inductance	Current Rating			Approx. Overall Diameter	Approx. Weight
						Laid in Ground	Laid in Duct	Laid in Free Air		
	mm²	Ω/km	Ω/km	µF/km	mH/km	A	A	A	mm	kg/km
A - Copper Conductors										
PM-CT14-X7-03-UP	50	0.3870	0.4956	0.2141	0.3705	208	170	220	46.2	2910
PM-CT15-X7-03-UP	70	0.2680	0.3435	0.2448	0.3488	256	210	275	50.3	3700
PM-CT16-X7-03-UP	95	0.1930	0.2477	0.2702	0.3330	304	252	330	53.7	4505
PM-CT17-X7-03-UP	120	0.1530	0.1968	0.2938	0.3191	345	289	377	56.9	5315
PM-CT18-X7-03-UP	150	0.1240	0.1599	0.3191	0.3105	385	325	427	60.6	6440
PM-CT19-X7-03-UP	185	0.0991	0.1285	0.3492	0.3002	434	371	486	64.7	7650
PM-CT20-X7-03-UP	240	0.0754	0.0988	0.3877	0.2866	500	434	567	69.6	9465
PM-CT21-X7-03-UP	300	0.0601	0.0799	0.4245	0.2783	561	498	645	74.6	11440
PM-CT22-X7-03-UP	400	0.0470	0.0641	0.4695	0.2710	634	568	739	81.2	14270
PM-CT23-X7-03-UP	500	0.0366	0.0520	0.5244	0.2626	708	648	839	88.8	17795
B - Aluminum Conductors										
PM-AT14-X7-03-UP	50	0.6410	0.8251	0.2209	0.3648	162	132	170	47.0	2085
PM-AT15-X7-03-UP	70	0.4430	0.5704	0.2465	0.3467	198	163	212	50.5	2470
PM-AT16-X7-03-UP	95	0.3200	0.4123	0.2736	0.3313	236	196	257	54.1	2825
PM-AT17-X7-03-UP	120	0.2530	0.3262	0.2955	0.3184	269	224	294	57.1	3195
PM-AT18-X7-03-UP	150	0.2060	0.2658	0.3241	0.3086	301	253	333	61.2	3815
PM-AT19-X7-03-UP	185	0.1640	0.2121	0.3543	0.2986	340	289	380	65.3	4360
PM-AT20-X7-03-UP	240	0.1250	0.1623	0.3877	0.2866	393	339	446	69.6	5090
PM-AT21-X7-03-UP	300	0.1000	0.1305	0.4245	0.2783	445	387	511	74.6	5890
PM-AT22-X7-03-UP	400	0.0778	0.1025	0.4695	0.2710	508	448	590	81.2	7155
PM-AT23-X7-03-UP	500	0.0605	0.0812	0.5244	0.2626	578	526	683	88.8	8610

The above data is approximate and subject to manufacturing tolerances

Note:-

Flame retardant PVC sheathed or Polyethylene Sheathed are available according to customer request
Longitudinal or radial Water tightness layers are also available according to customer request