



— DSMC — Half-range reconstruction, S_{HR} DSMC 95% CI


ISO, $Kn=0.1$

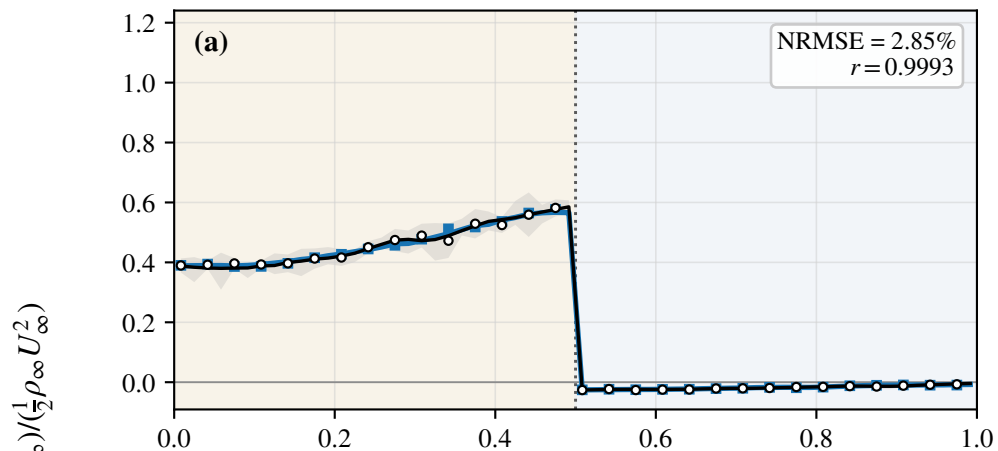


BWD, $Kn=0.2$

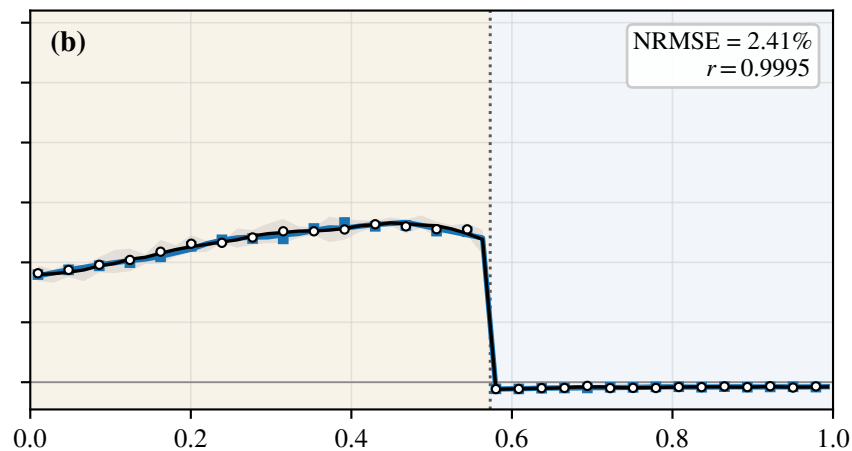


FWD, $Kn=0.2$

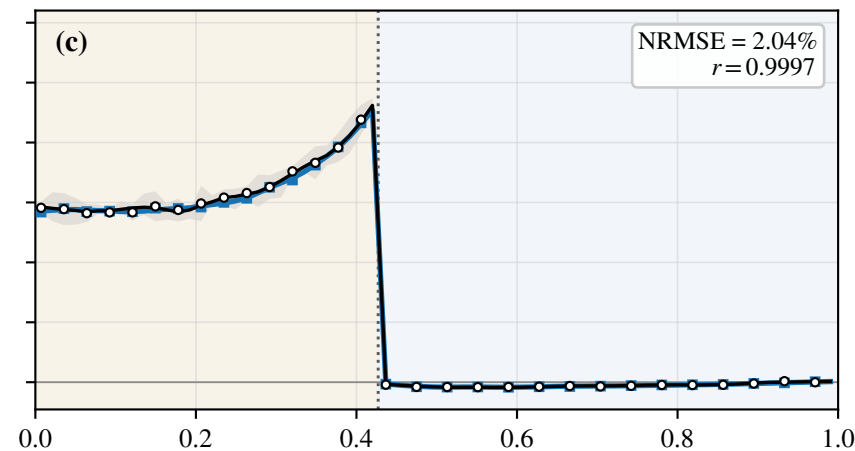


ISO, $Kn=0.8$

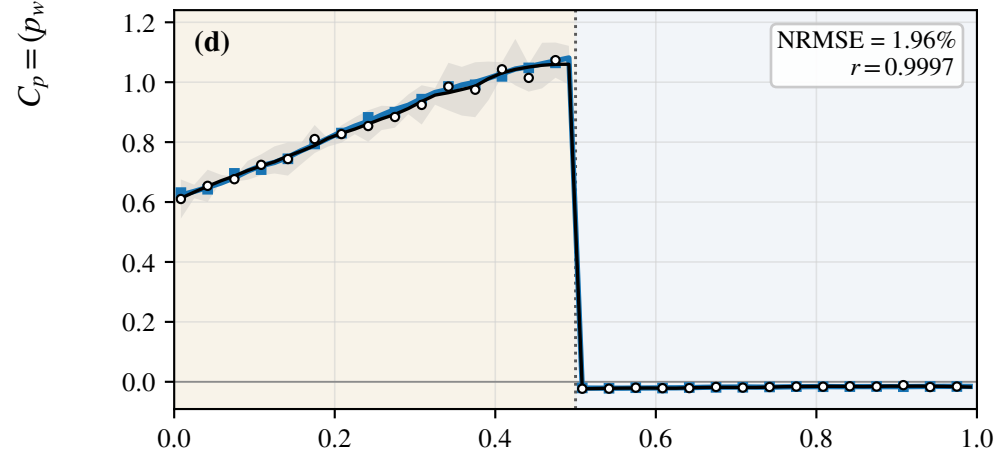

BWD, $Kn=0.4$

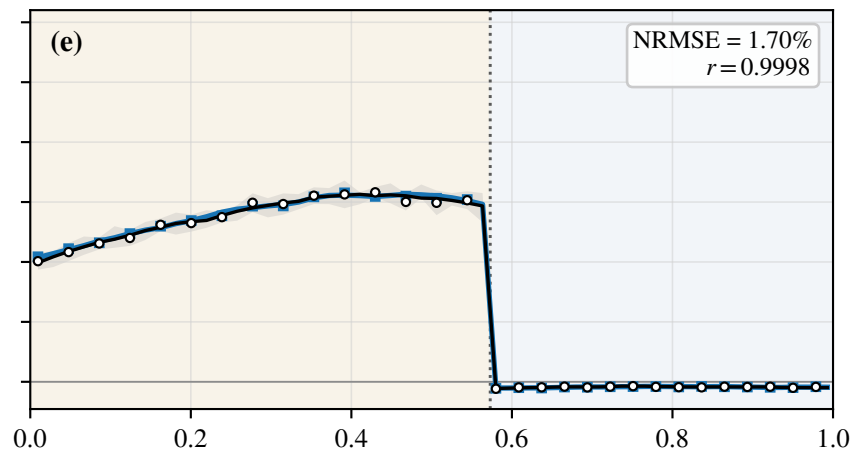

FWD, $Kn=0.4$

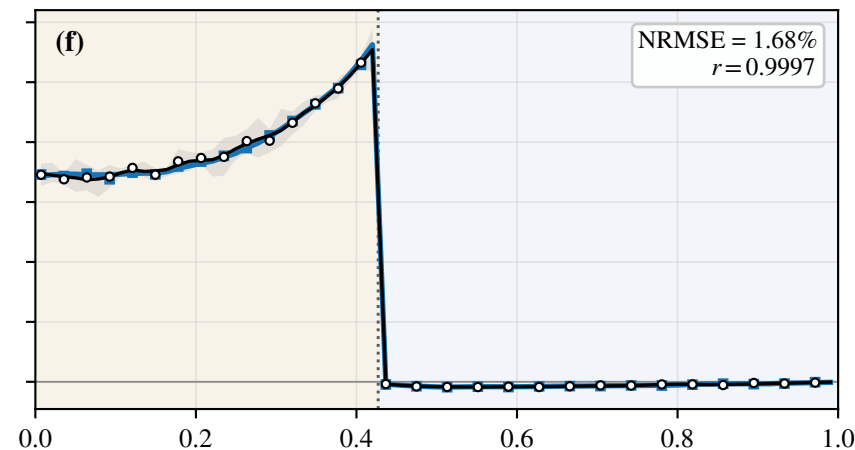

$$C_p = (p_w - p_\infty) / (\frac{1}{2} \rho_\infty U_\infty^2)$$

Physical wall arclength, s/L_w

independent 40,000-step DSMC reference

Markers: raw binned values; lines: facewise display smoothing; metrics use unsmoothed data