



HSIO functions are defined by the BIOS source code.
Cannot be changed in BIOS settings.


The functions are defined as follows:



- HSIO0: USB3.2 10Gbps
- HSIO1: PCIe 3.0 x1 M.2
- HSIO2: PCIe 3.0 x1 M.2
- HSIO3: PCIe 3.0 x1 M.2
- HSIO8: PCIe 3.0 x1 M.2
- HSIO9: PCIe 3.0 x1 M.2
- HSIO10: PCIe 3.0 x1 M.2
- HSIO11: PCIe 3.0 x4 (x1)
- HSIO6: PCIe 3.0 x4 (x1)

DDI/TCP functions are defined by the BIOS source code.
Cannot be changed in BIOS settings.




The functions are defined as follows:













- DDIA: eDP 1.4b (the 40Pin connector on the Mu)
- DDIB: HDMI 2.0
- TCP0: HDMI 2.0

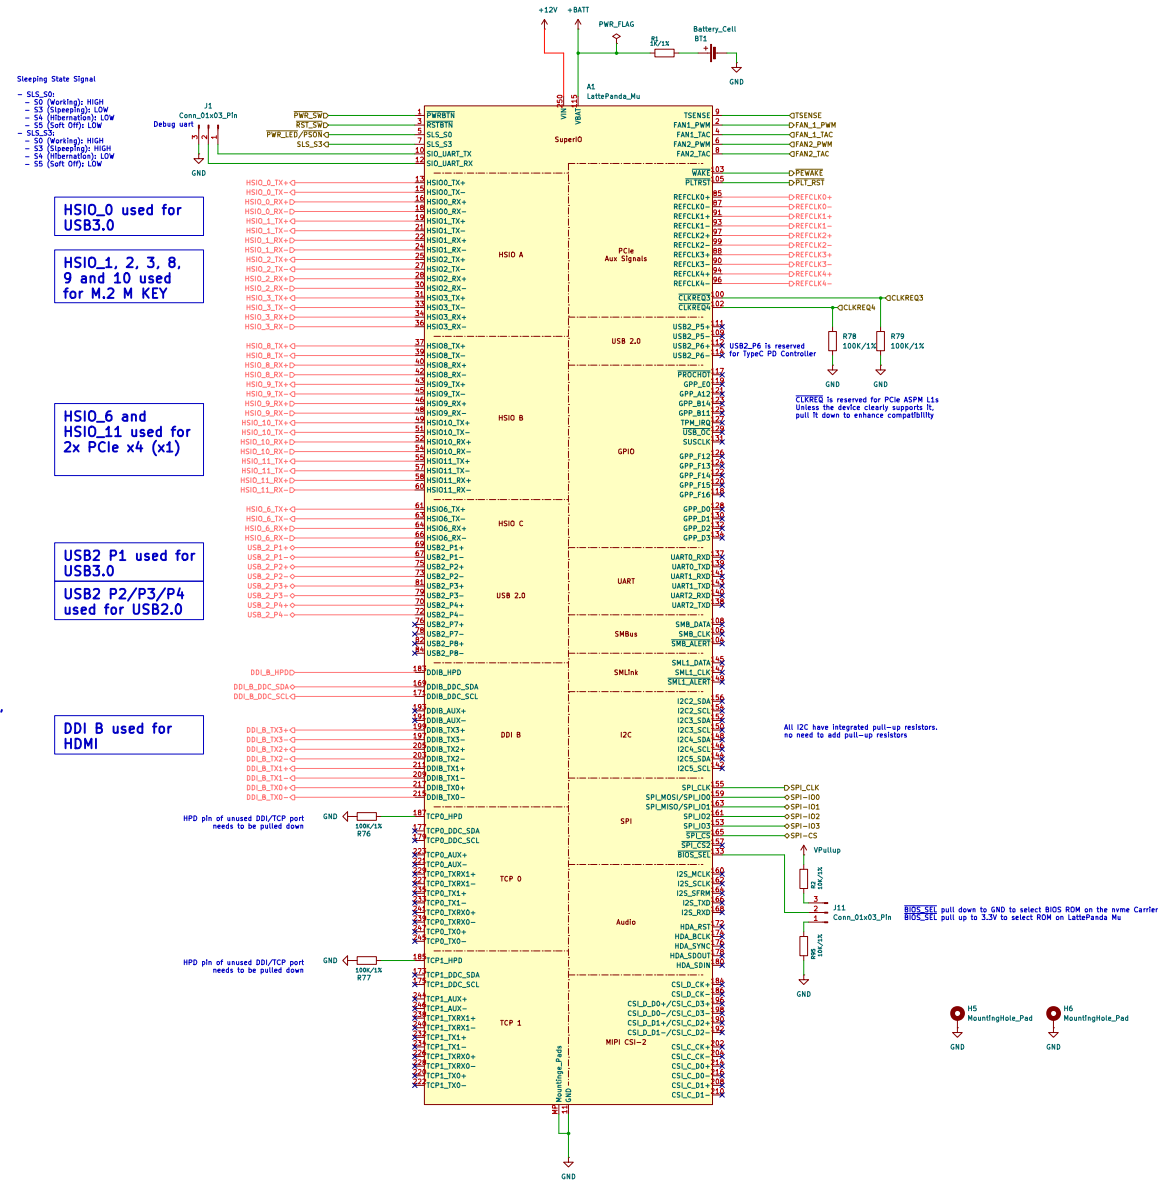

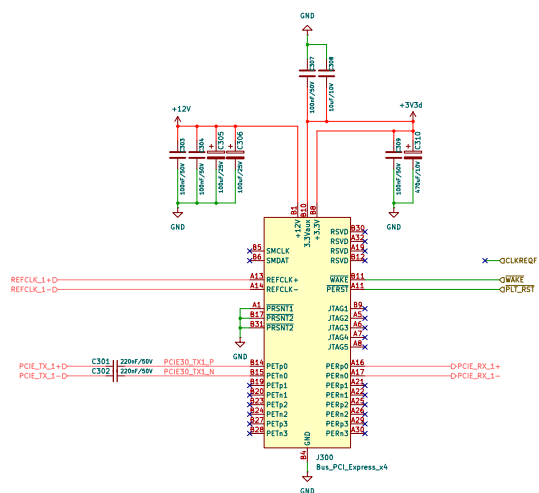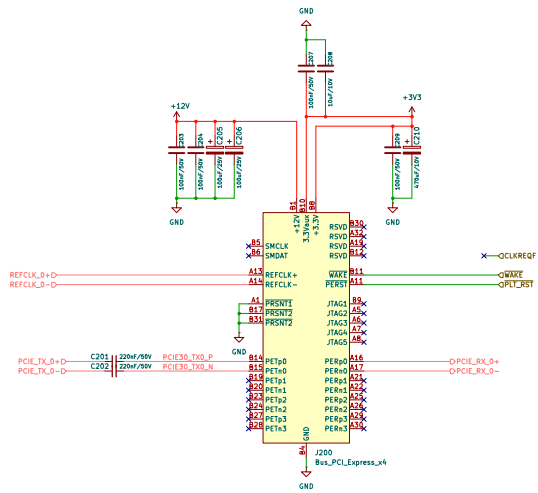




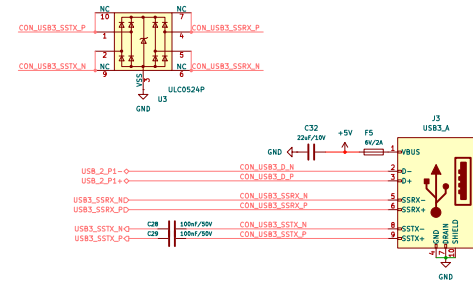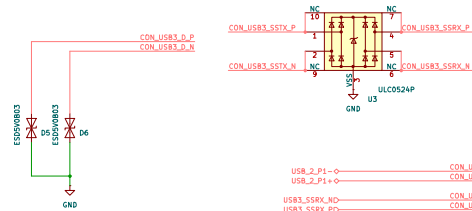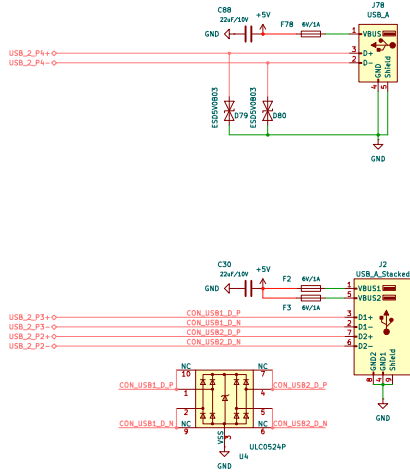

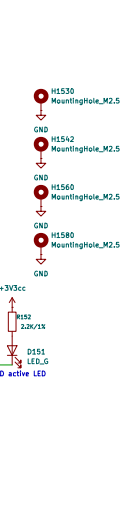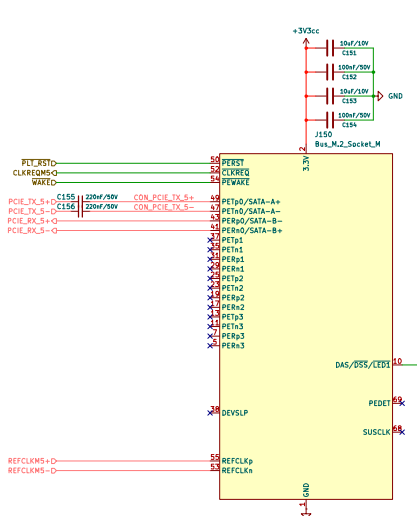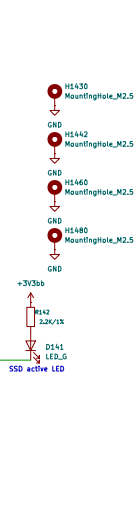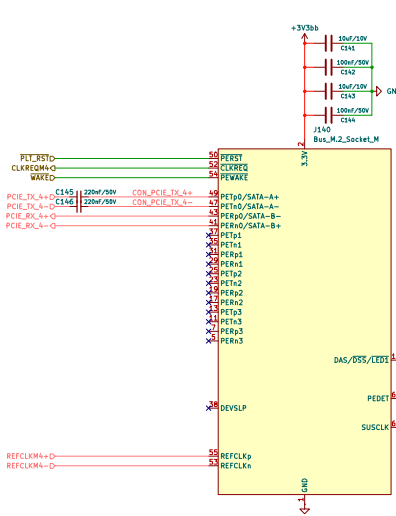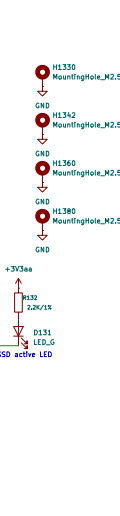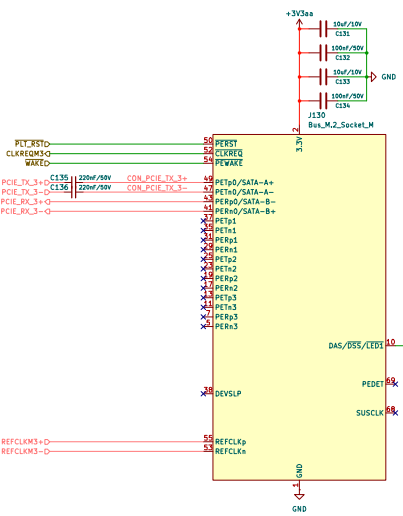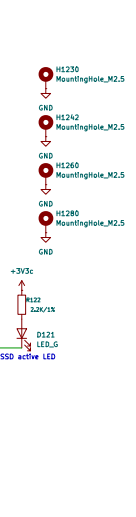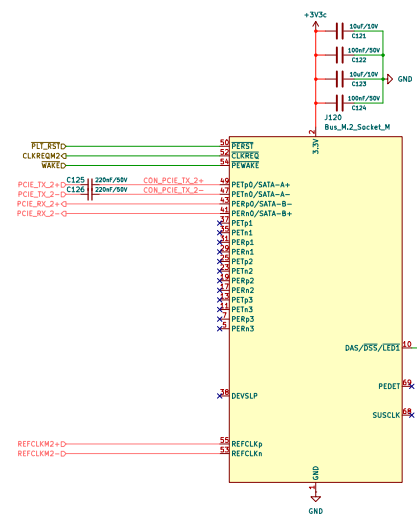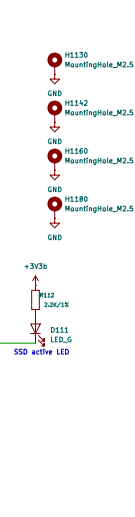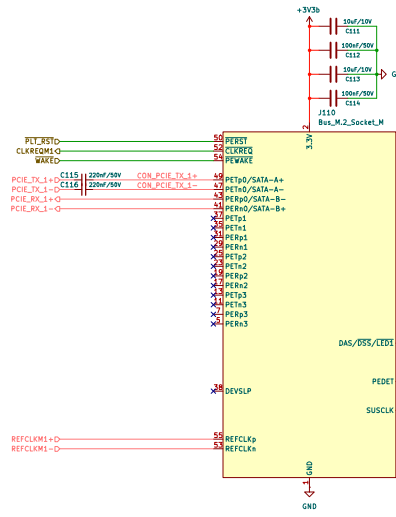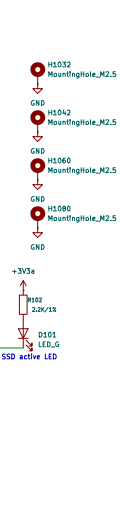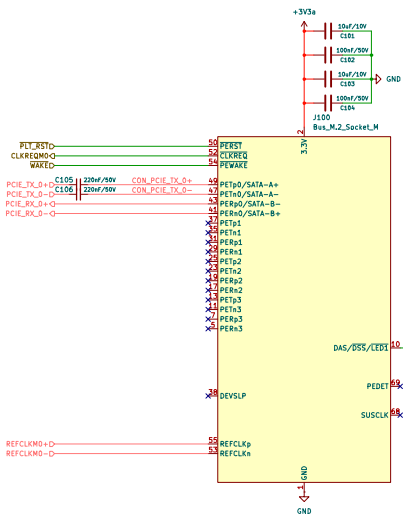





12V DC Input(12V 6A-10A)

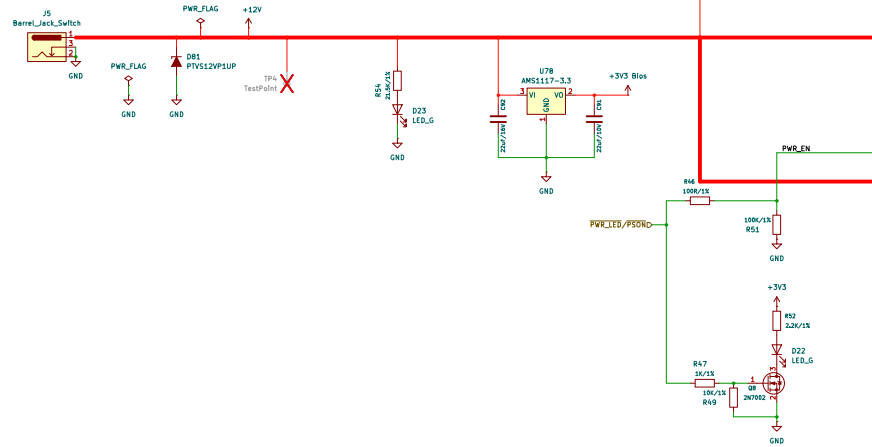



Pullup power for bios_sel

SY8253ADC 23V 3A 500kHz

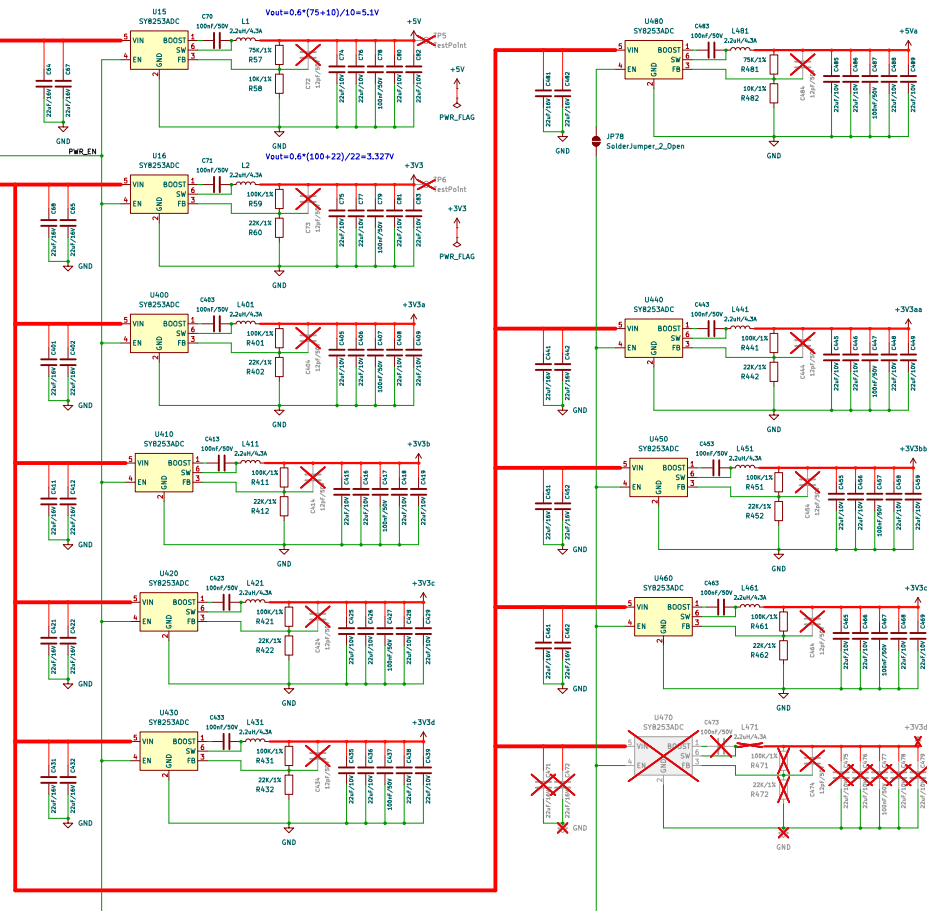

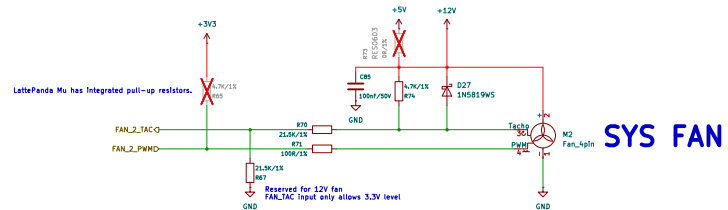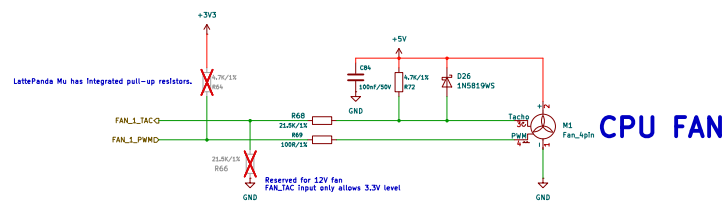

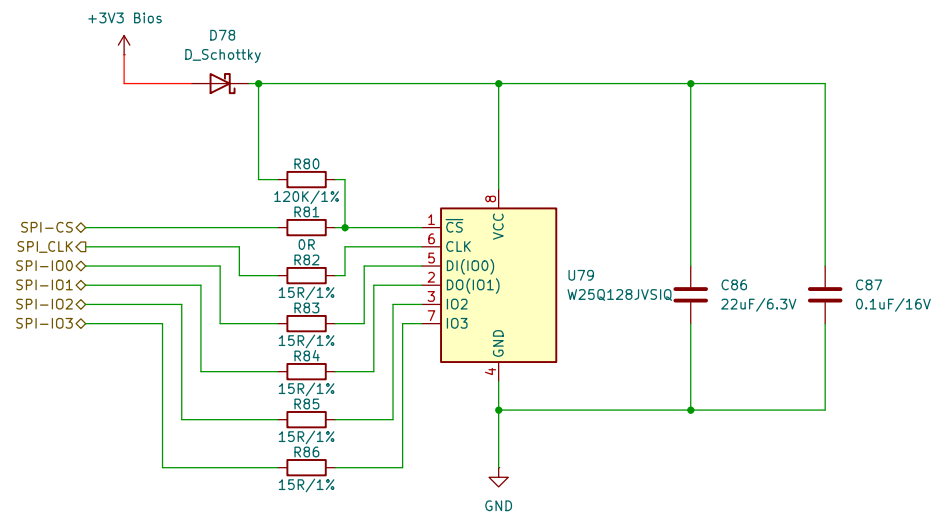

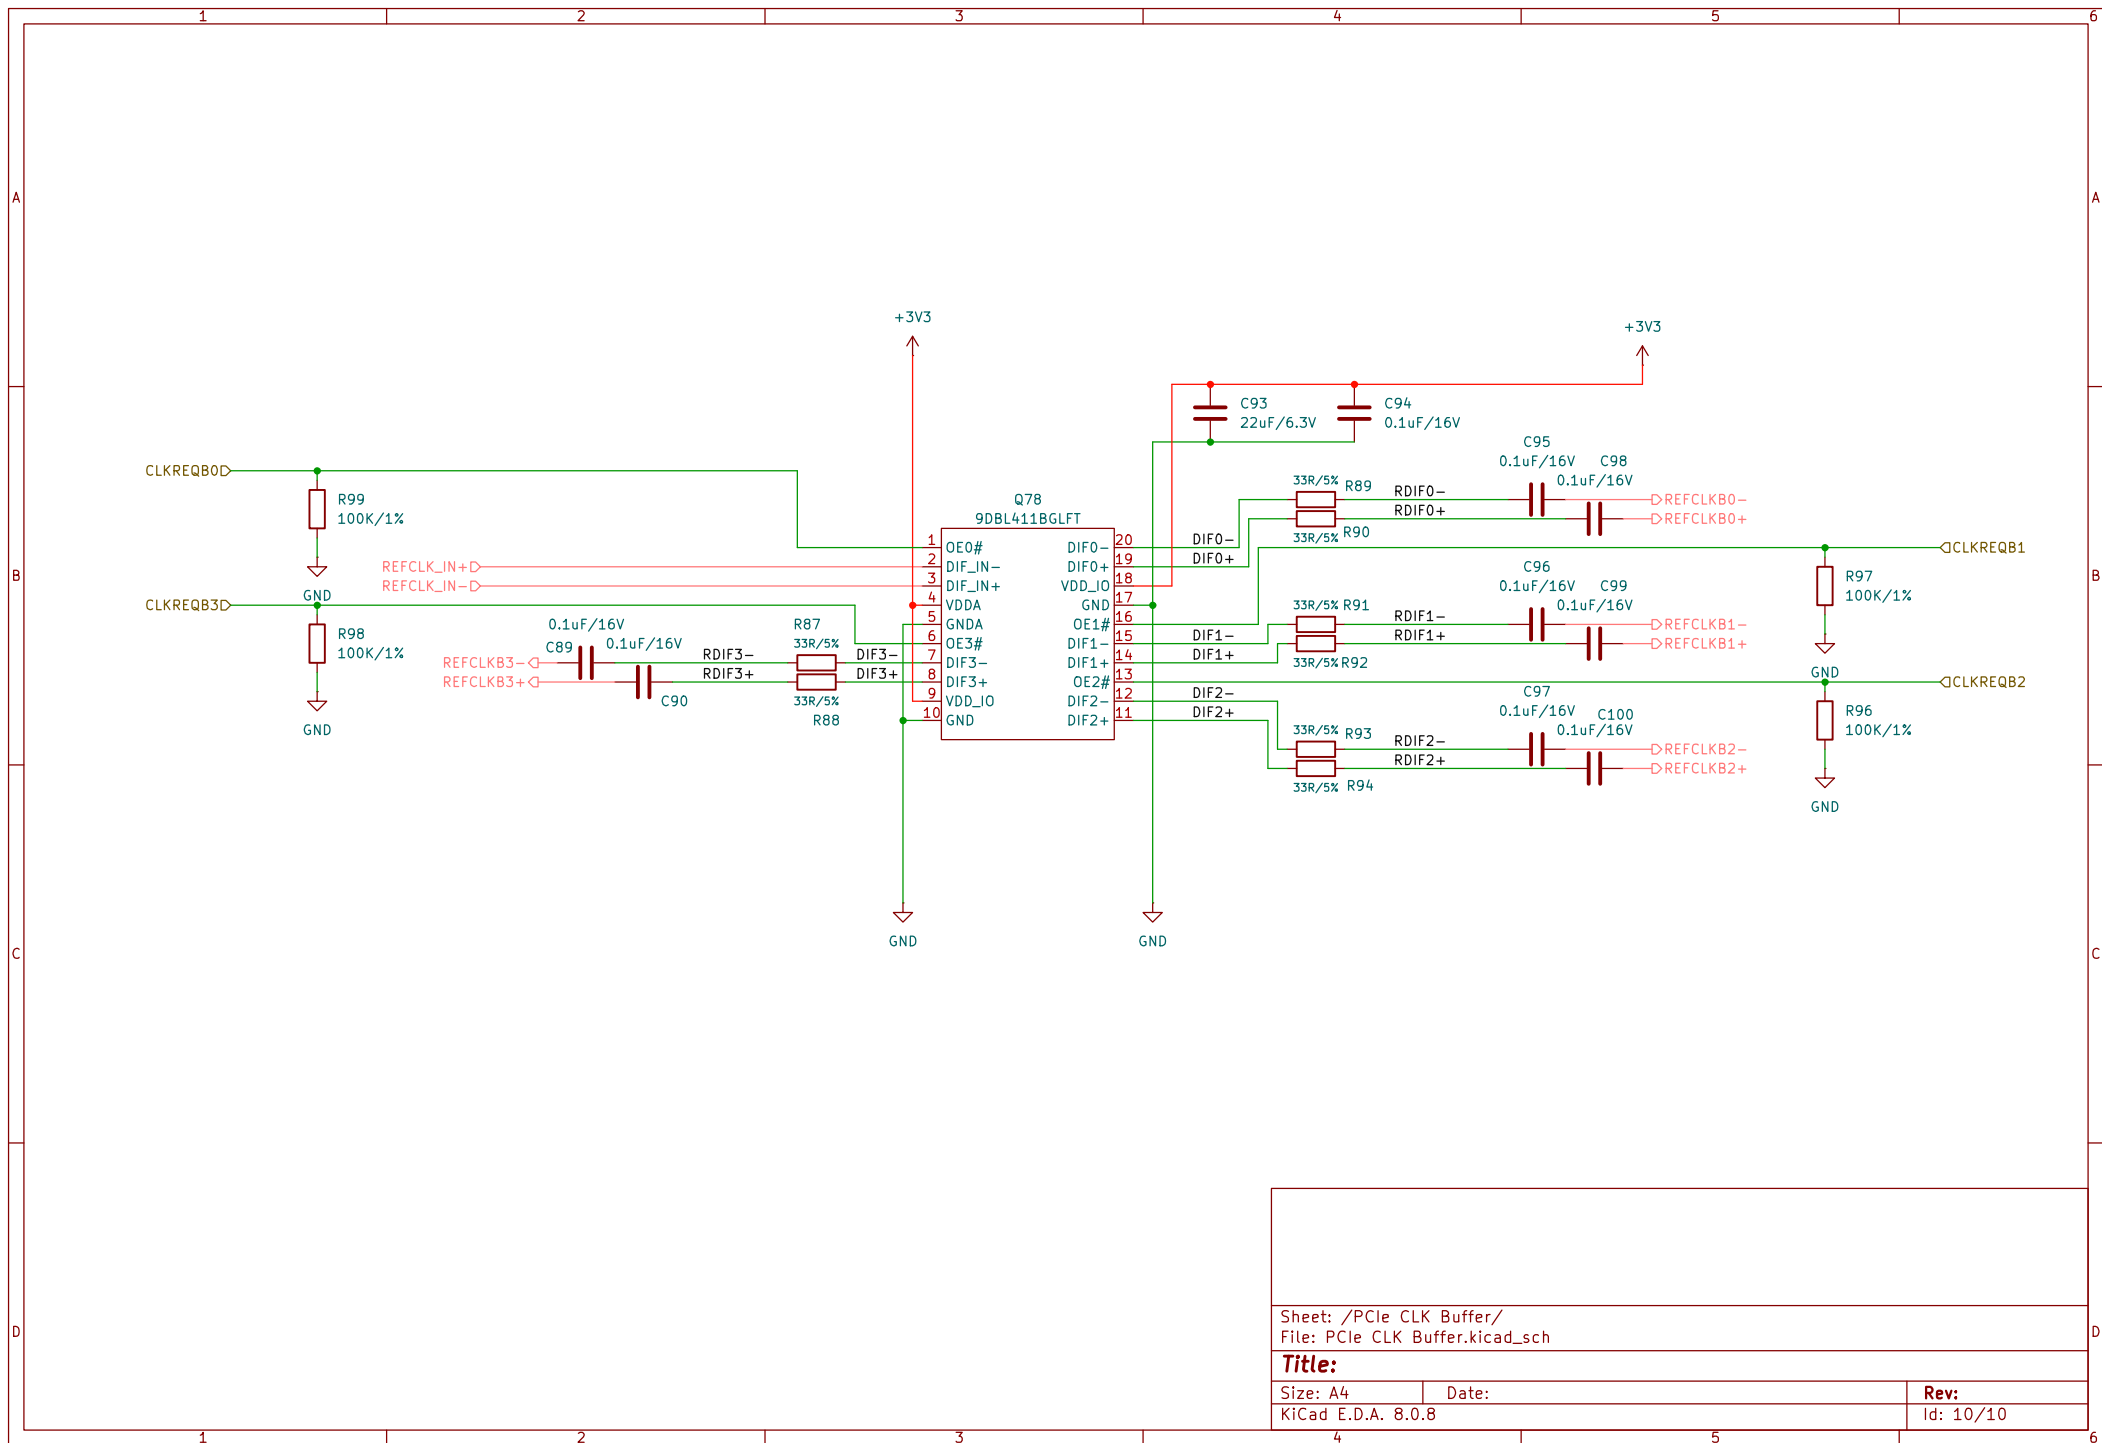

Sheet: /PCIe CLK Buffer/
File: PCIe CLK Buffer.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 8.0.8

Rev:

Id: 10/10