

How to check connectivity two system communicate sharing resource data end to end in background process


Step:1 Power on the Win1 & Win2 system

Go to Start – Run – ncpa.cpl — (Nic properties)


Assign the ip address



WinPC 1 name: Sys1 ip : 50.0.0.10


WinPC 2 name: Sys2 ip : 50.0.0.20

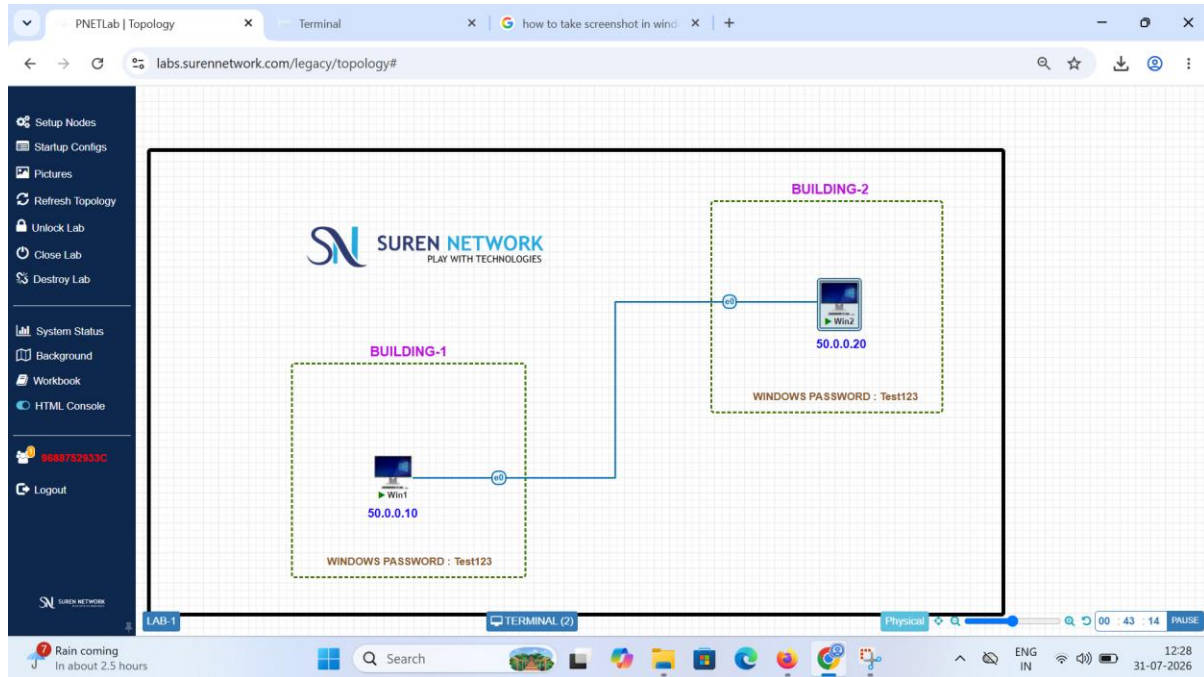

Step:2

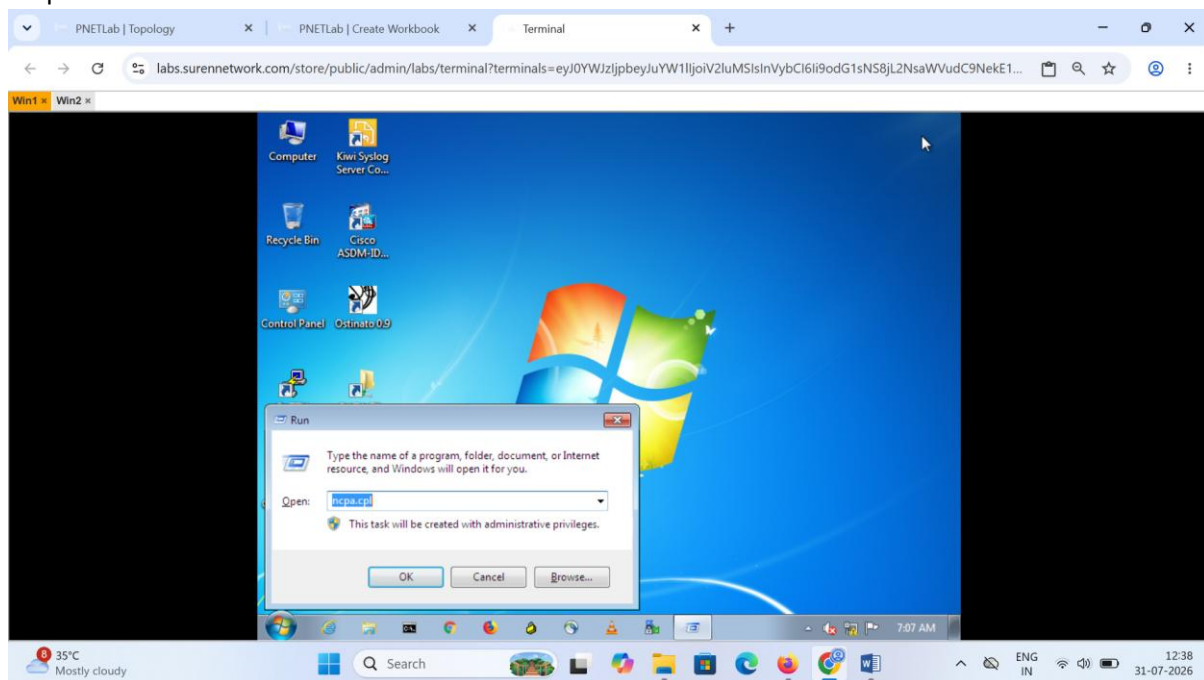

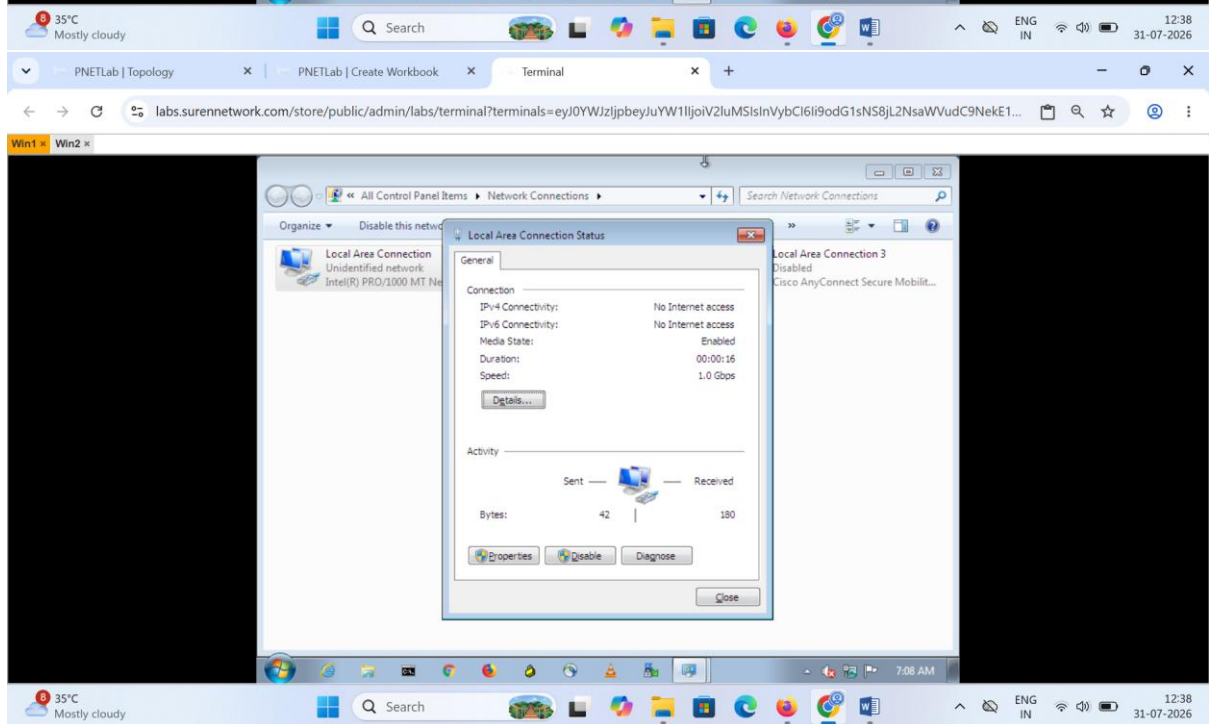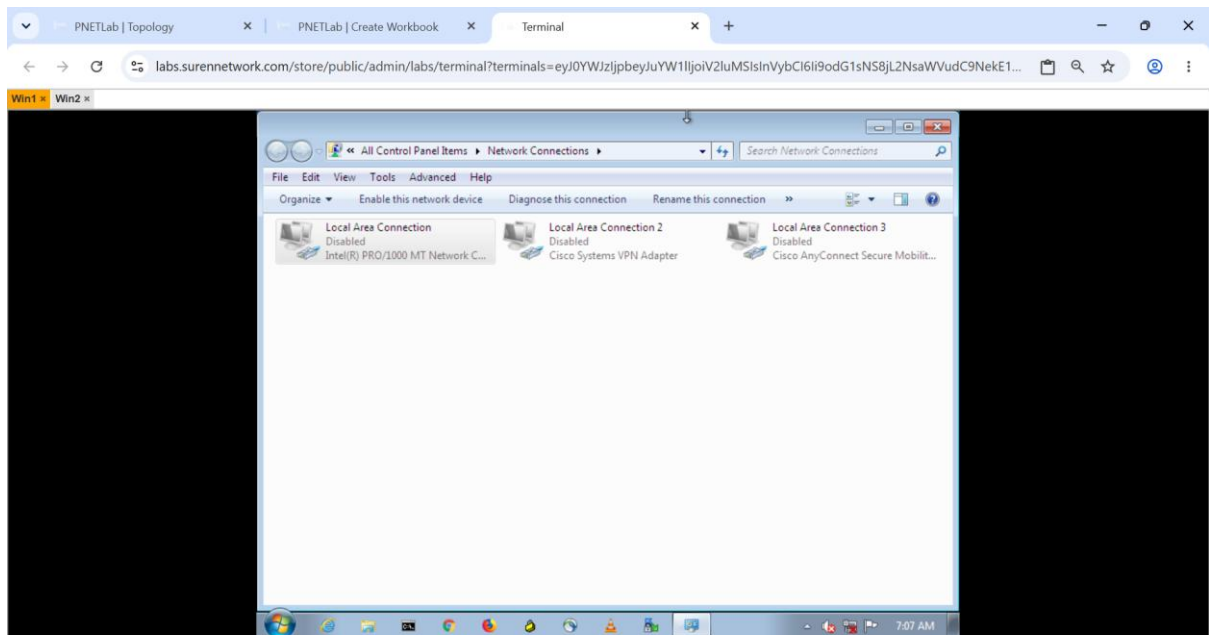

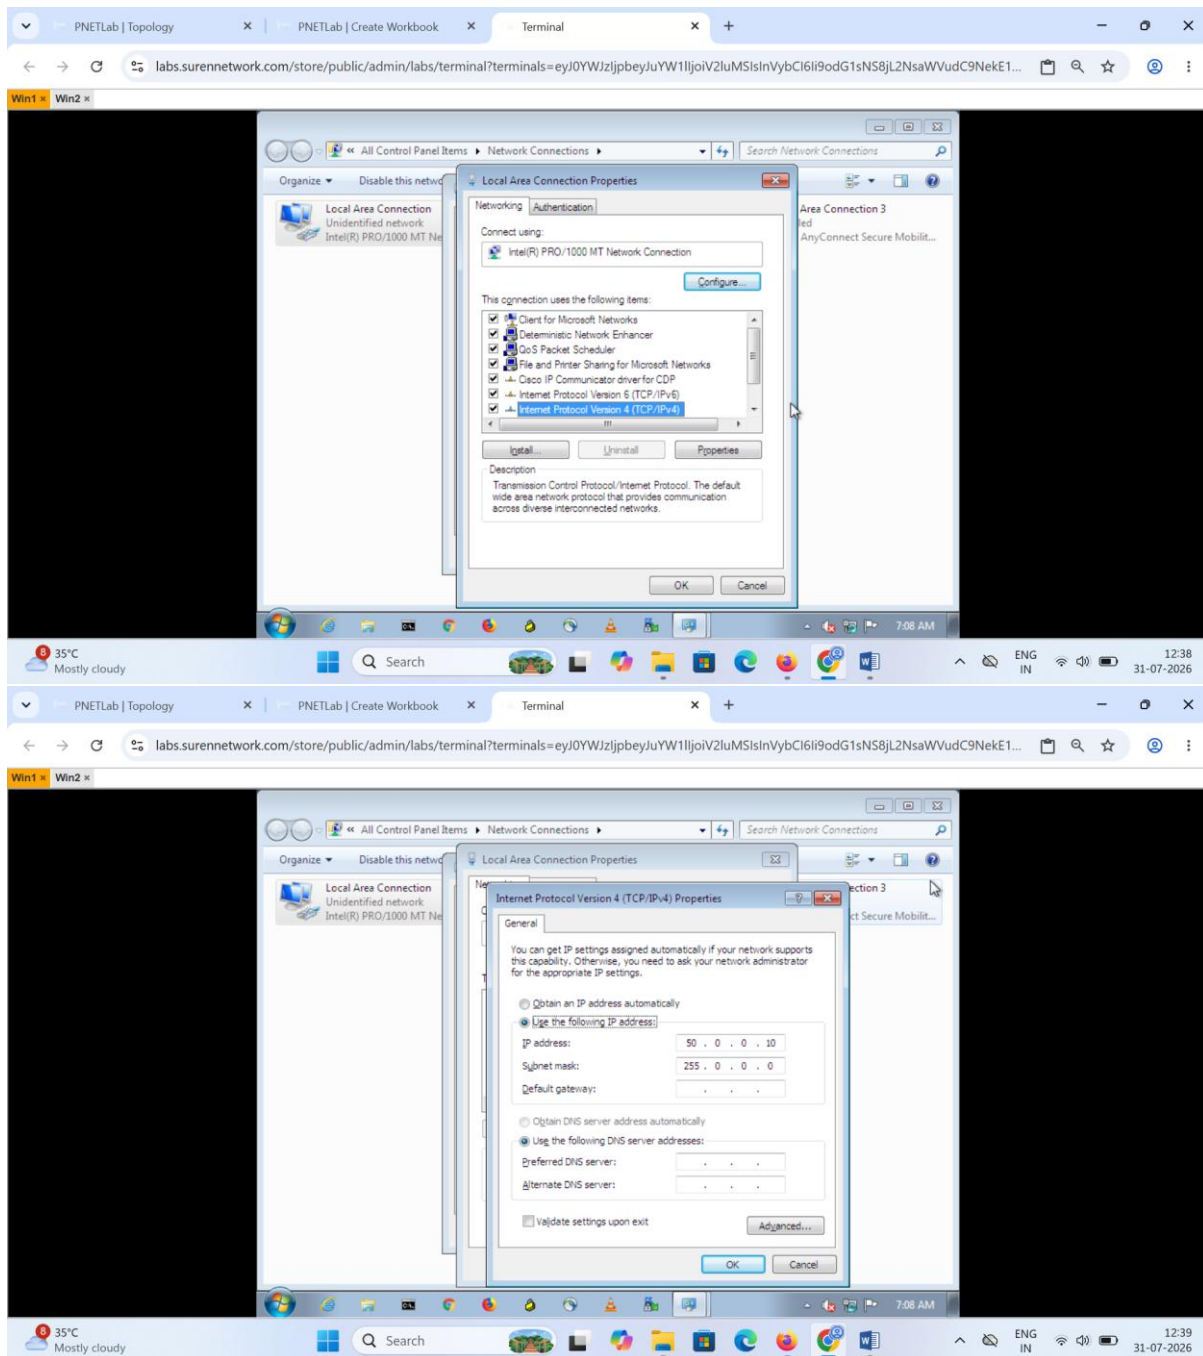


Step:2

Once assigned ip check its taken or not by using **ipconfig()** command in cmd


How to Use It



- Open the Command Prompt by typing cmd in the Windows search bar.
 - Type ipconfig and press Enter to see your basic network details.
- Common Commands
- **ipconfig**: Shows basic details like your IPv4 address, subnet mask, and default gateway.
 - **ipconfig /all**: Shows full details including your physical MAC address, DNS servers, and DHCP status.
 - **ipconfig /release**: Drops your current IP address so your computer disconnects from the network temporarily.
 - **ipconfig /renew**: Asks your router for a new IP address.


- **ipconfig /flushdns**: Clears out your computer's DNS cache to help fix website loading errors.

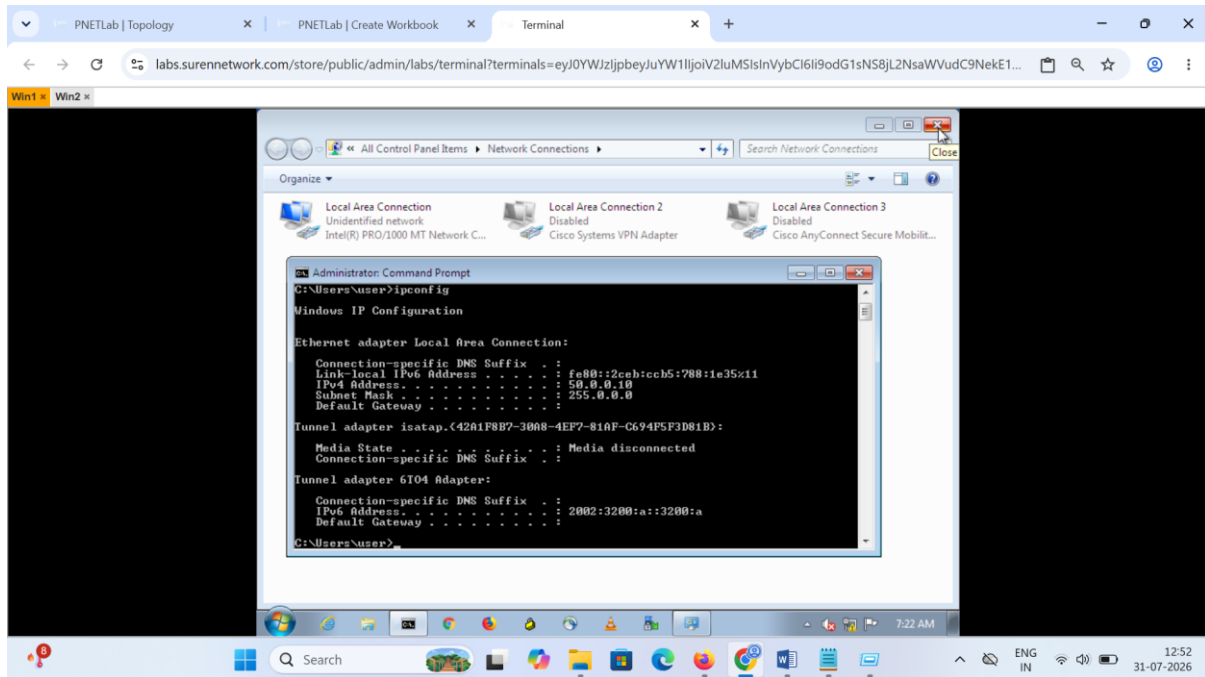


Assign WinPC2 ip:50.0.0.20 process

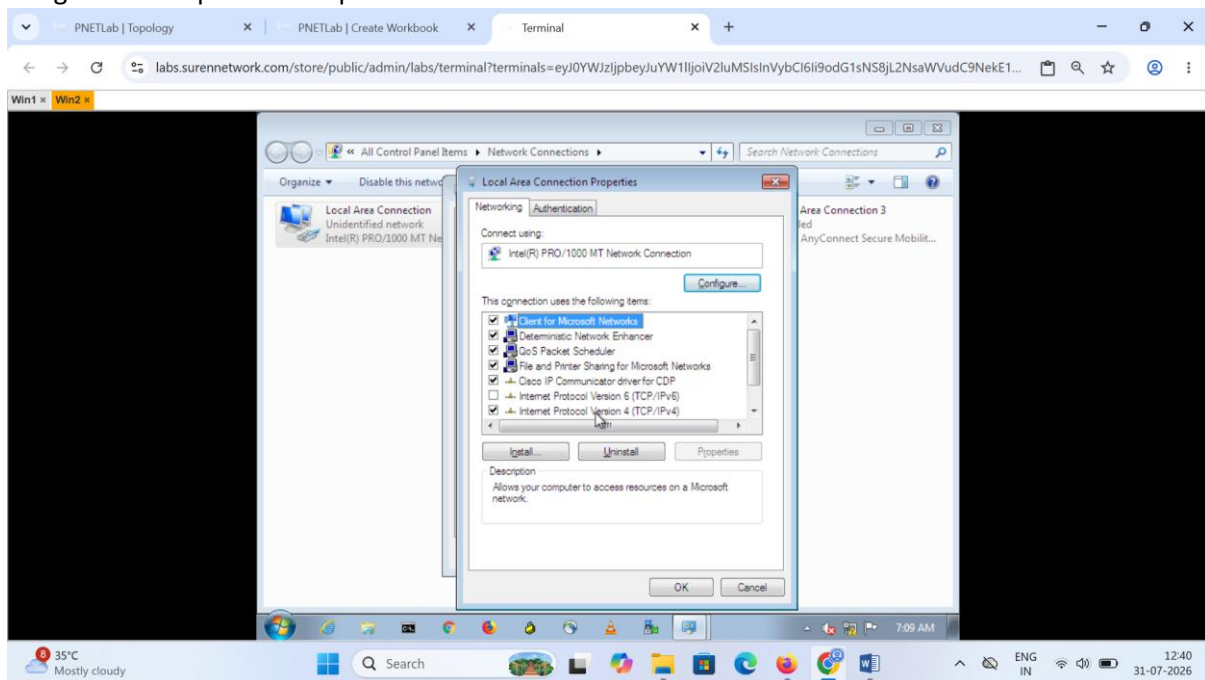

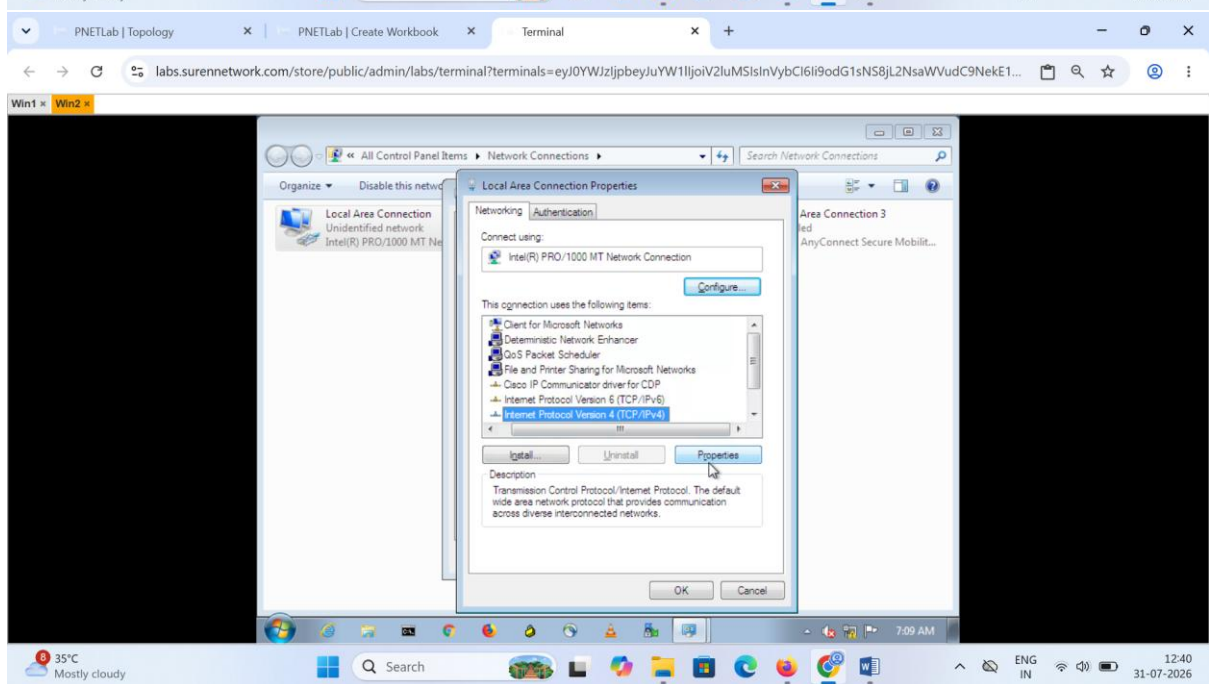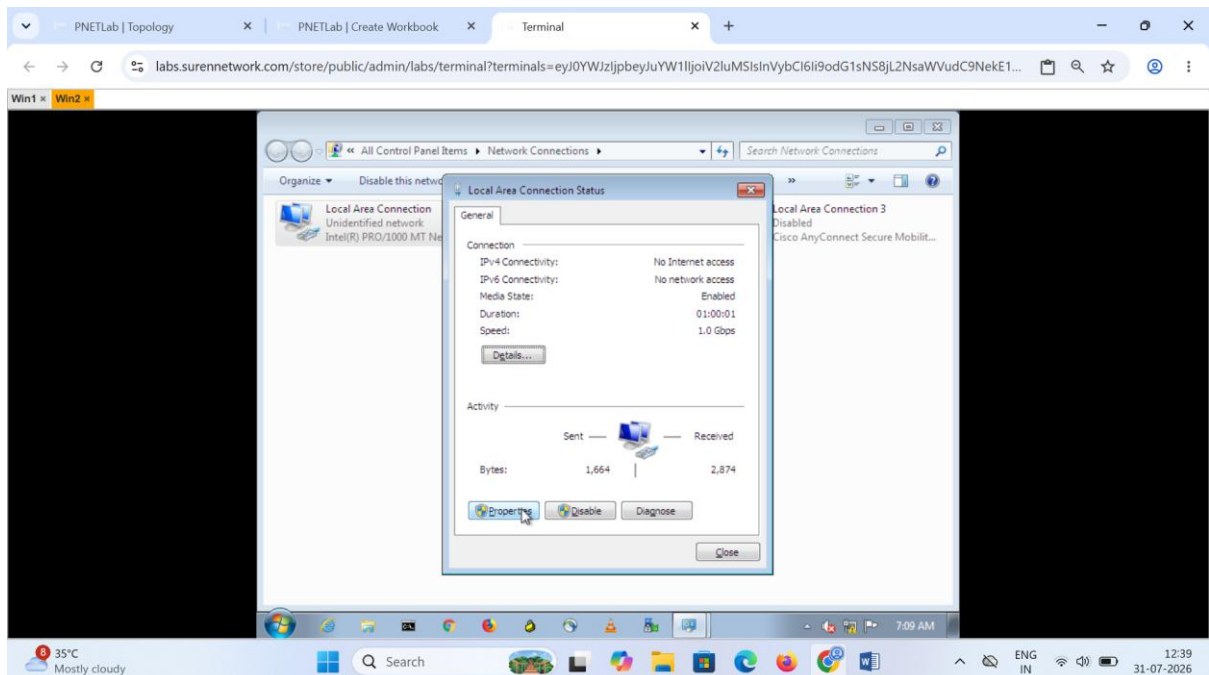

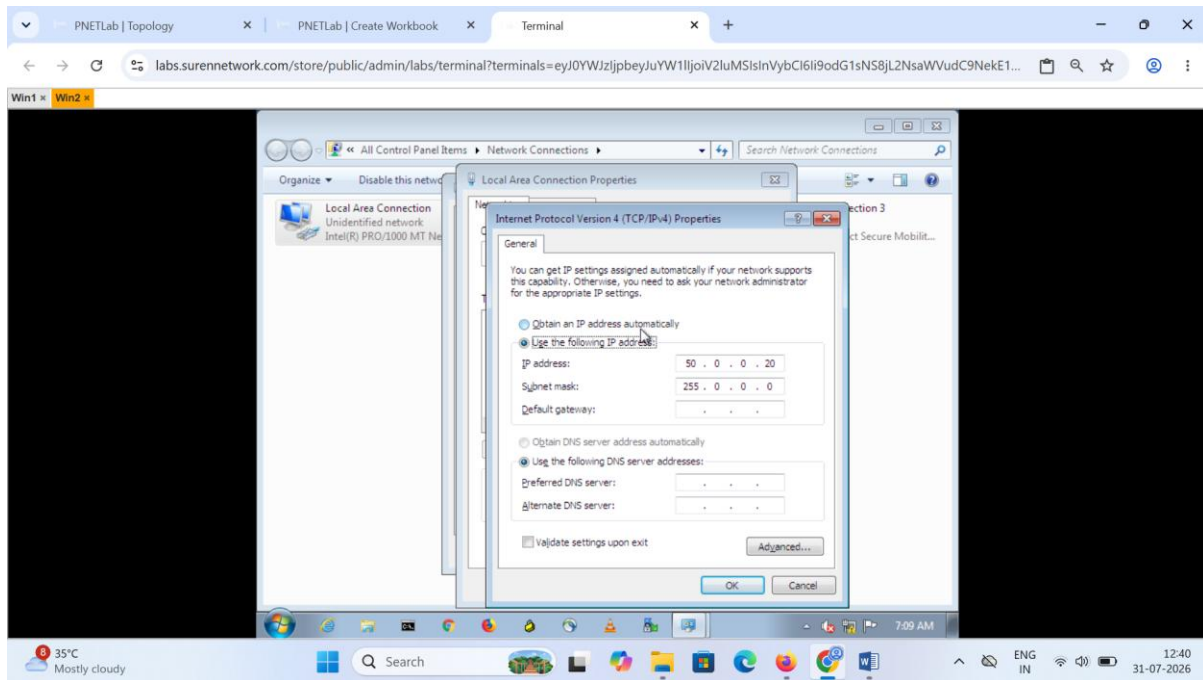

Once assigned ip check its taken or not by using ipconfig command in cmd

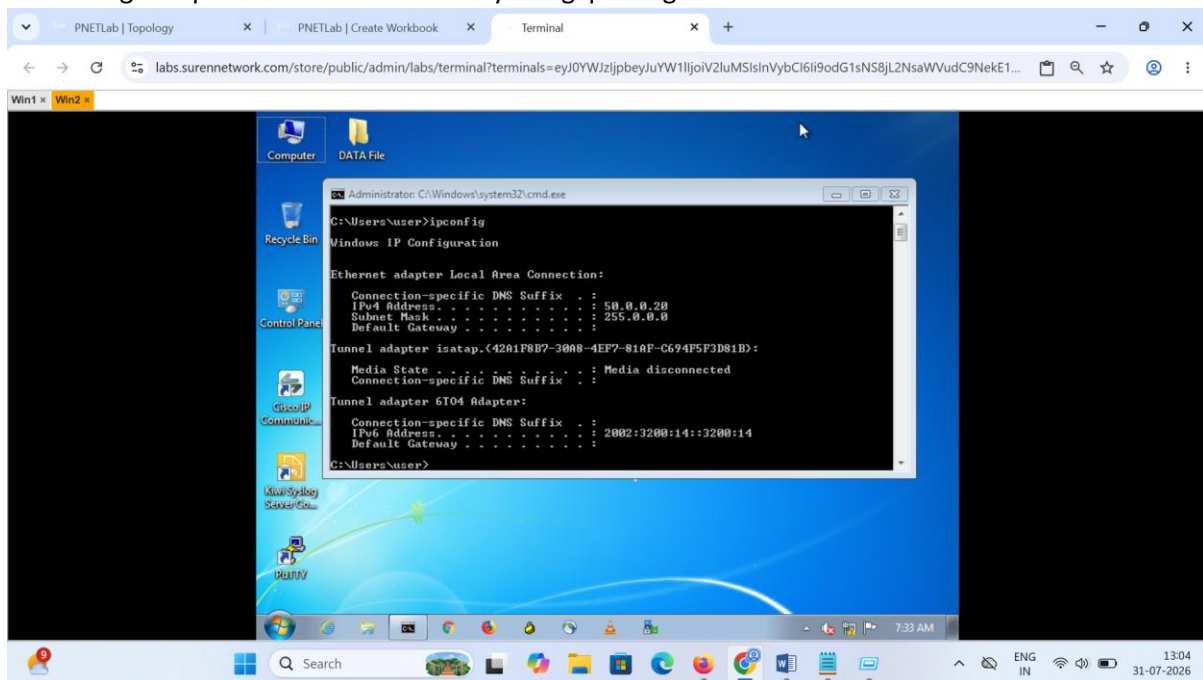




Set hostname for two computers


Computer1 — sys1

Computer2 — sys2


Go to run type sysdm.cpl

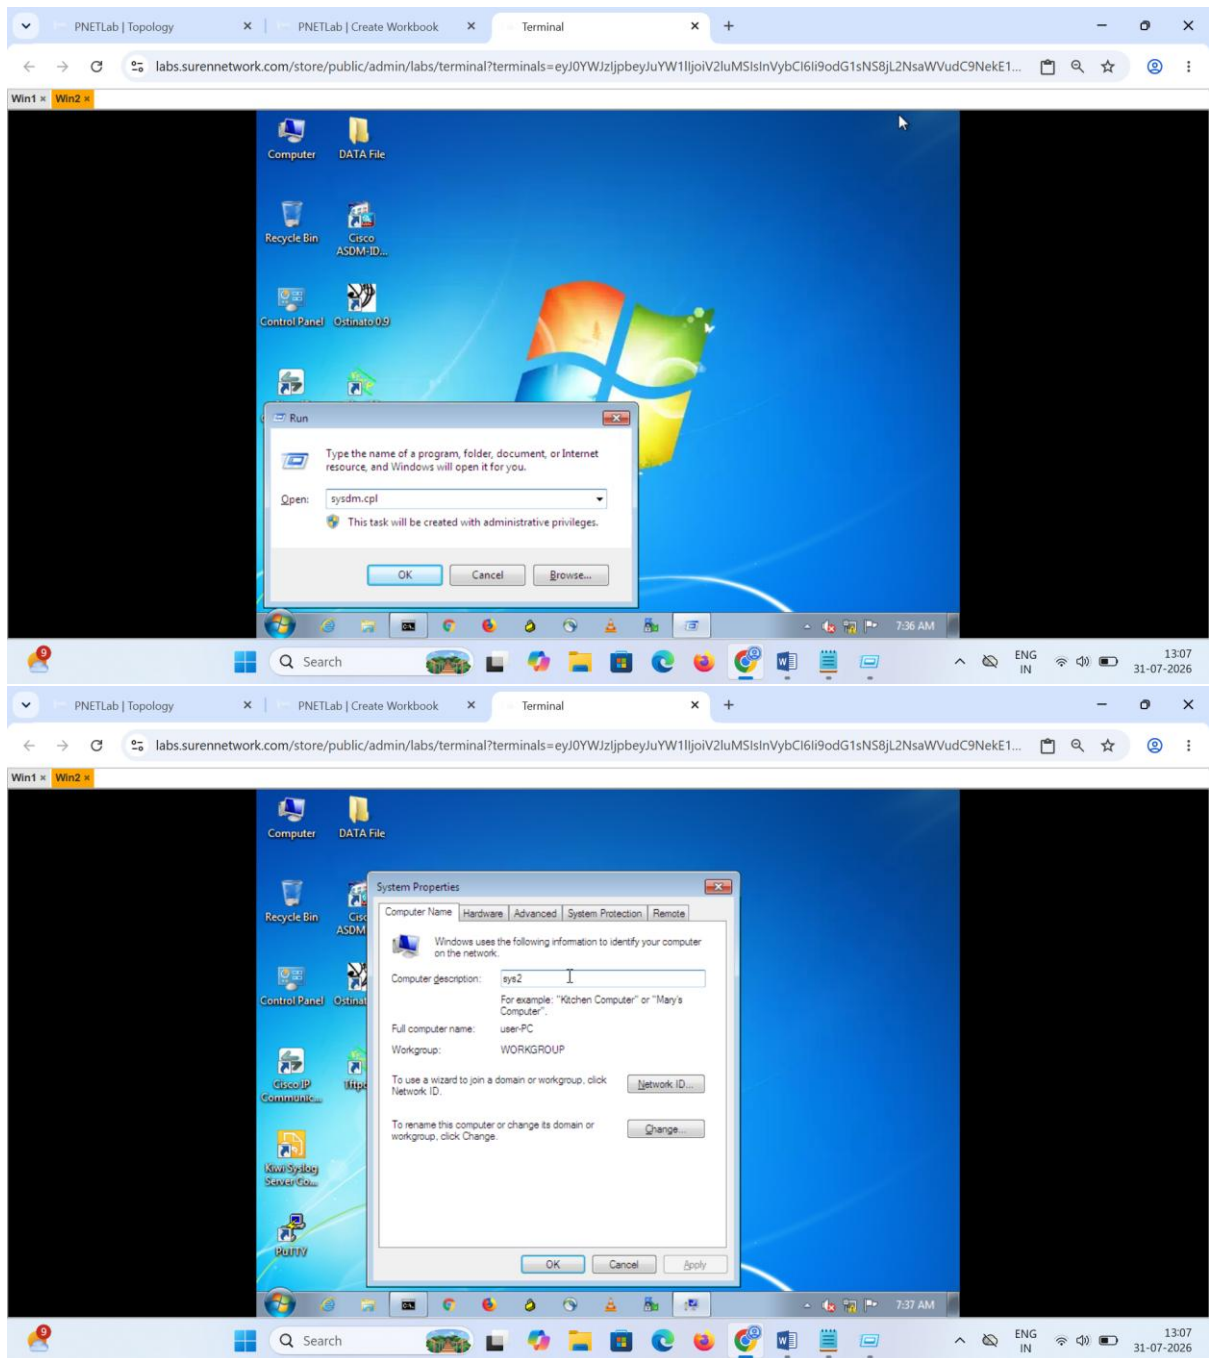

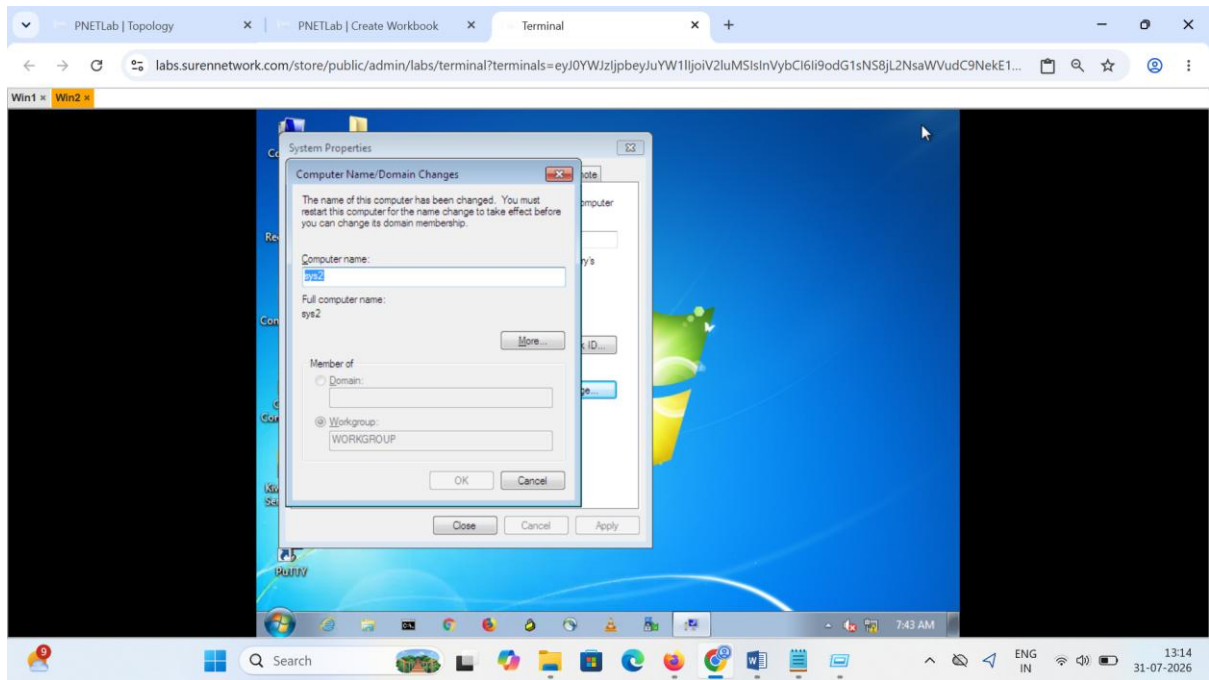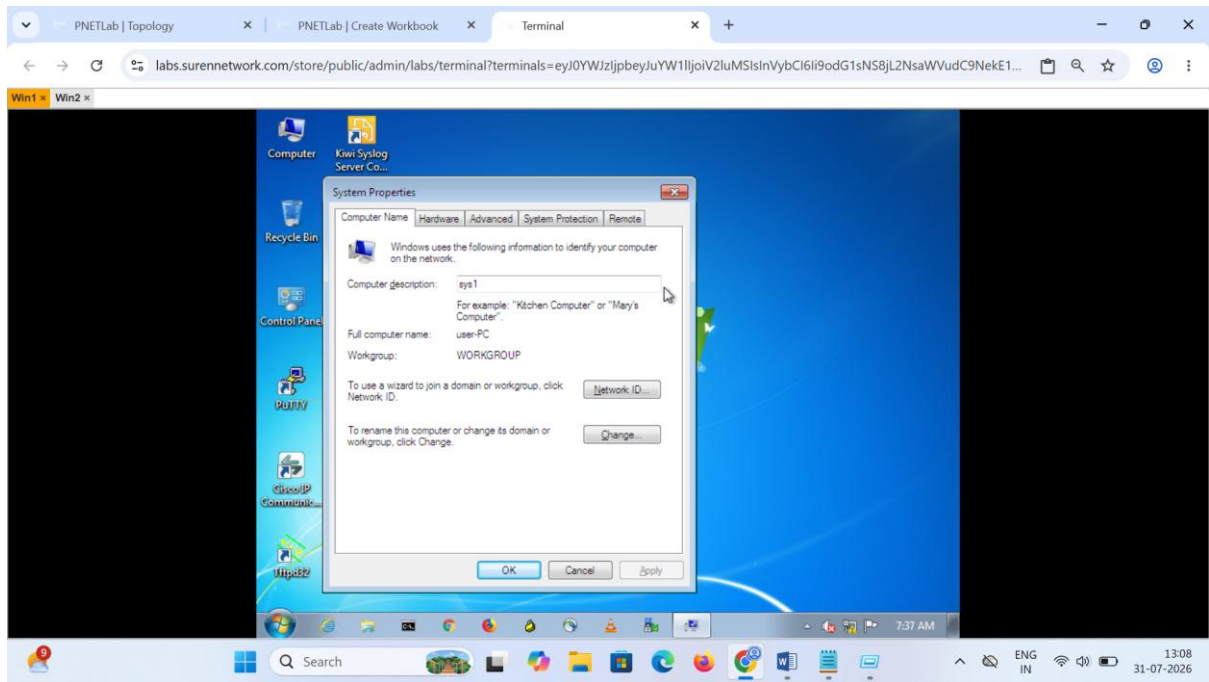


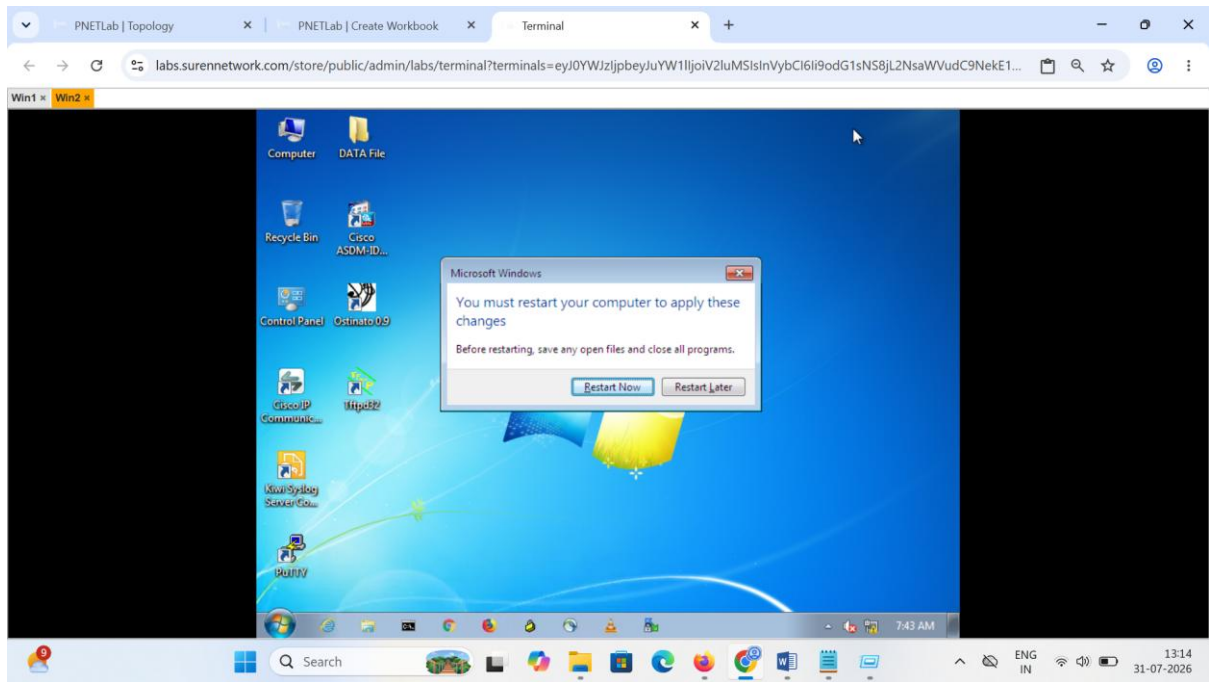



After Create One in Desktop Win2 pc 50.0.0.20 DATA File Folder and sharing the permission read, write, edit everyone take remote Desktop RDP 3389 access remotely win1pc to win2 pc

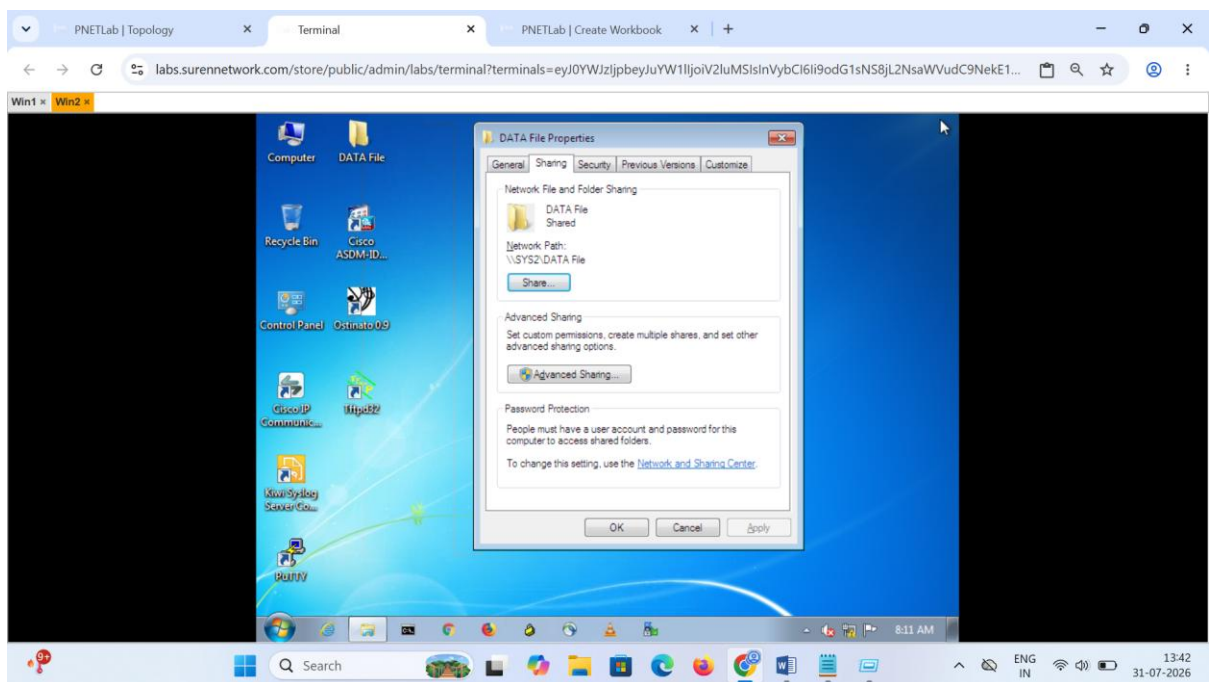


Create one test file sharing folder

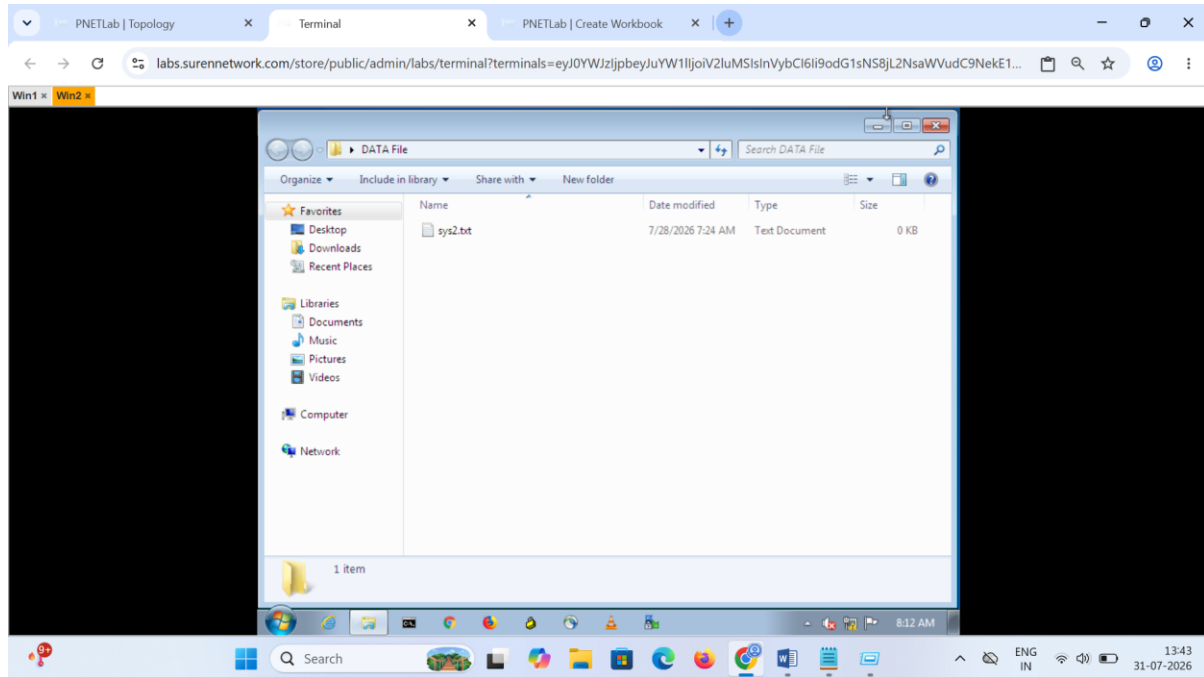

Take Remote Sys1 Process step:Goto setting open run putting cmd open continues the command mstsc (remote desktop) given user name and password AFTER getting auth and give permission successfully opne remote system win2 pc 50.0.0.20

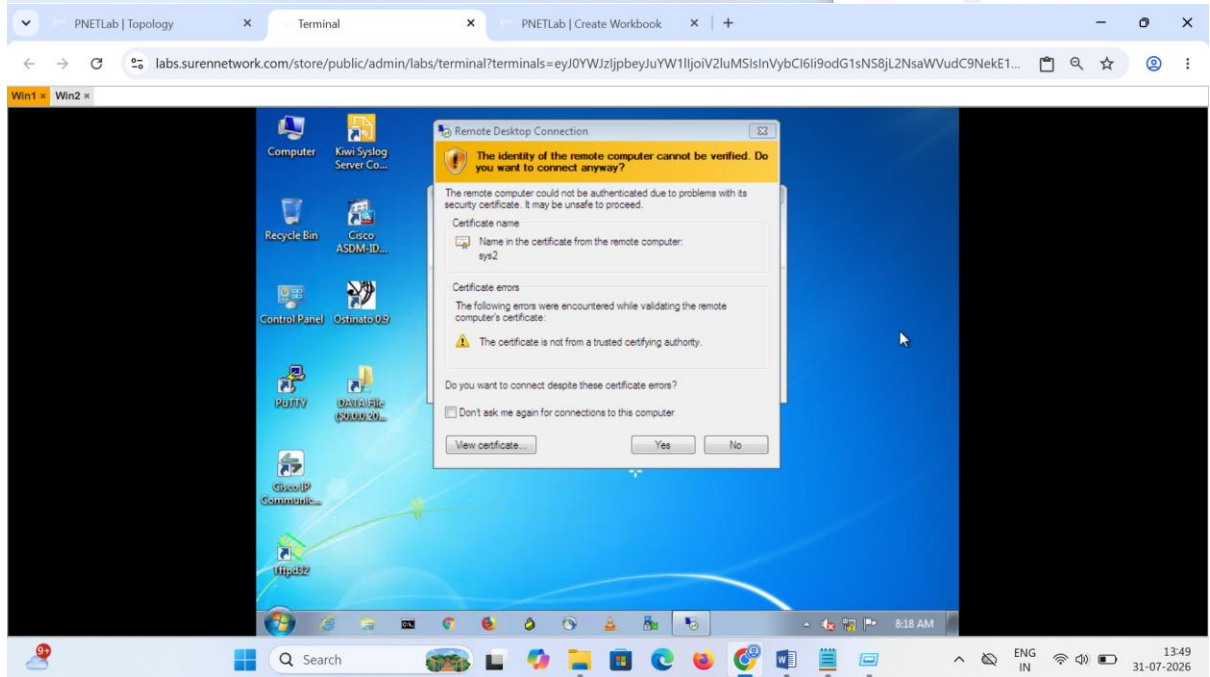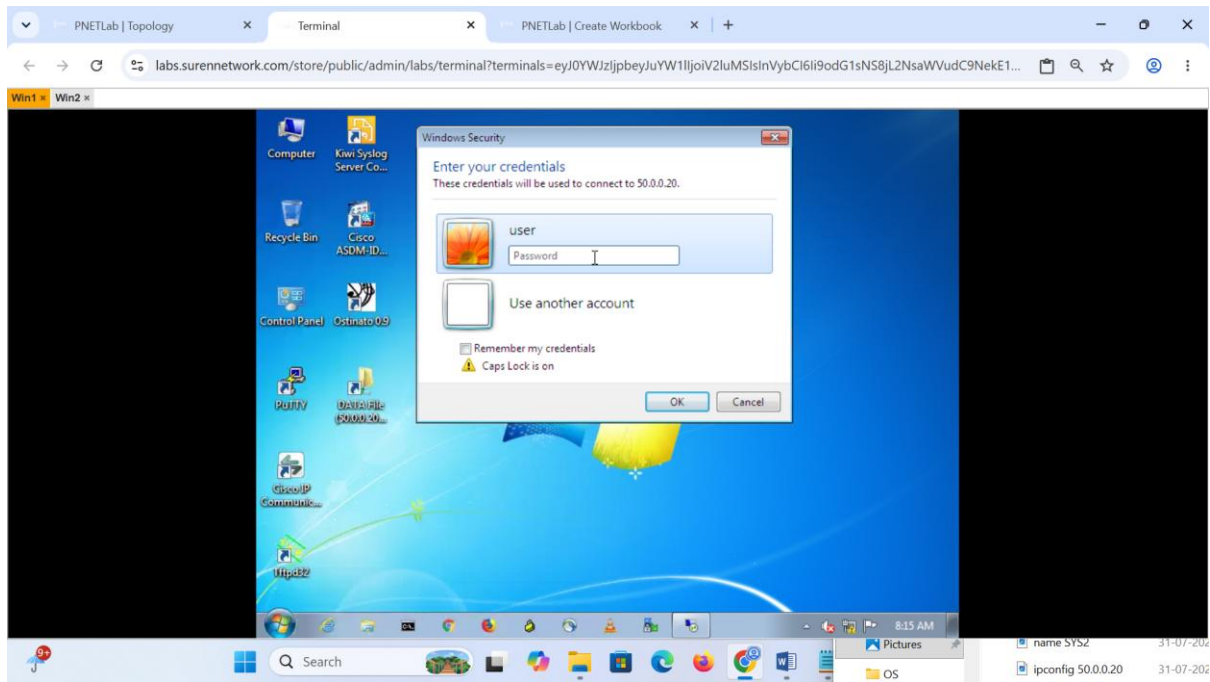

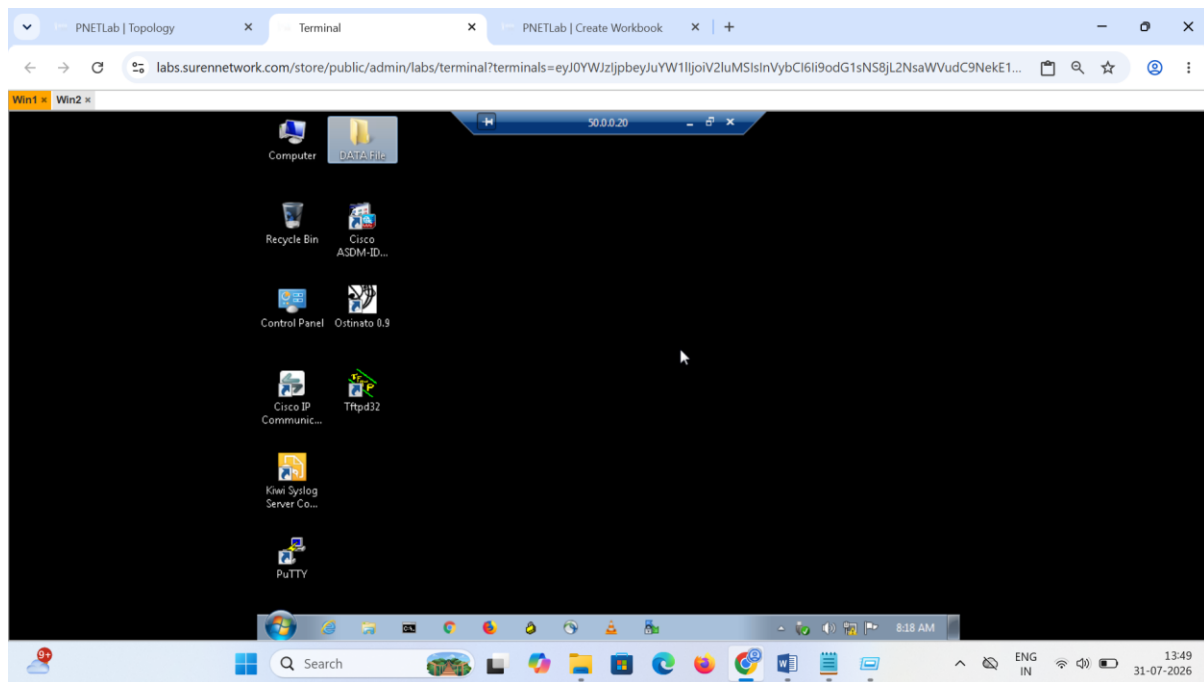

After complete setup communicated win1 50.0.0.10 & 50.0.0.20