





USB interface

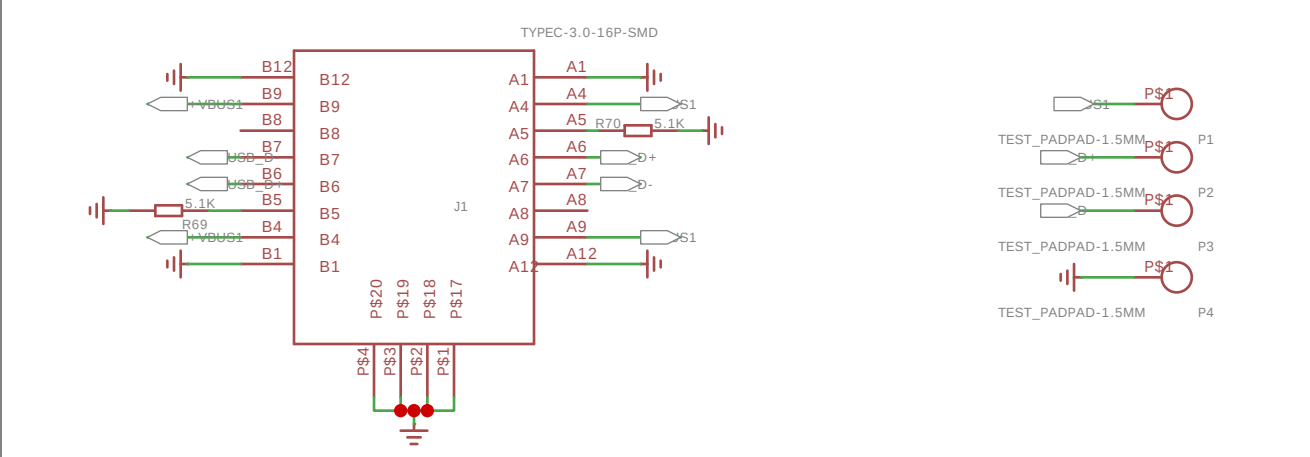



Automatic download circuit

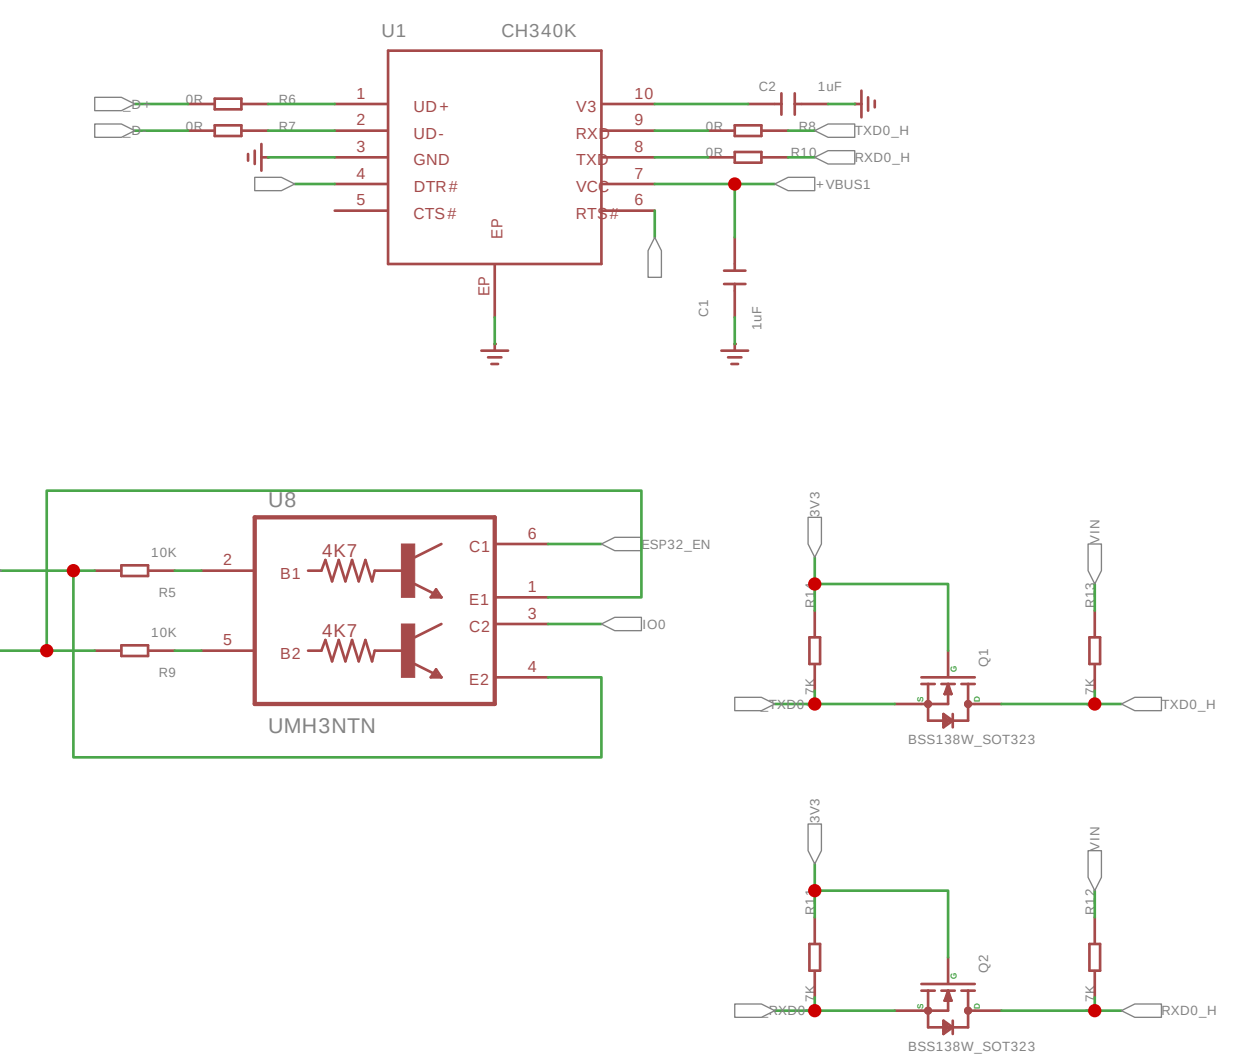

ESP32-S3-N16R8

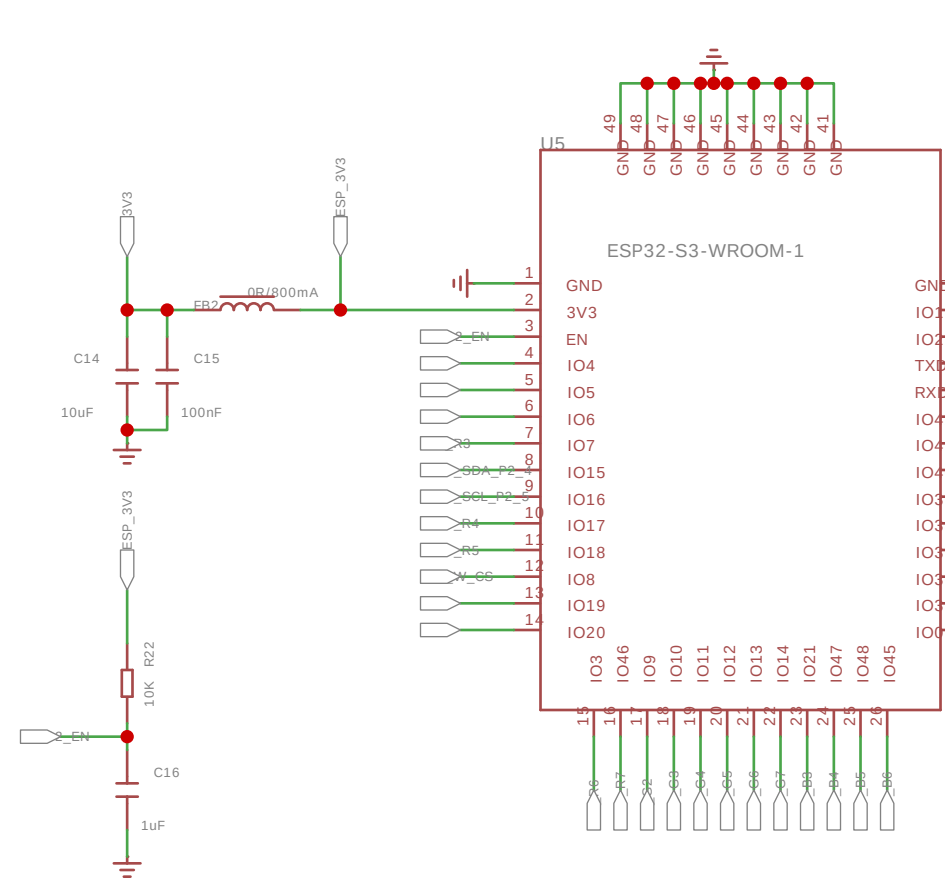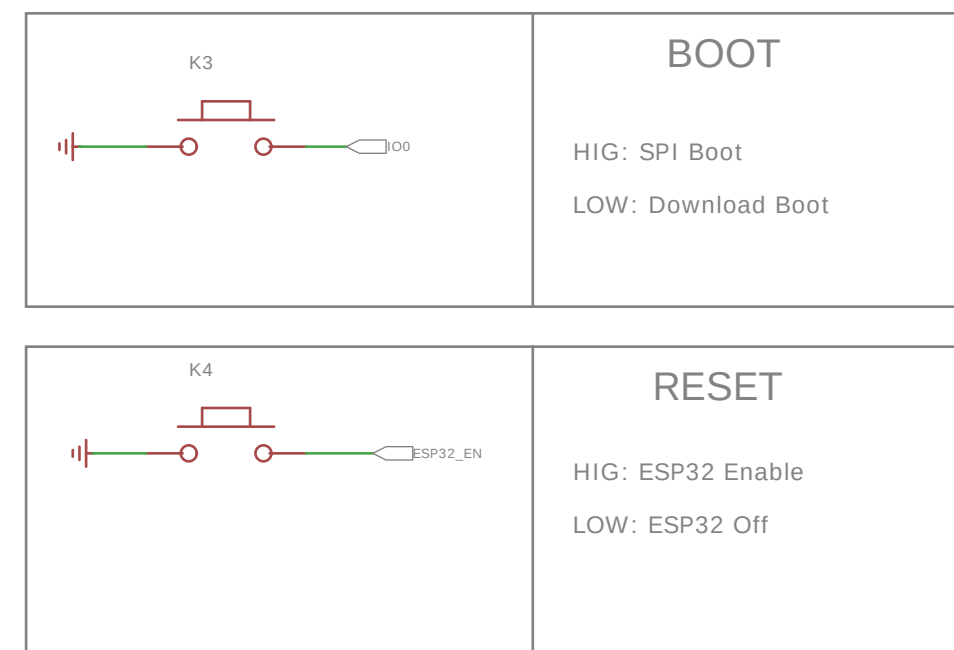


4.3 inch IPS interface

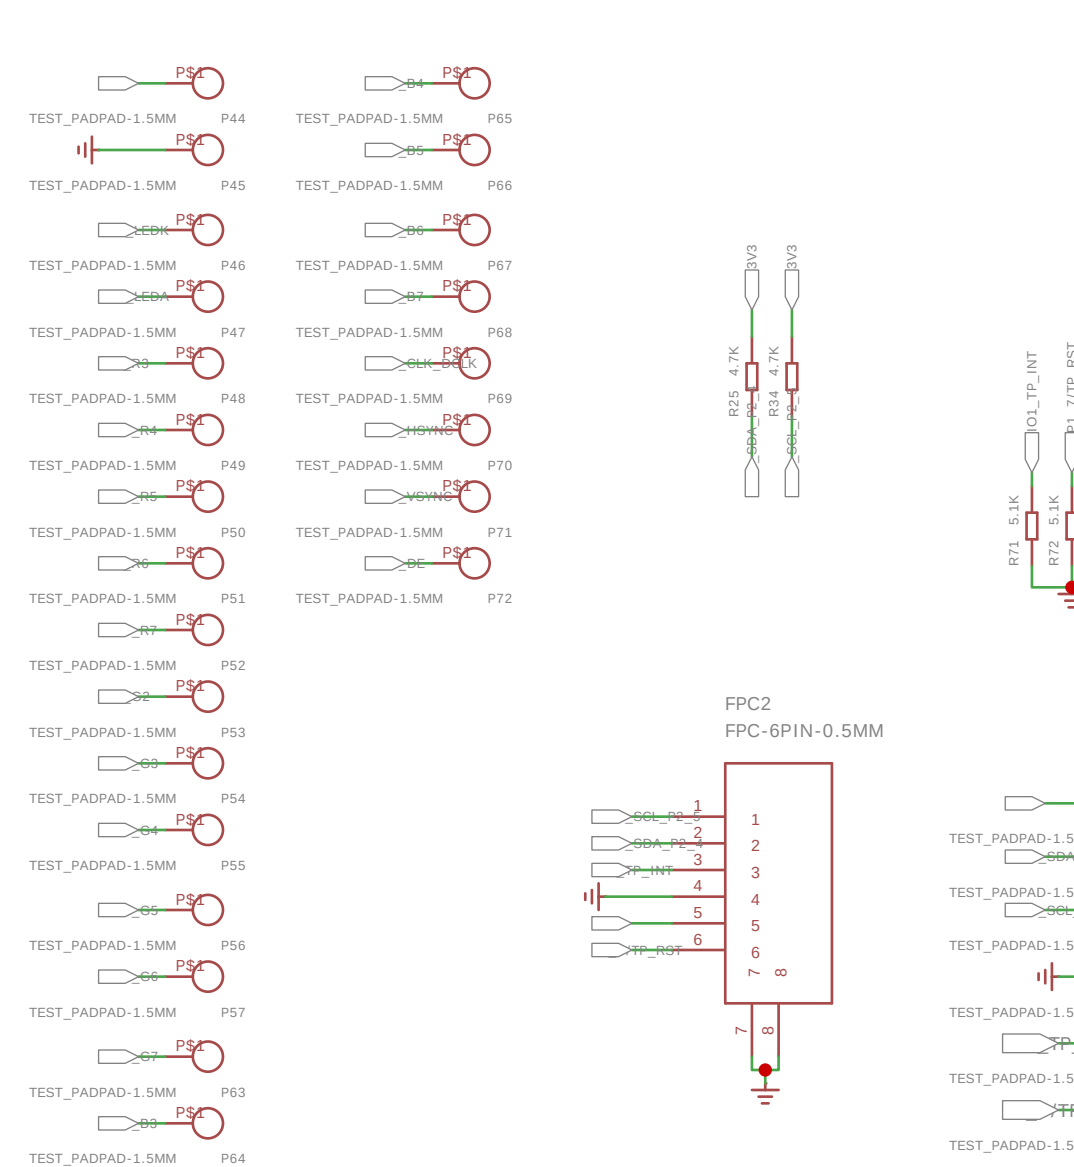
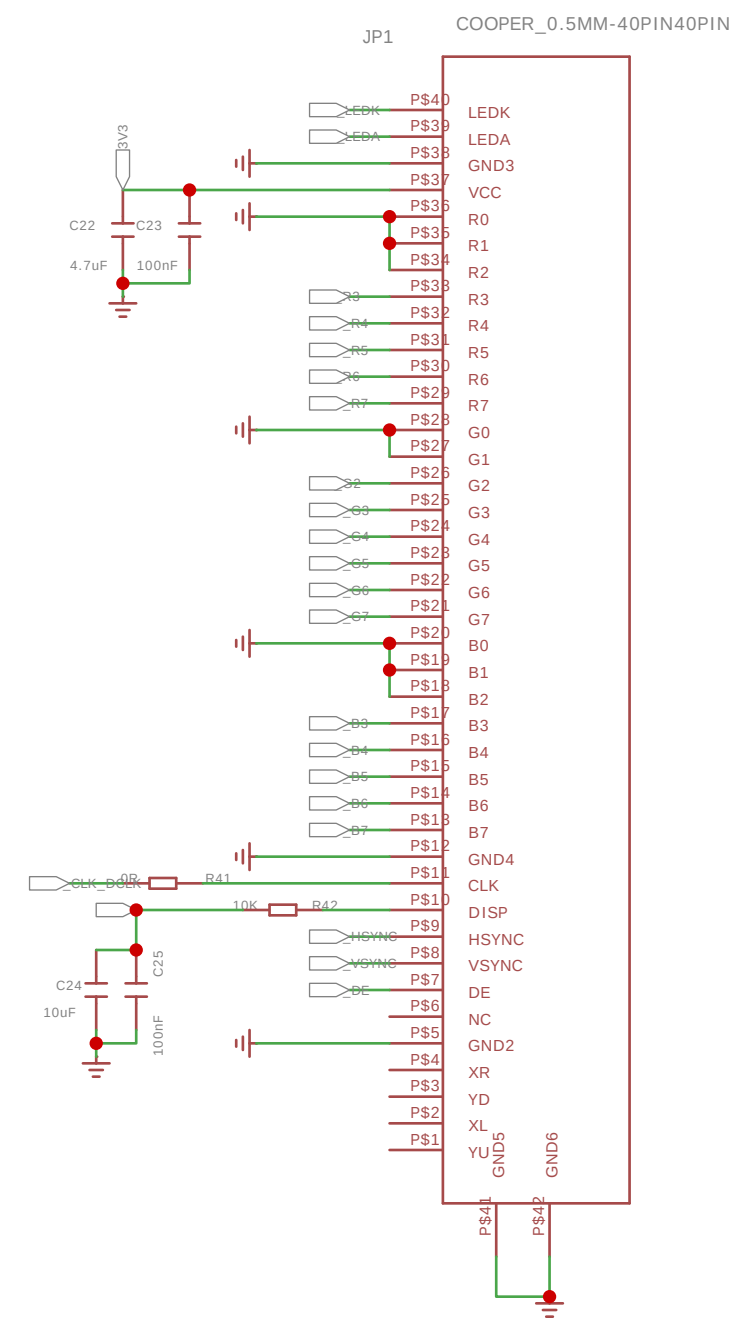


Capacitive touch interface


I2C> IO extension

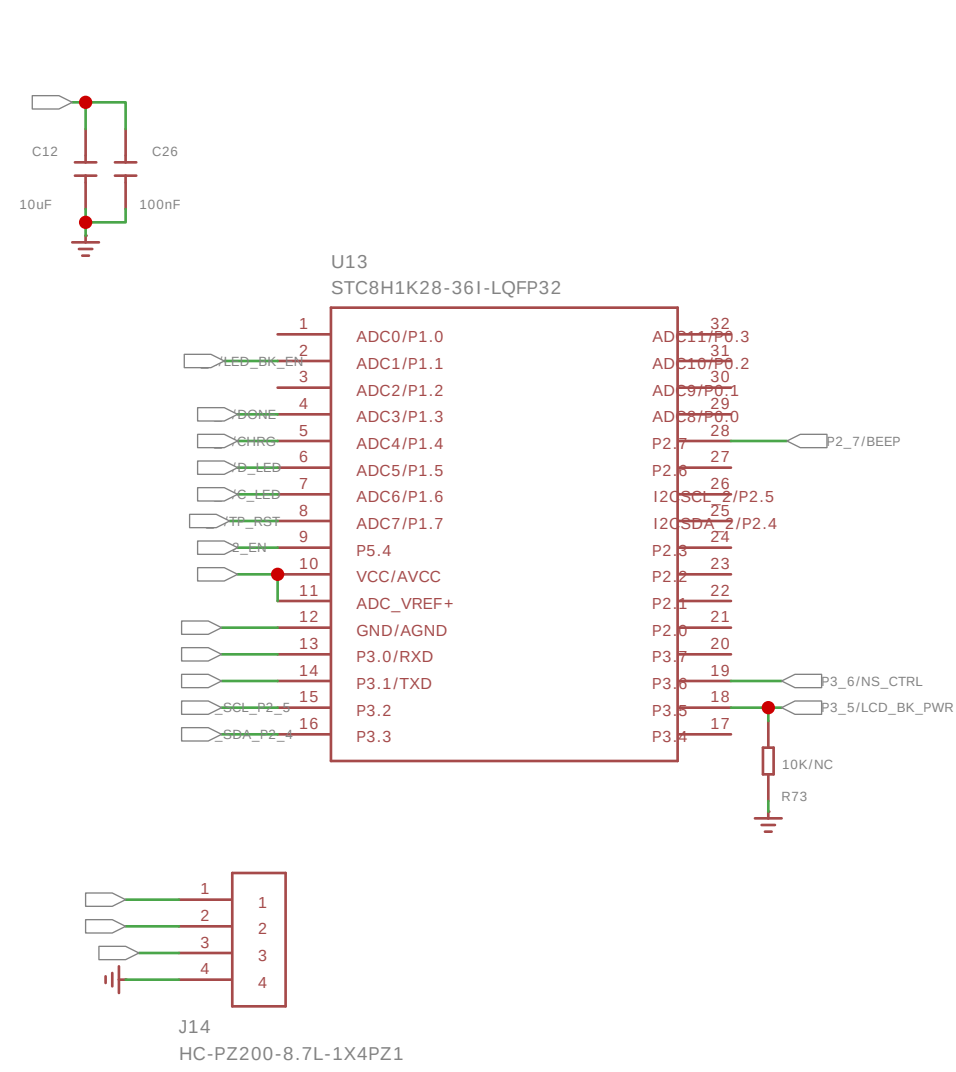


Battery and control

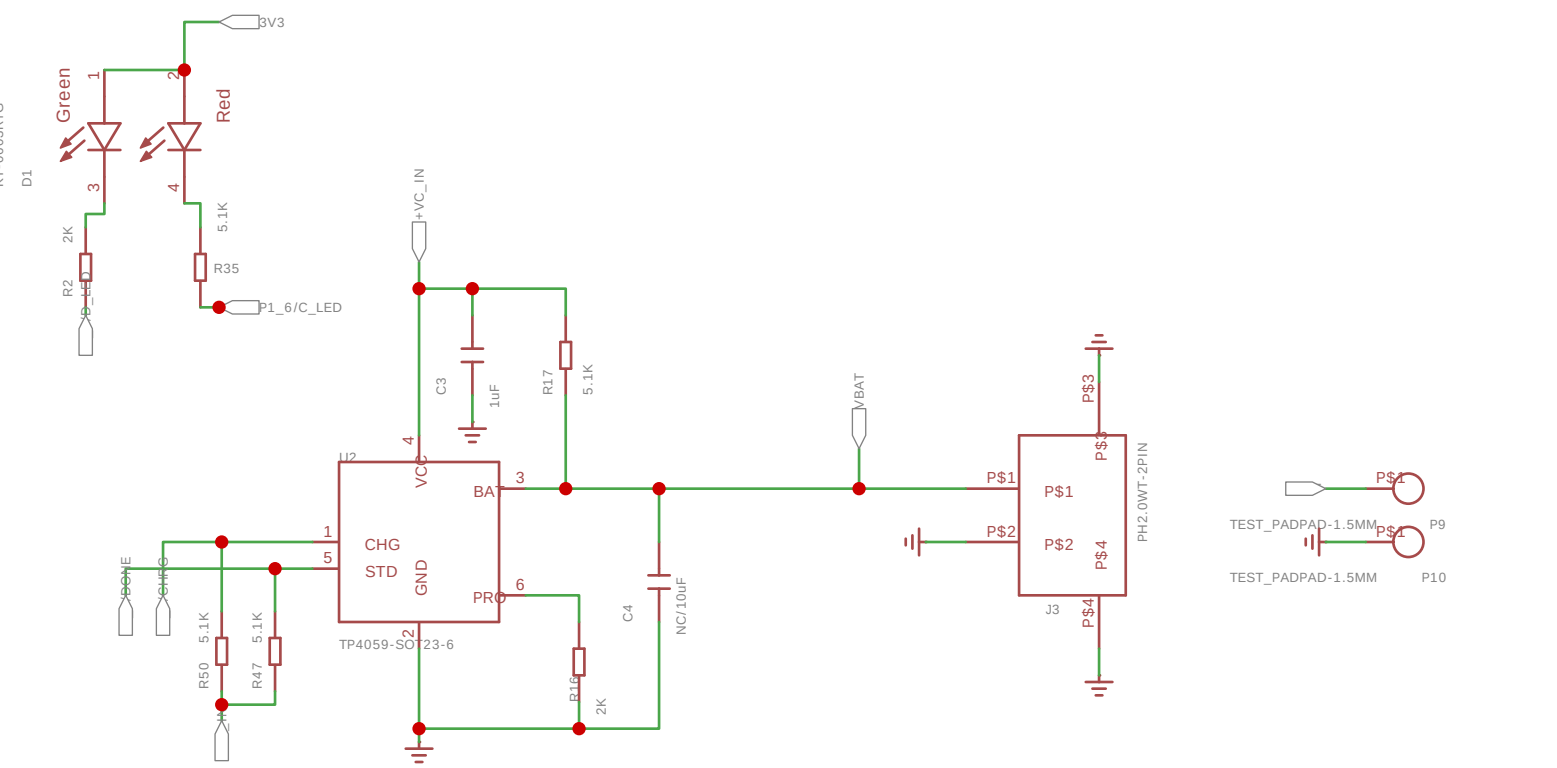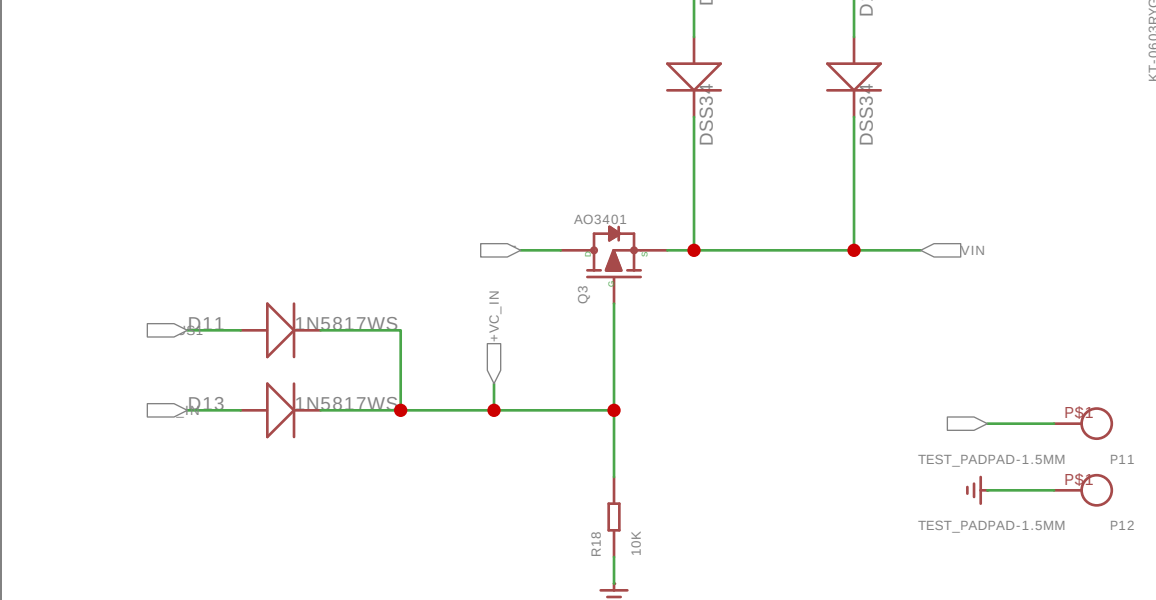


3V3 voltage regulator

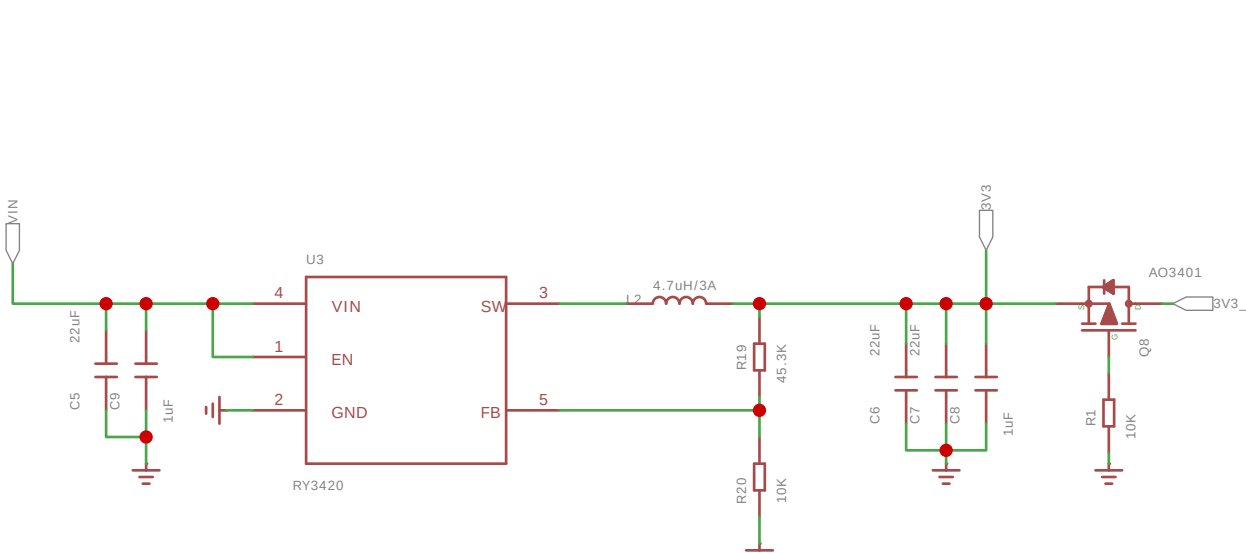


Passive buzzer

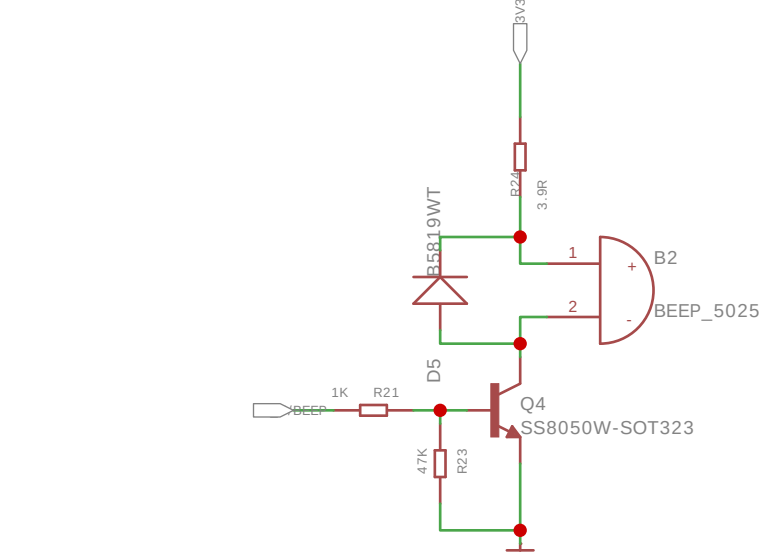


SD card

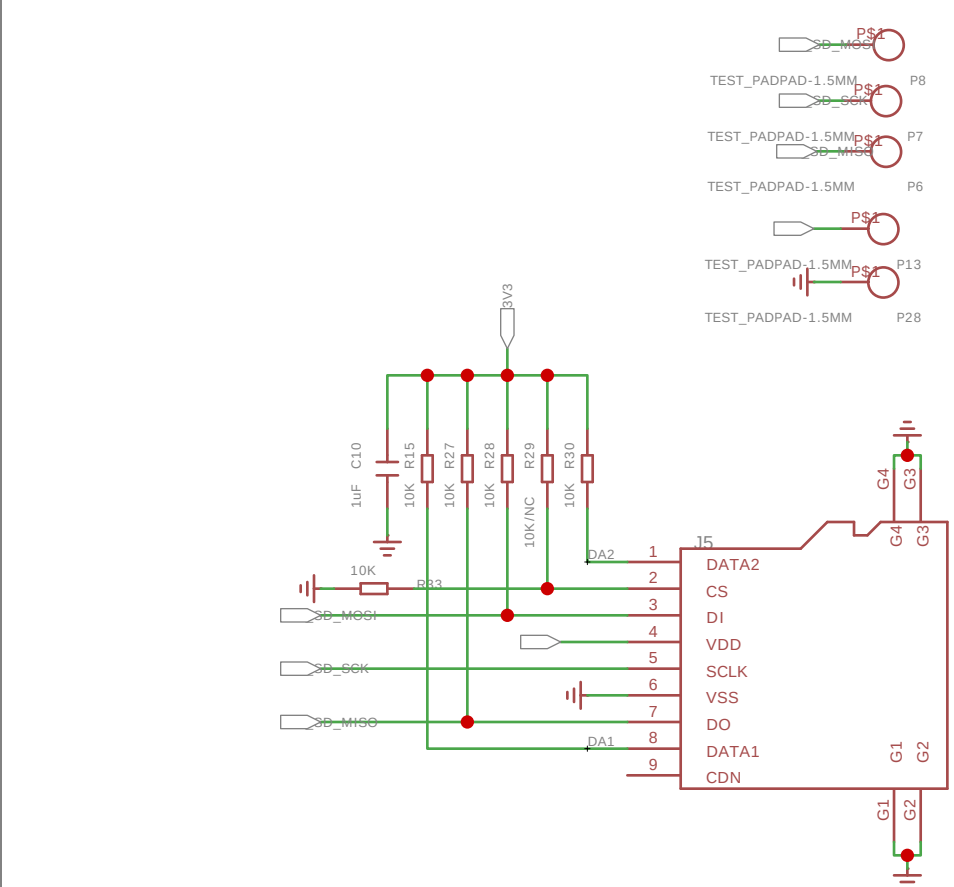

Wireless module

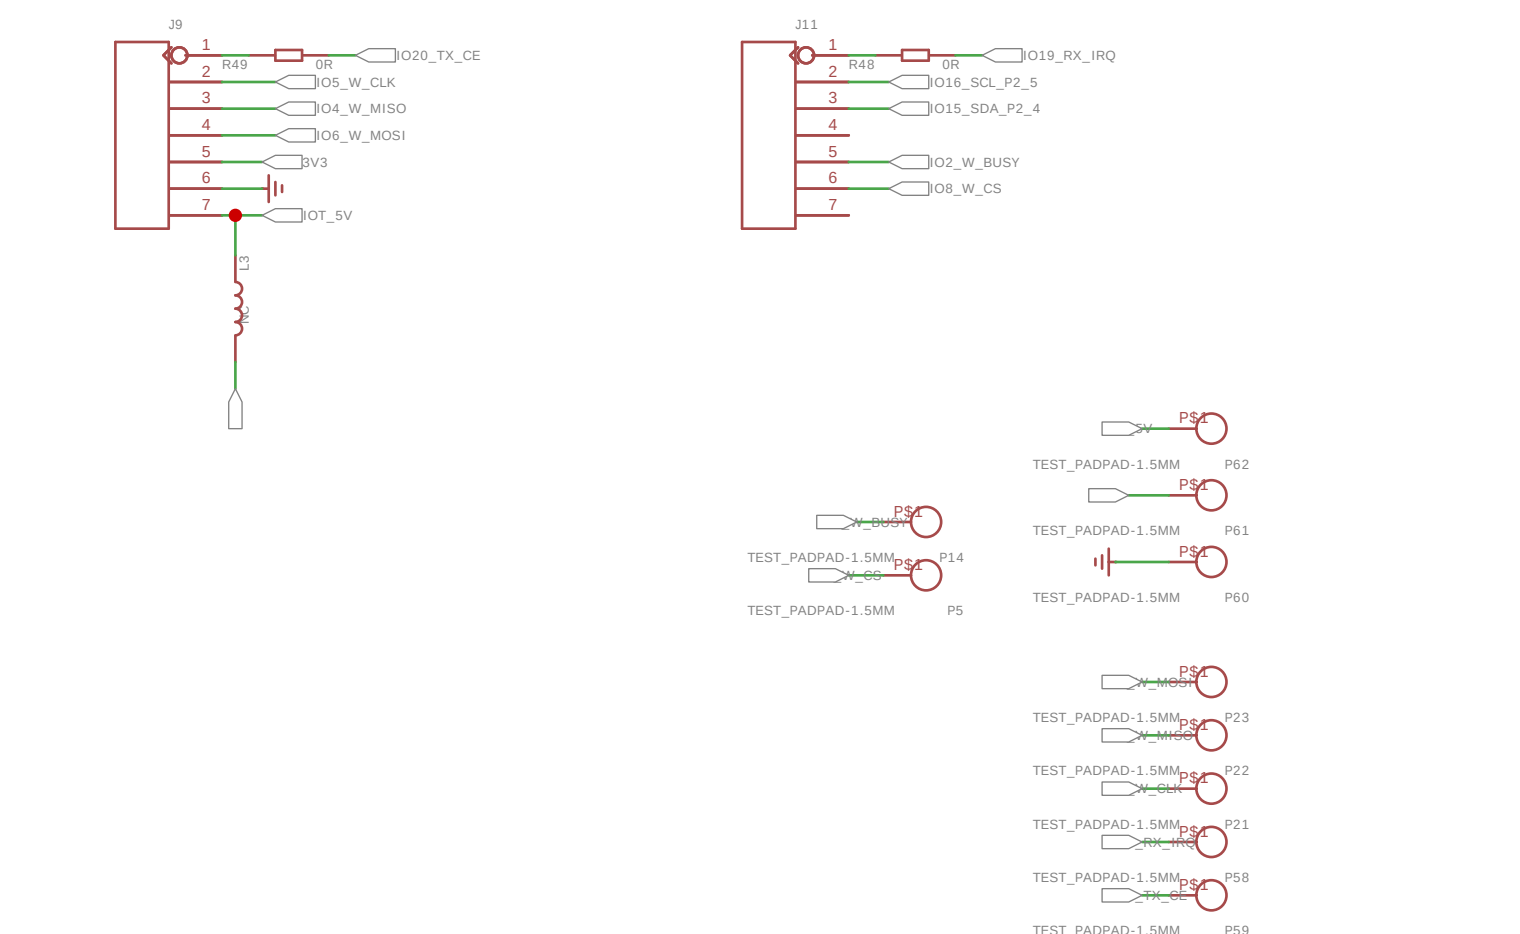


UART & I2C & GPIO extensions

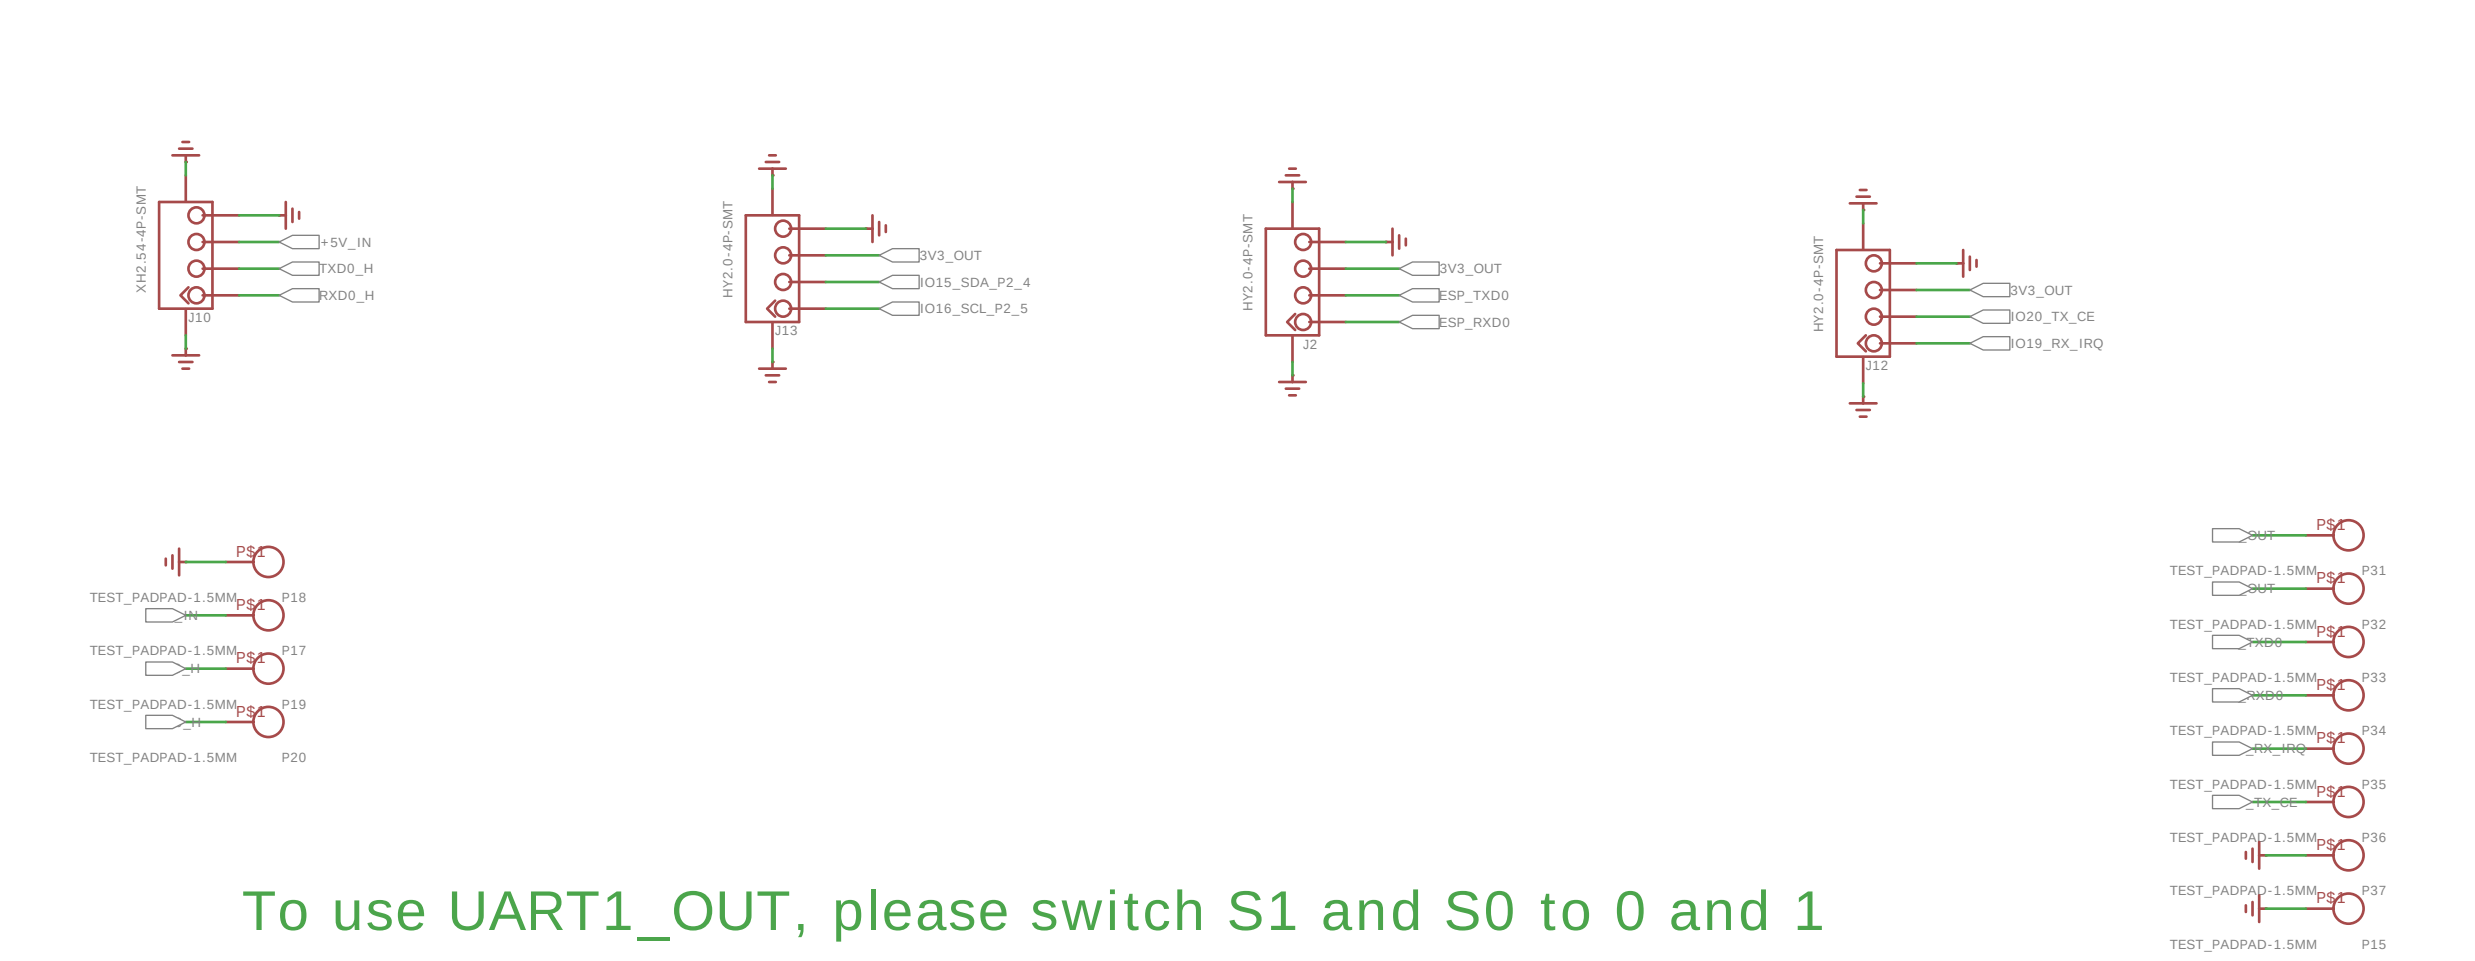


To use UART1_OUT, please switch S1 and S0 to 0 and 1



RTC clock

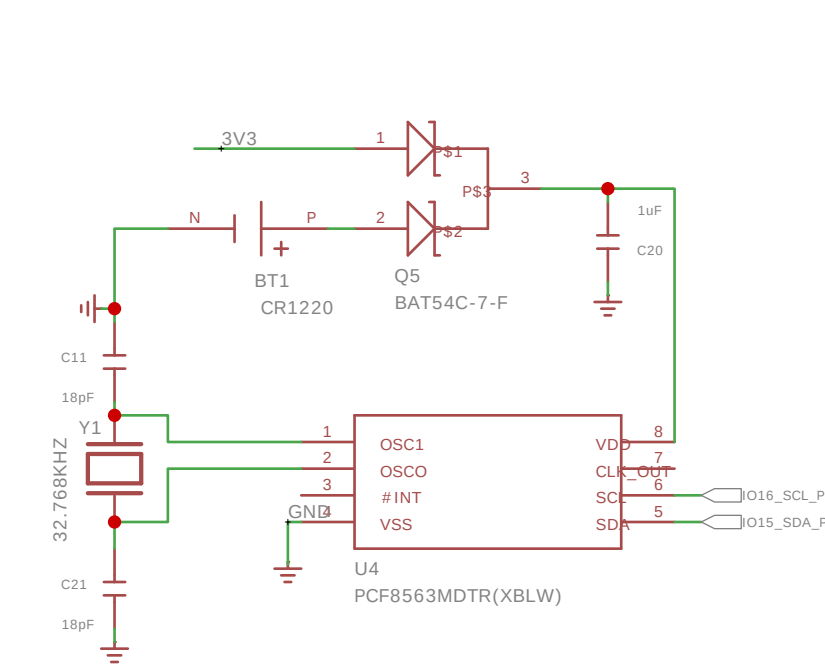

I2S MIC

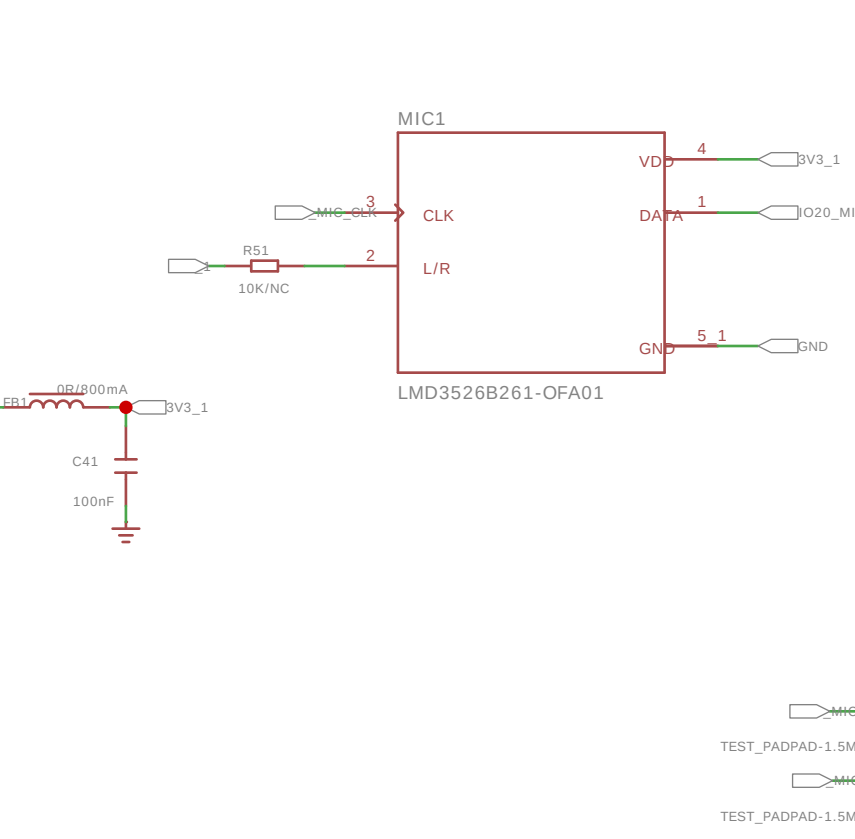


Power amplifier

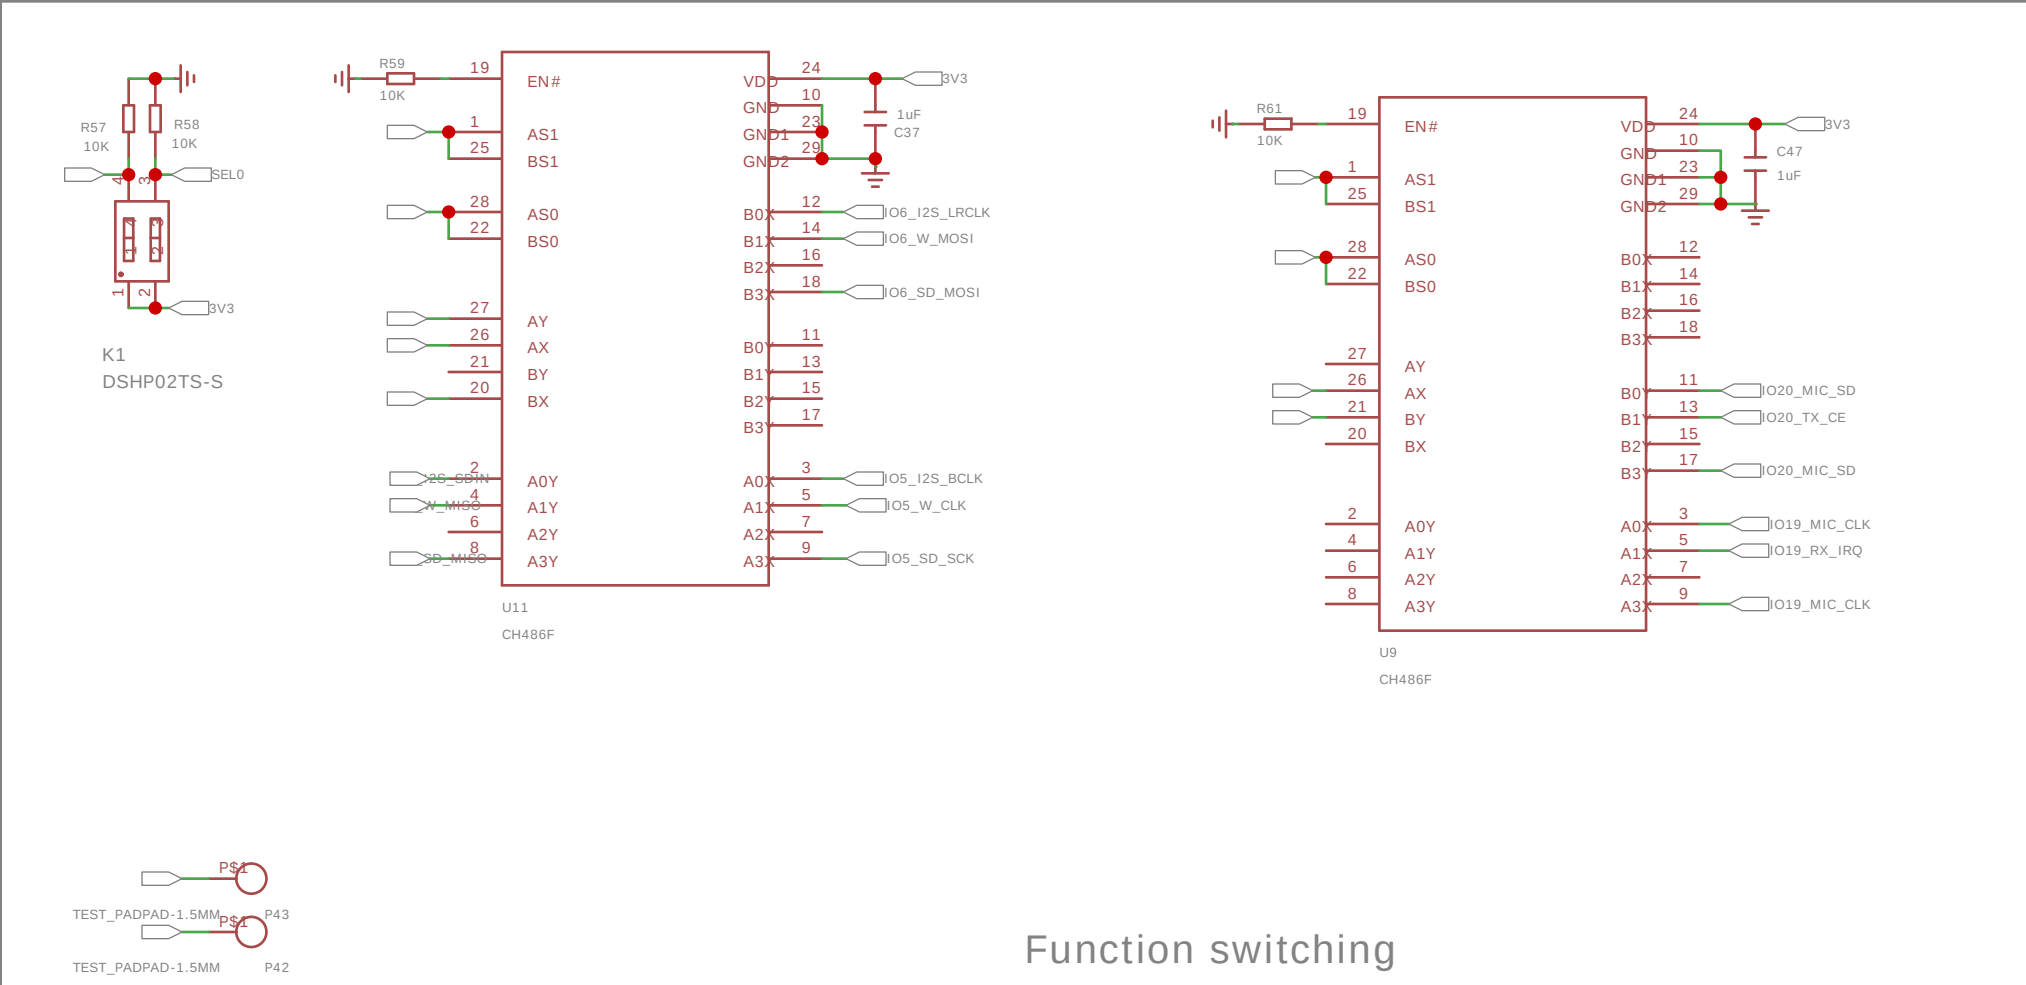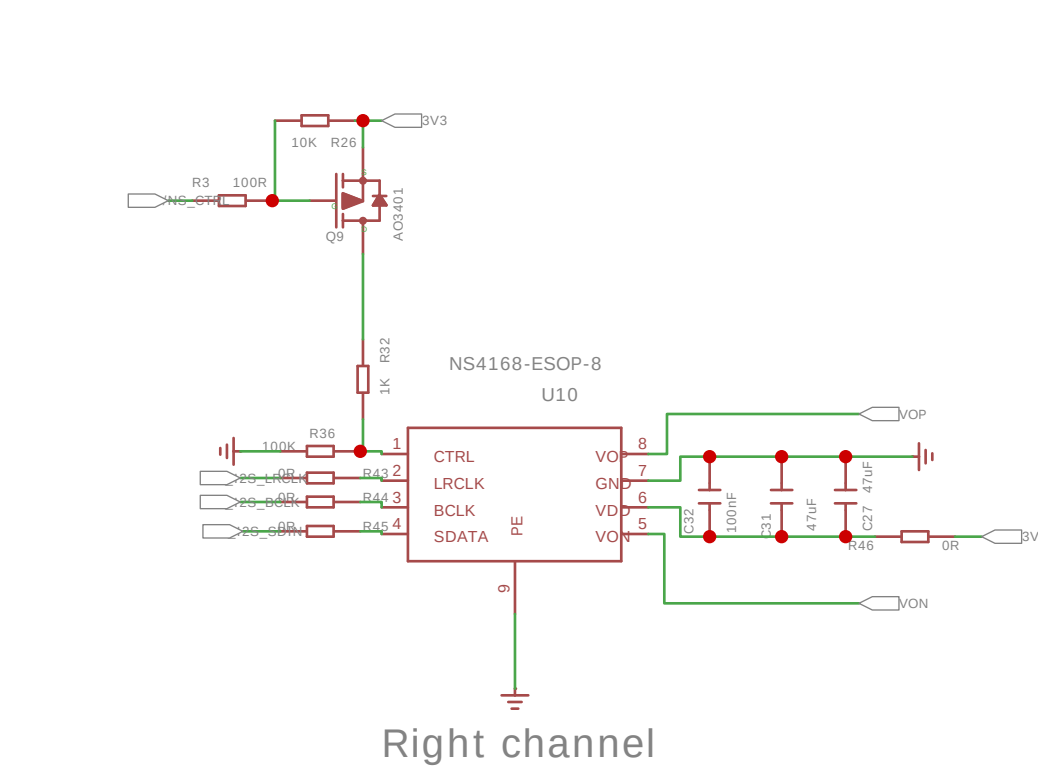

Function switching

To use UART1_OUT, please switch S1 and S0 to 0 and 1

Indicator lights for power and charging

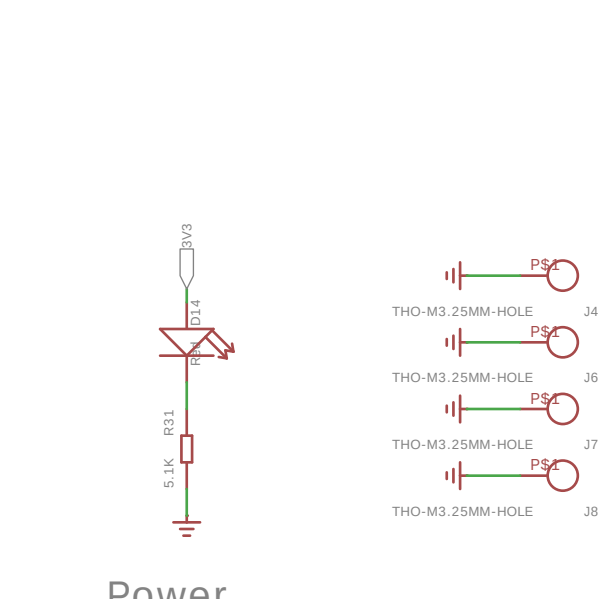

Power