





USB interface

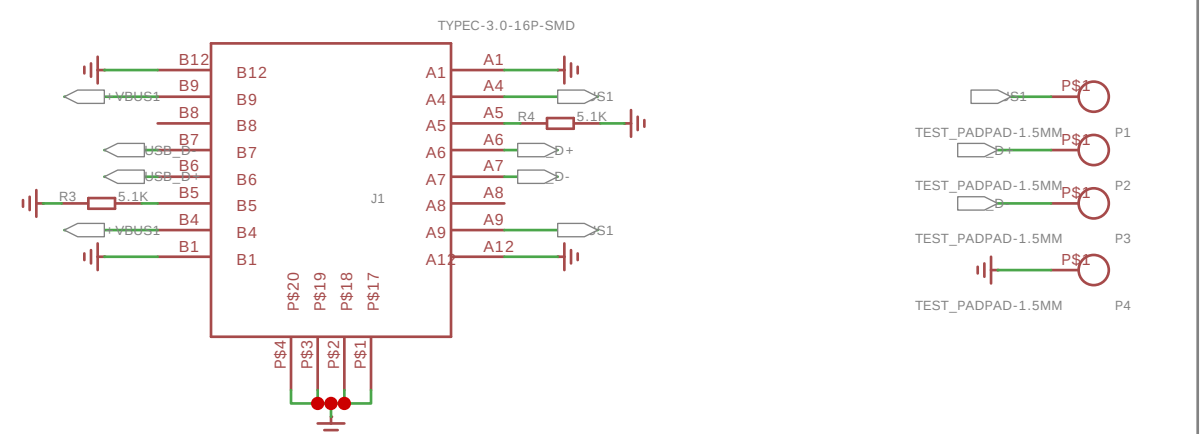


Automatic download circuit

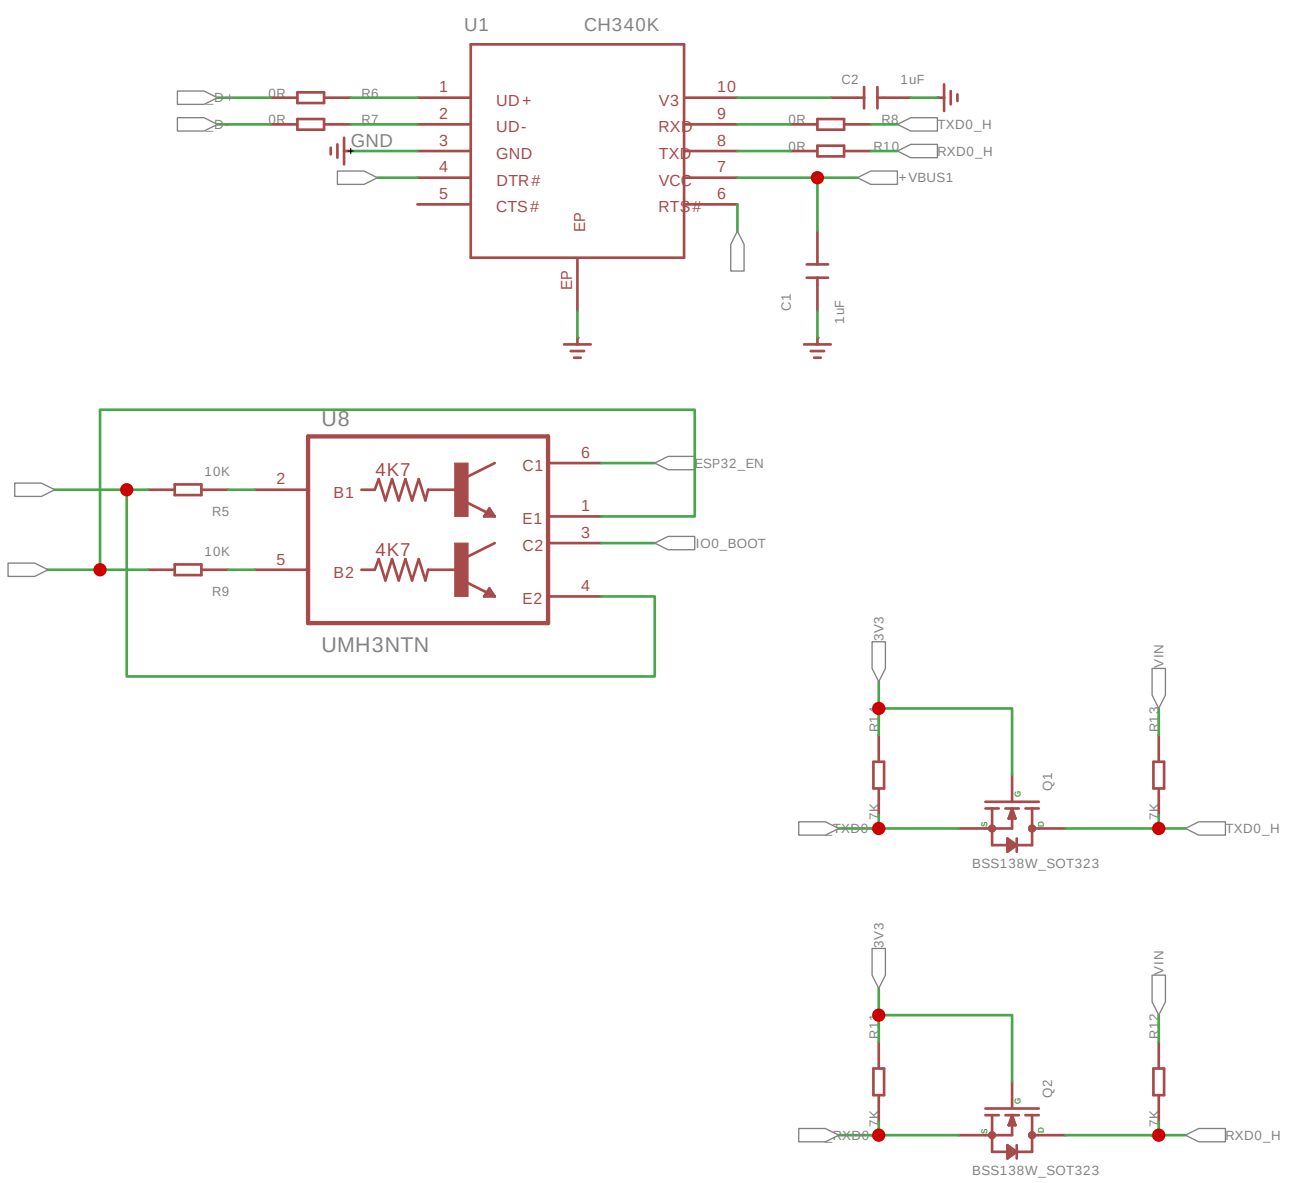


ESP32-S3-N16R8

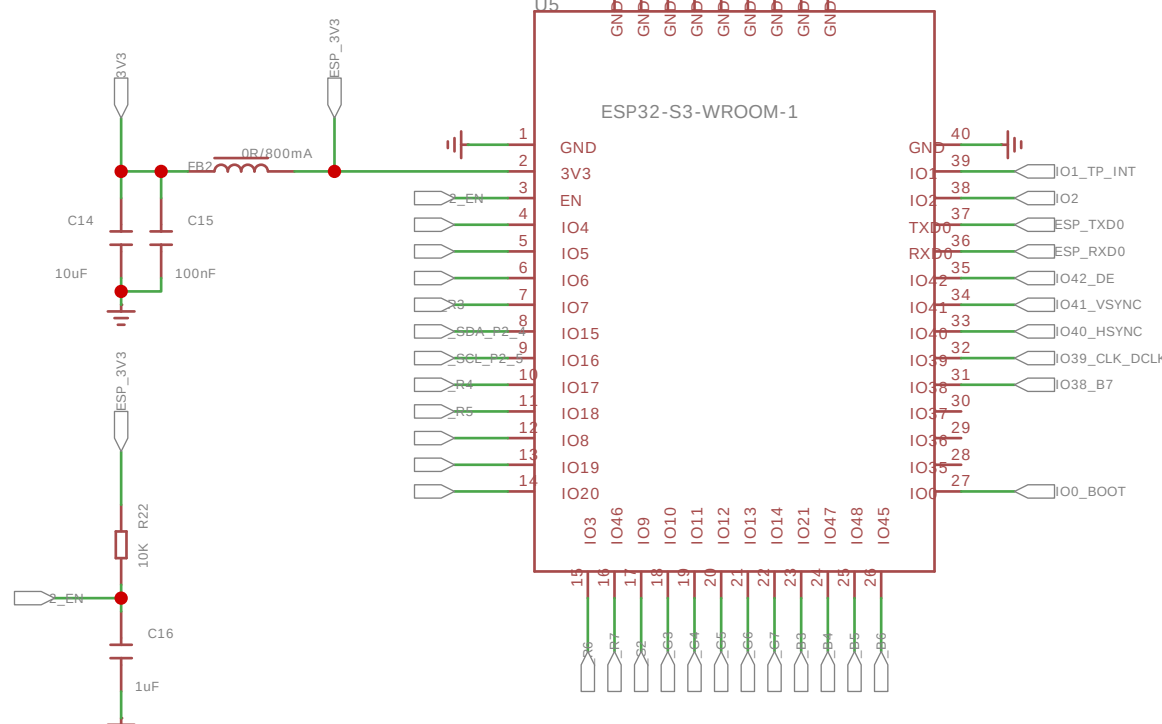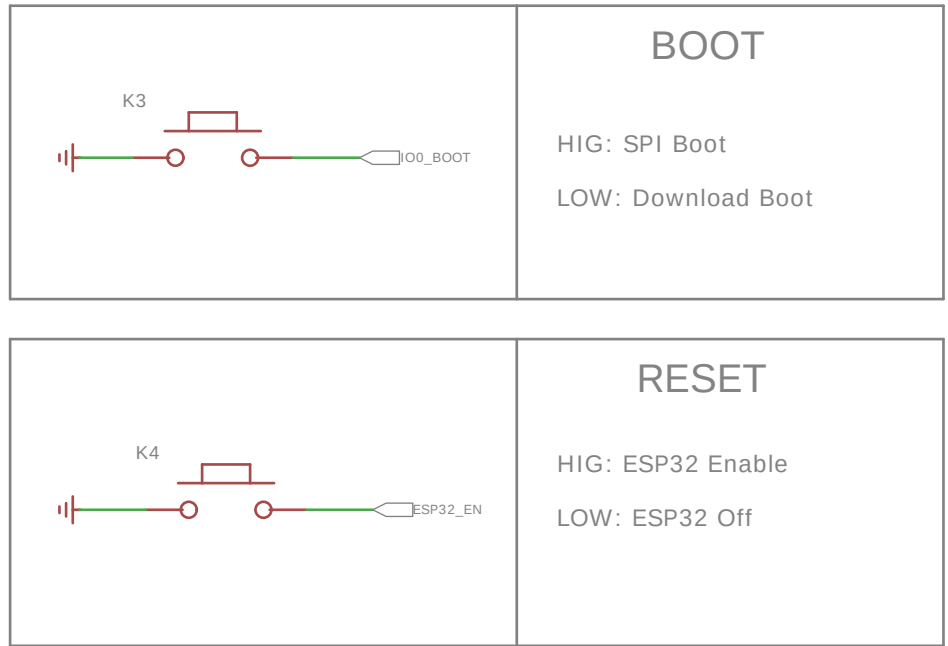


7.0 inch IPS interface

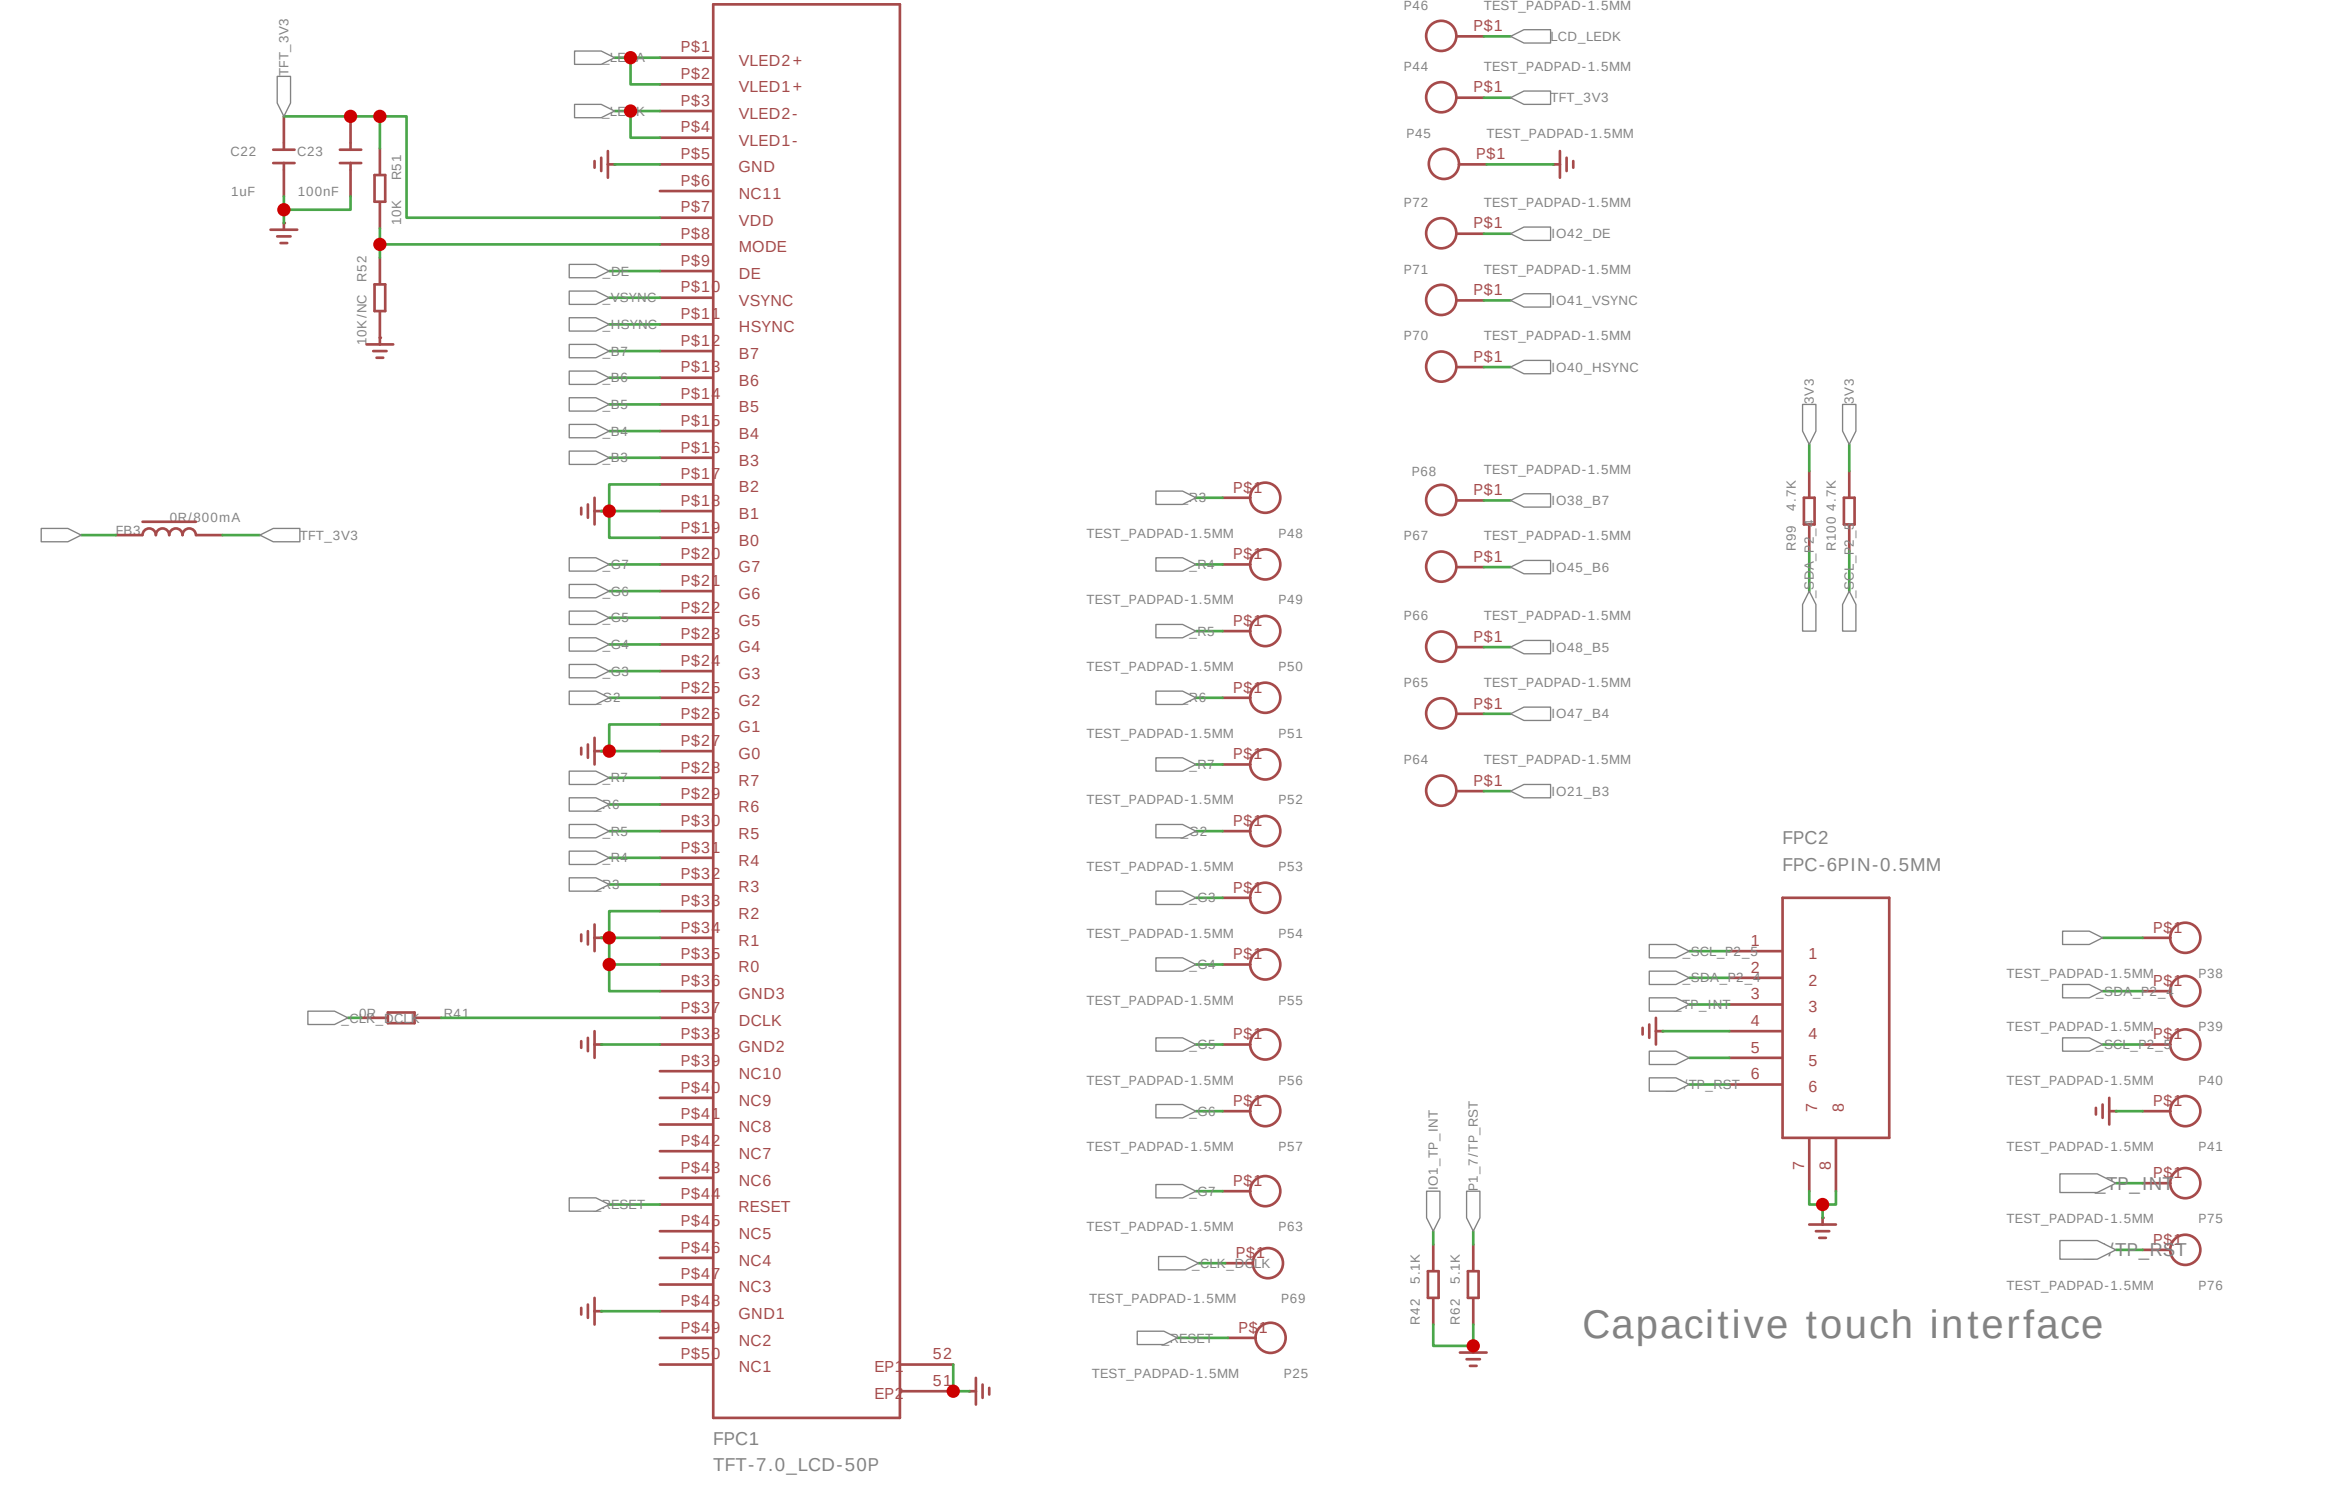


I2C>IO extension

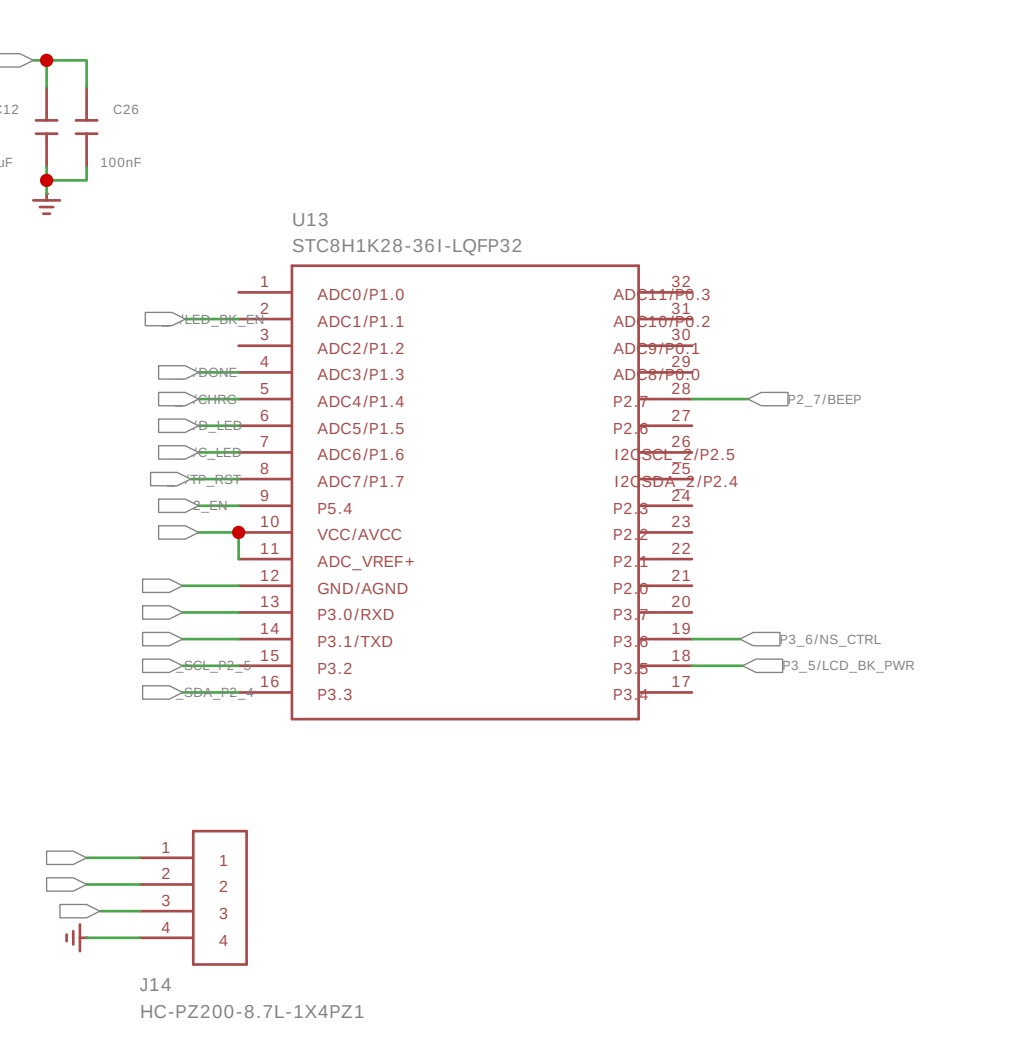


Battery and control

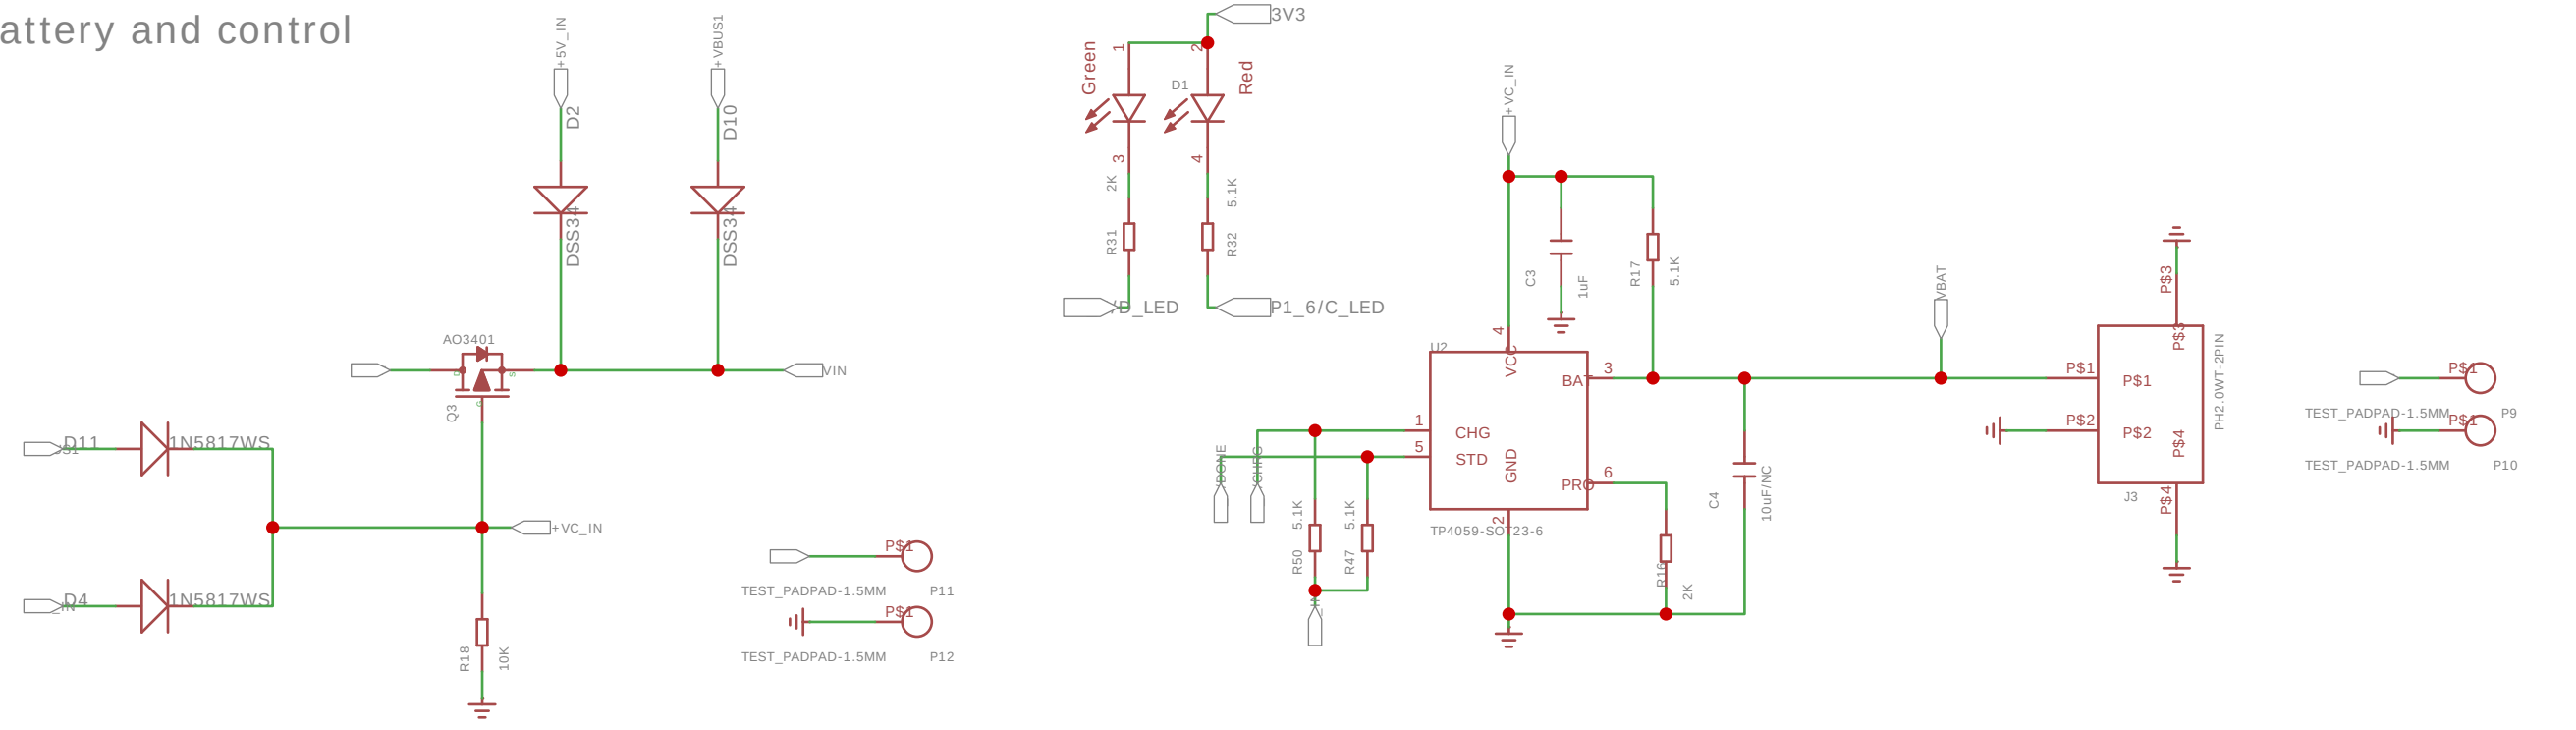


DC-DC Step Down

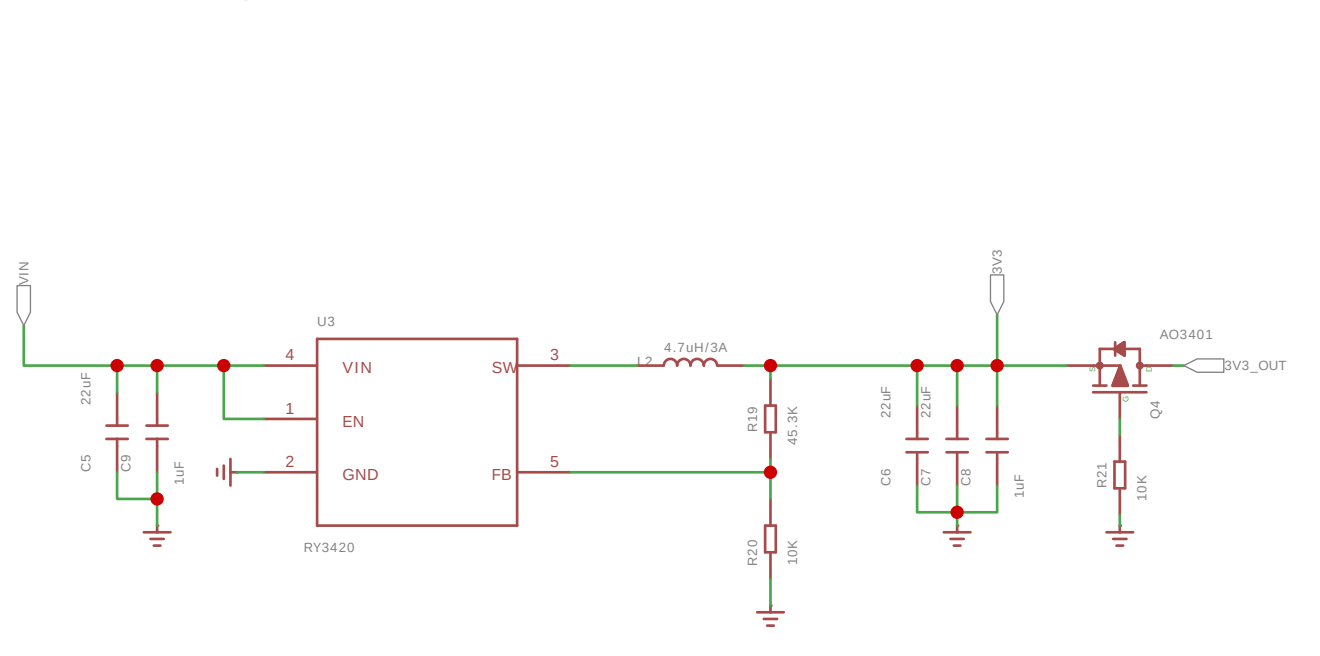


Passive buzzer

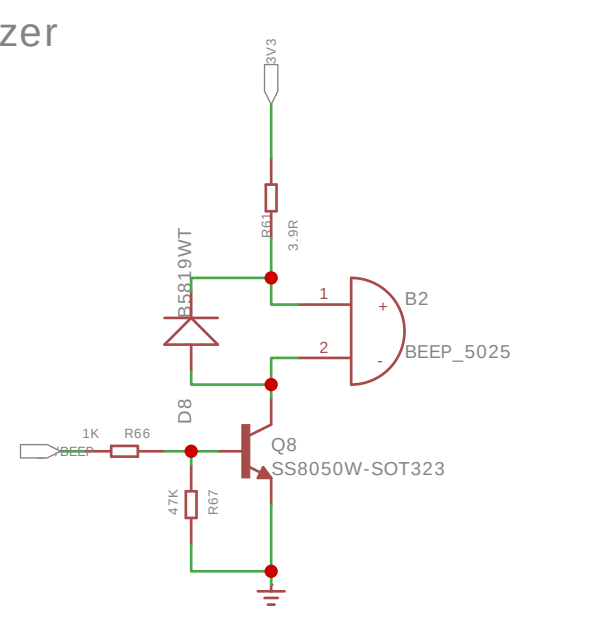


SD card

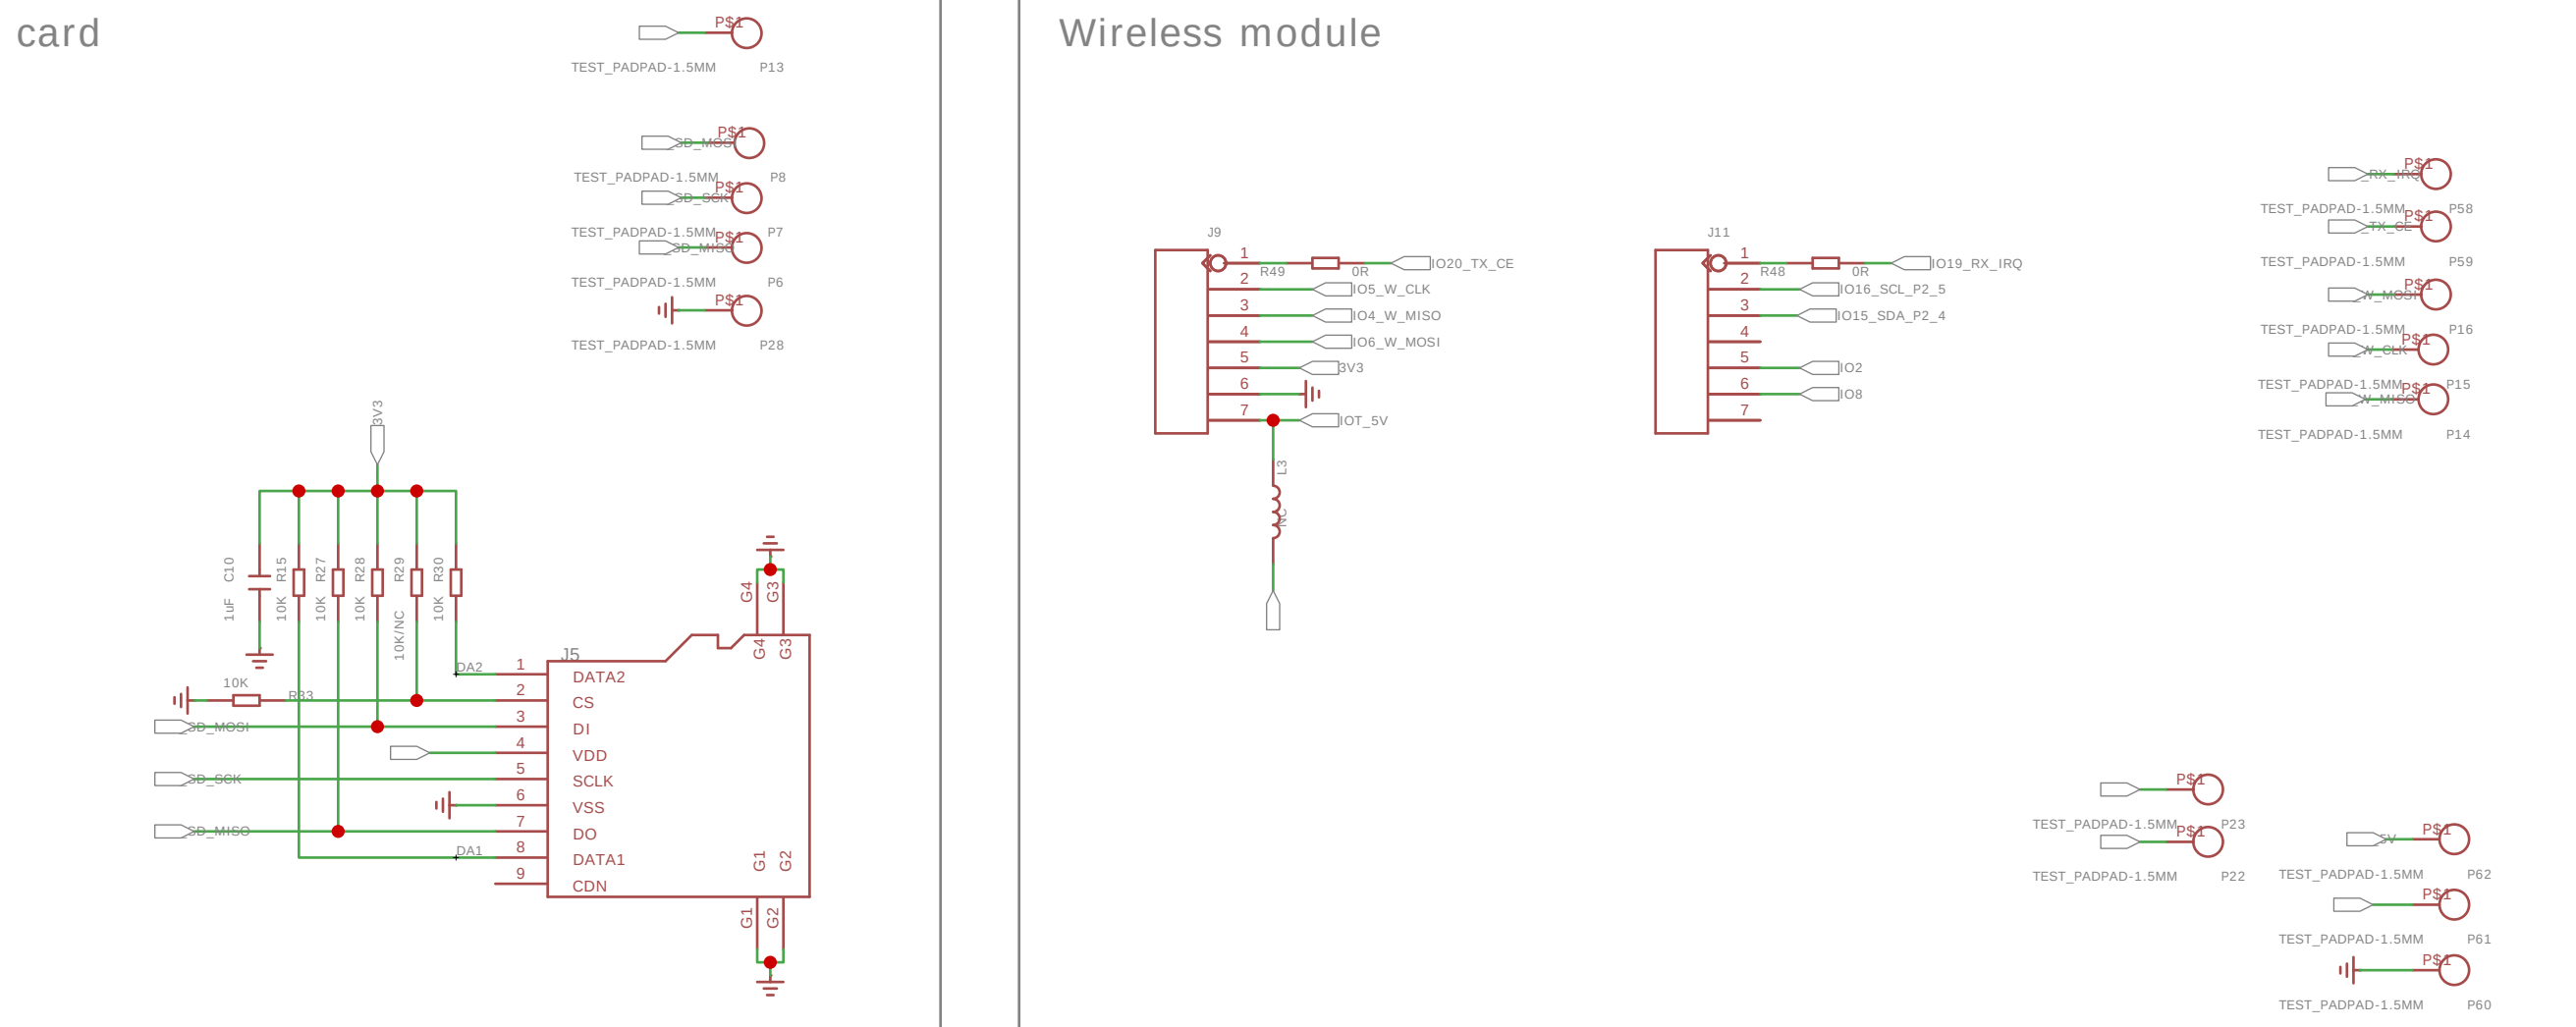

Wireless module

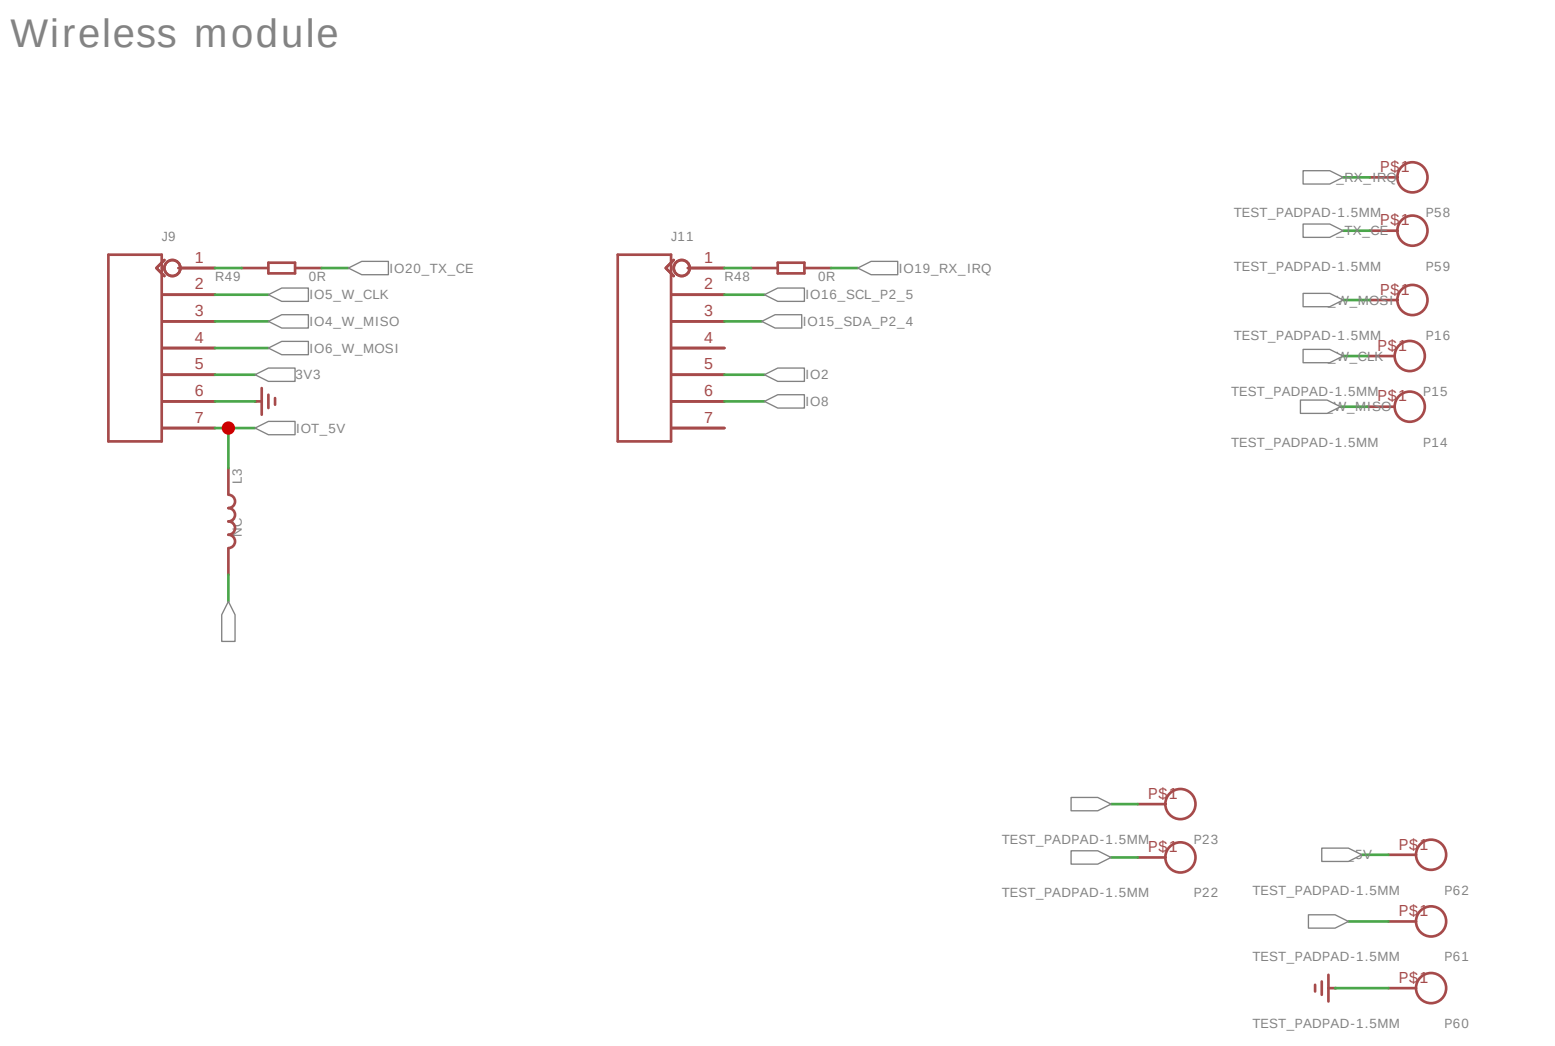


UART & I2C & GPIO extensions

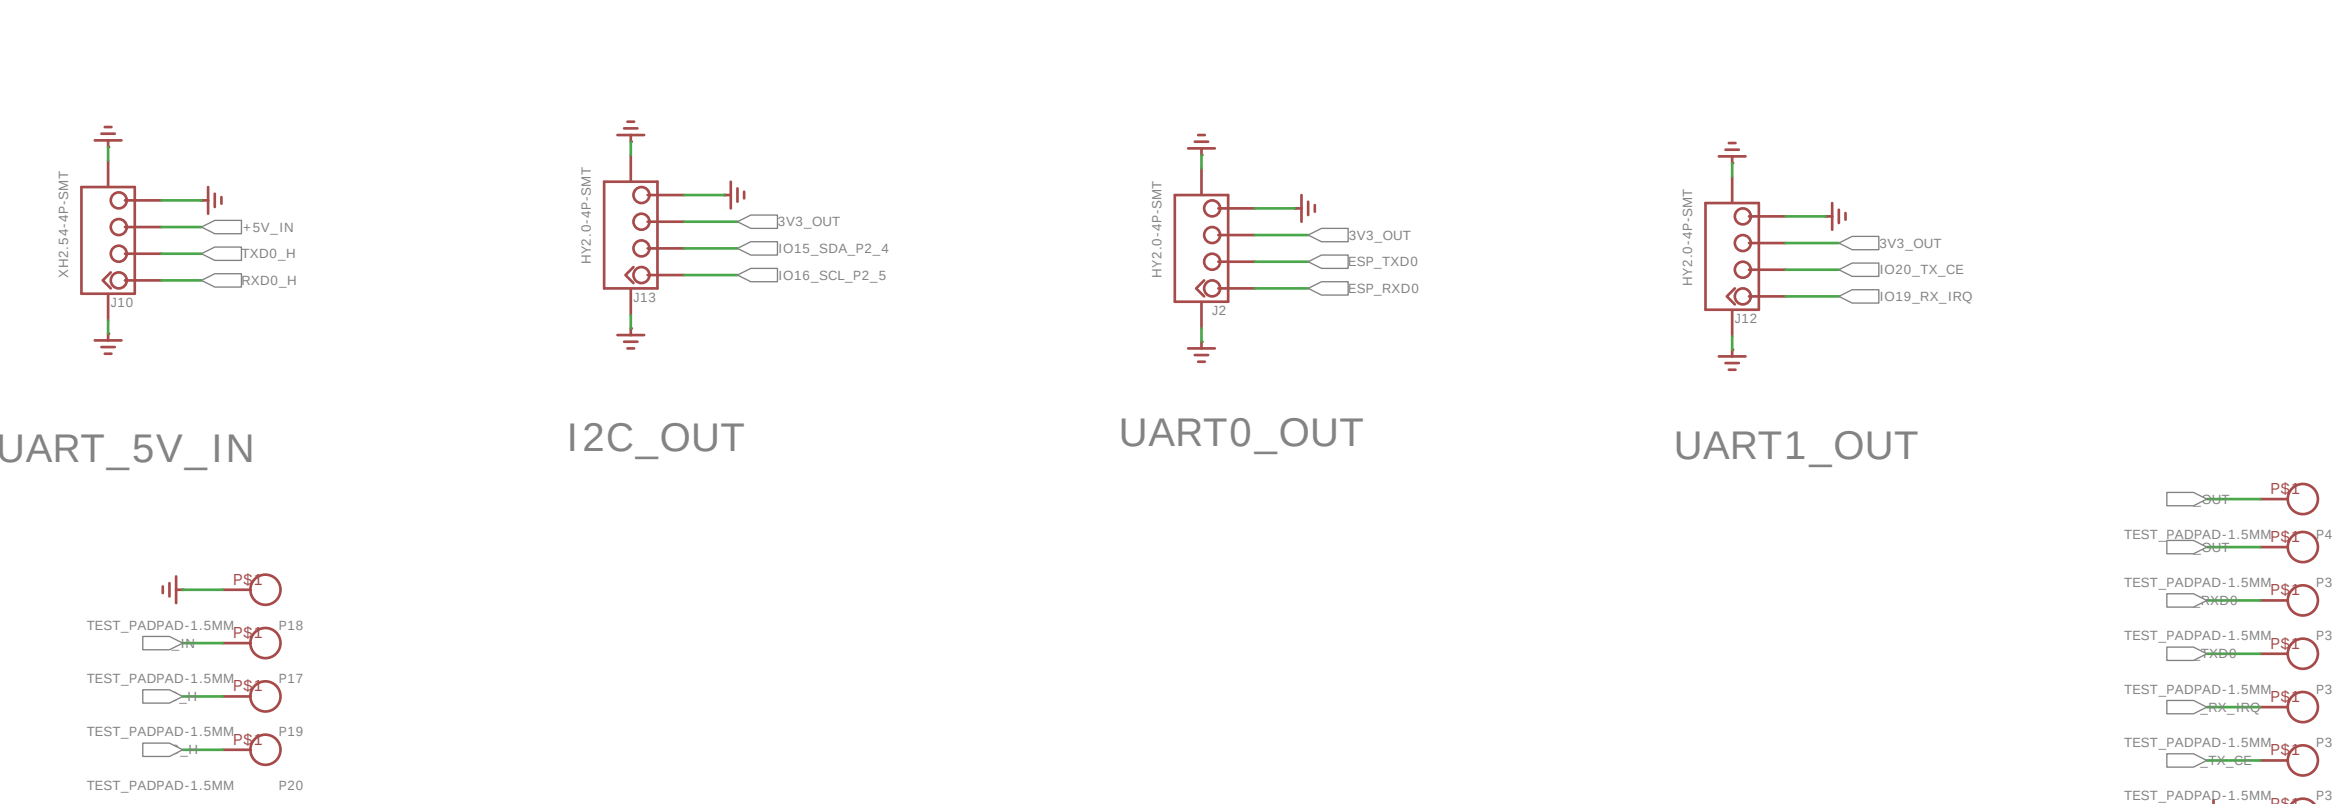


To use UART1_OUT, please switch S1 and S0 to 0 and 1


RTC

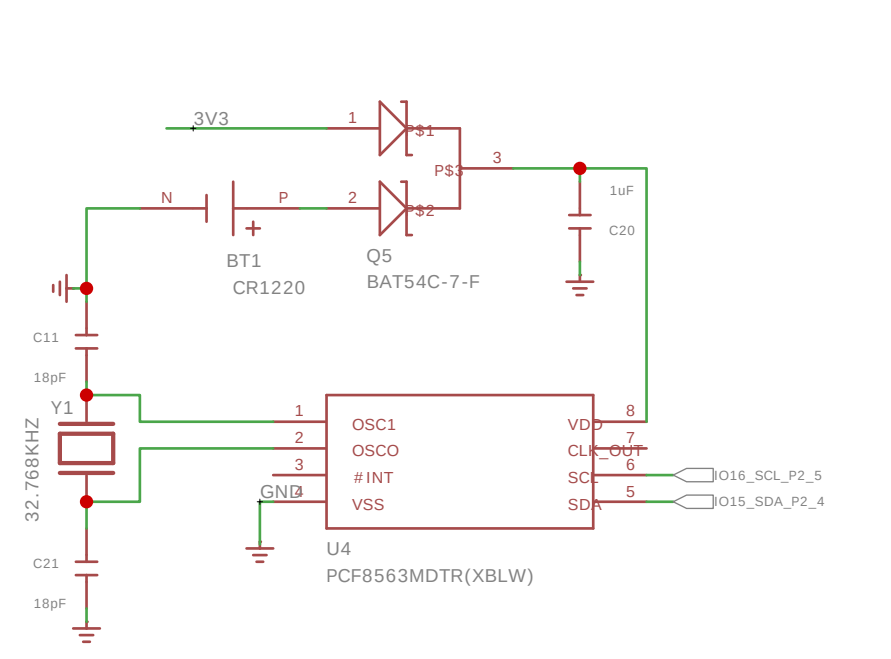



PDM MIC

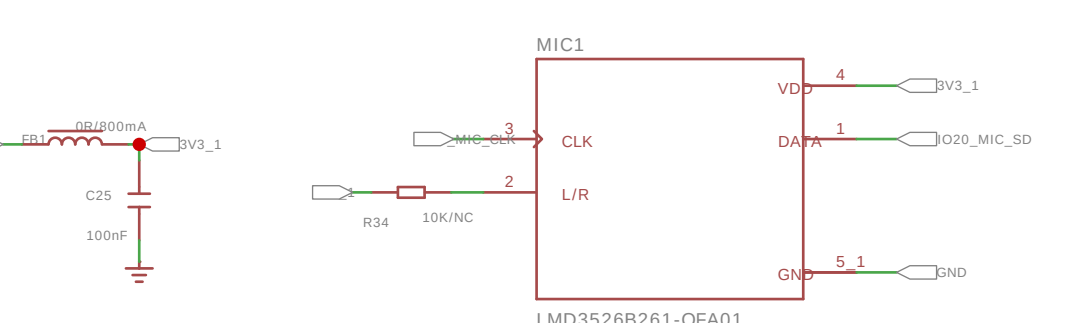

Power amplifier

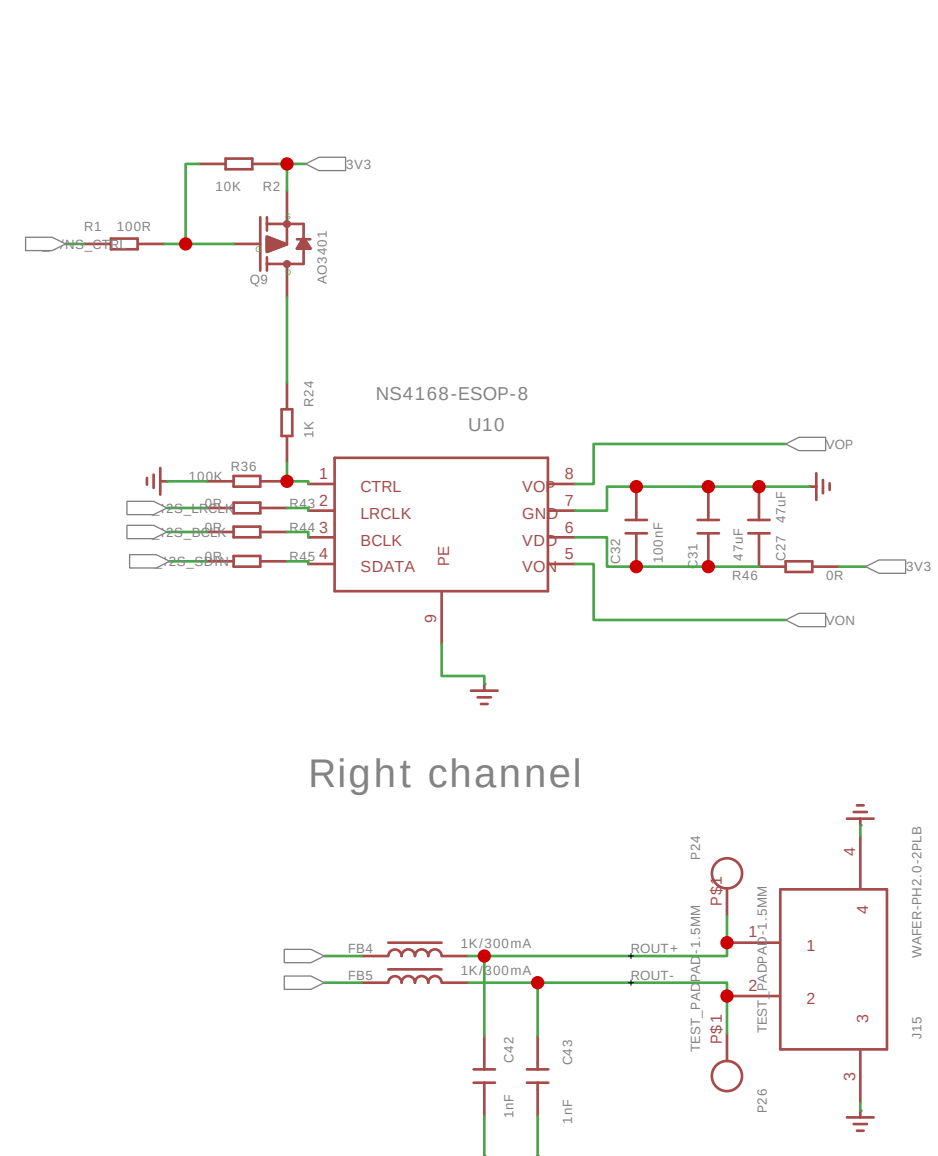


Right channel

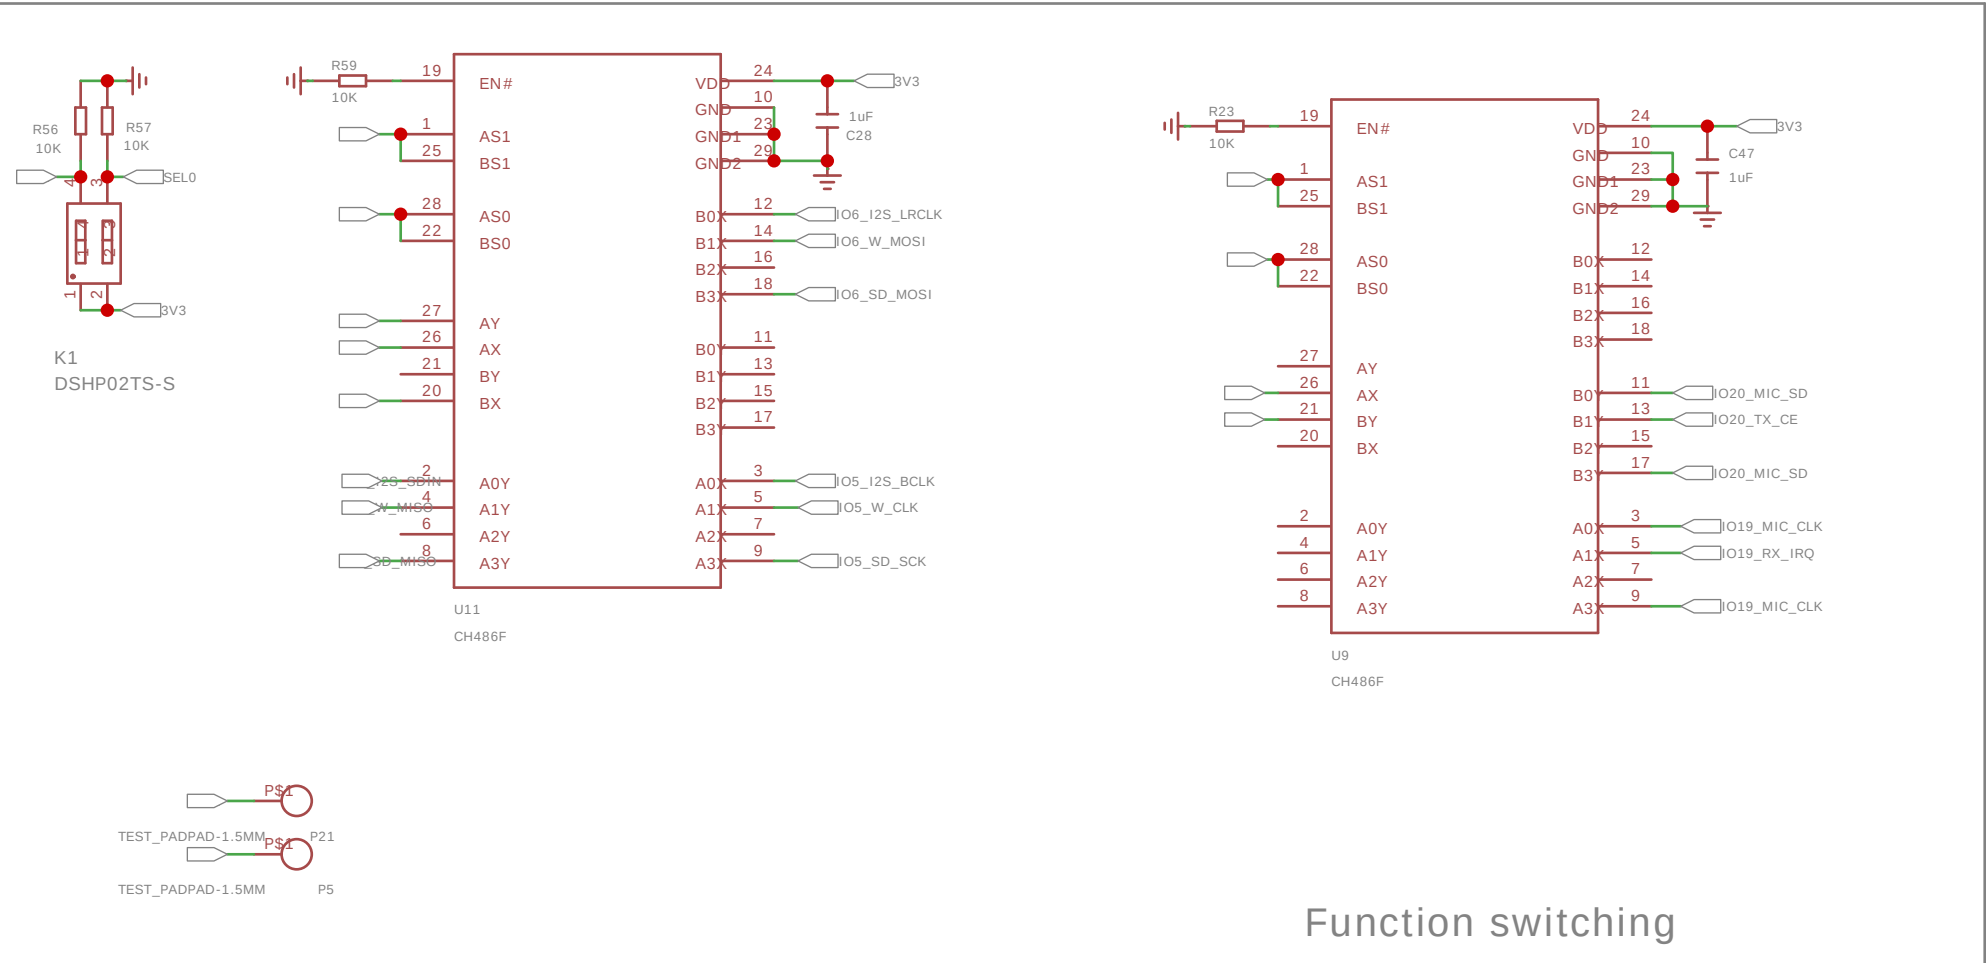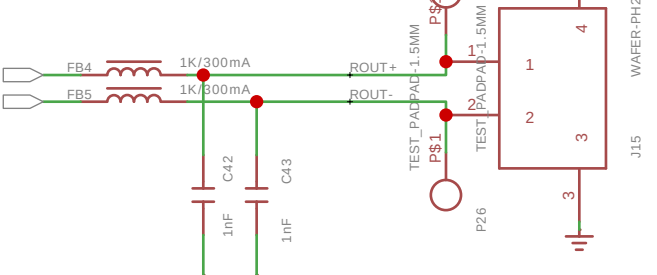

Function switching

To use UART1_OUT, please switch S1 and S0 to 0 and 1

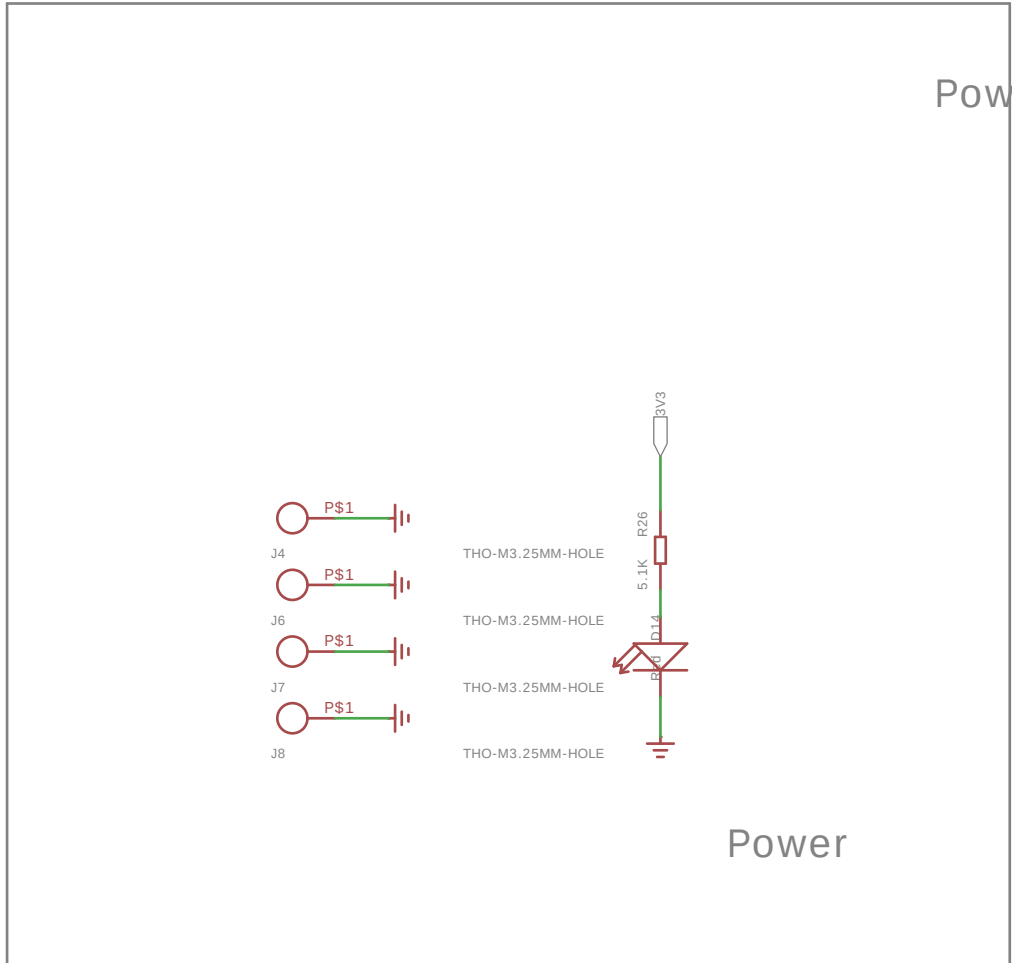

Power indicator and mounting hole

Power

V1.4