



PZ7035FH PZ7045-FH PZ7100-FH PLATFORM

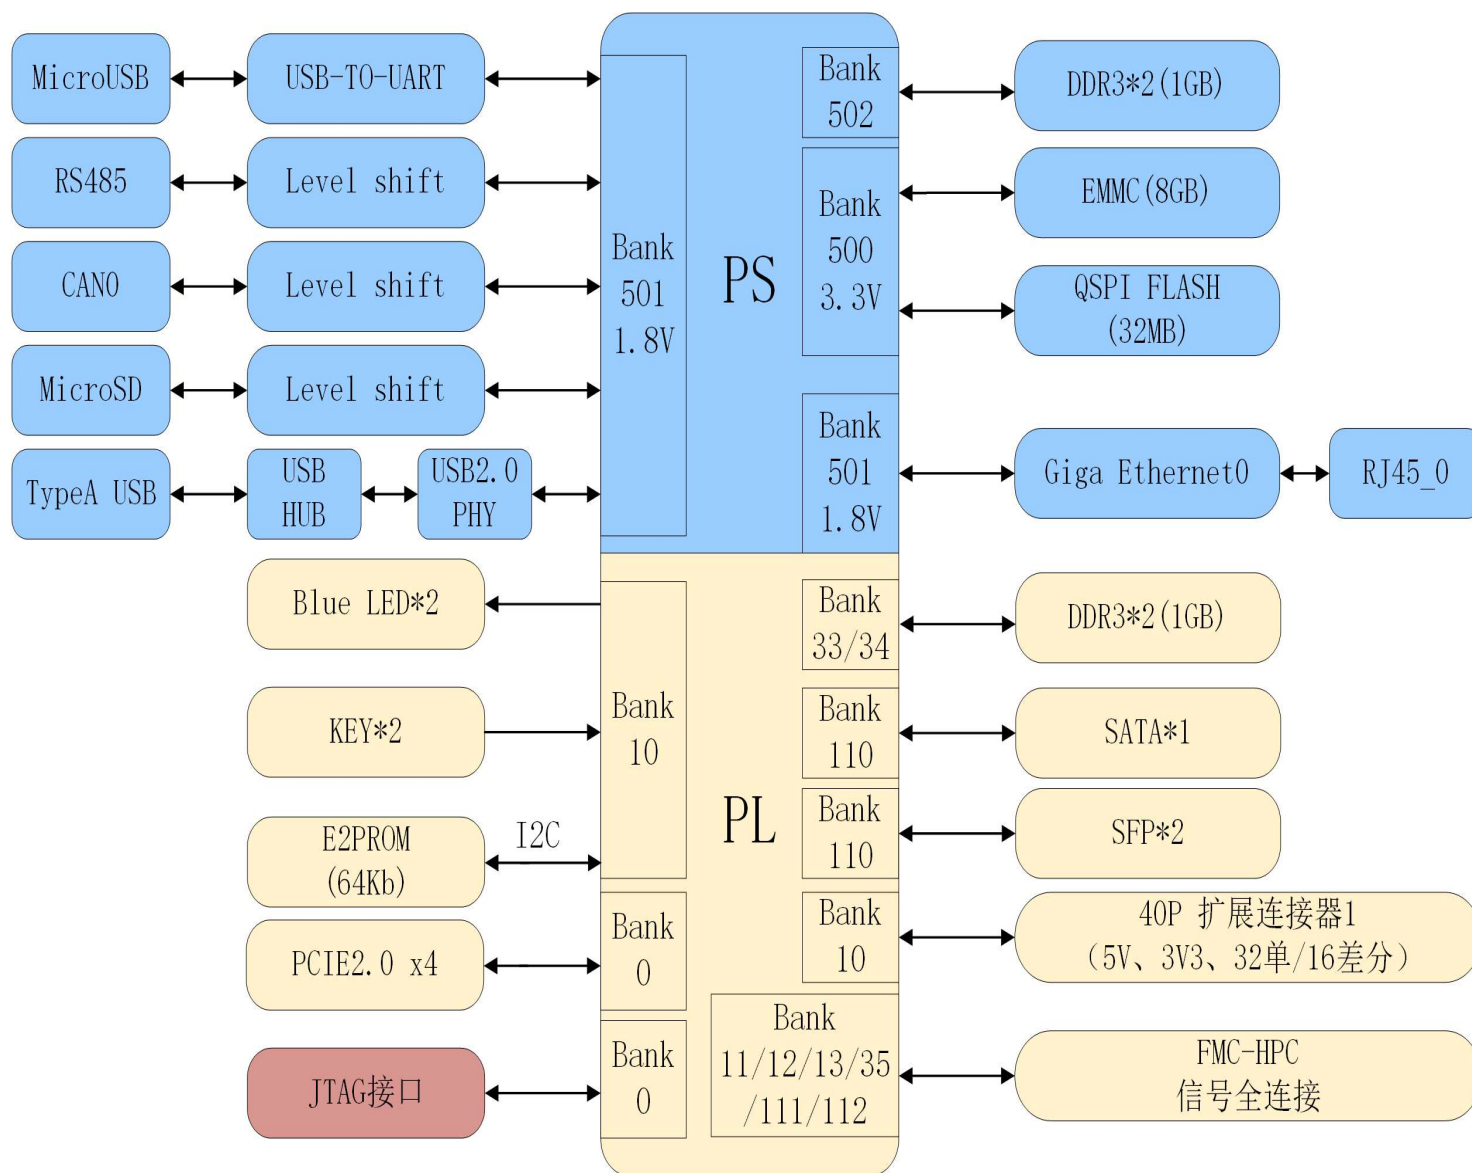


- 01.BLOCK
- 02.CORE INTERFACE1
- 03.CORE INTERFACE2
- 04.POWER
- 05.JTAG&FAN&nRST
- 06.USB TO UART
- 07.RS485&CAN
- 08.SD CARD
- 09.USB2.0 OTG
- 10.USB HUB x4
- 11.GIGA ETH(PS)
- 12.LED&KEY
- 13.E2PROM
- 14.PCIE X4
- 15.SATA INTERFACE
- 16.SFP X2
- 17.40P CON
- 18.FMC-HPC

Power of cord board is 7V--12V

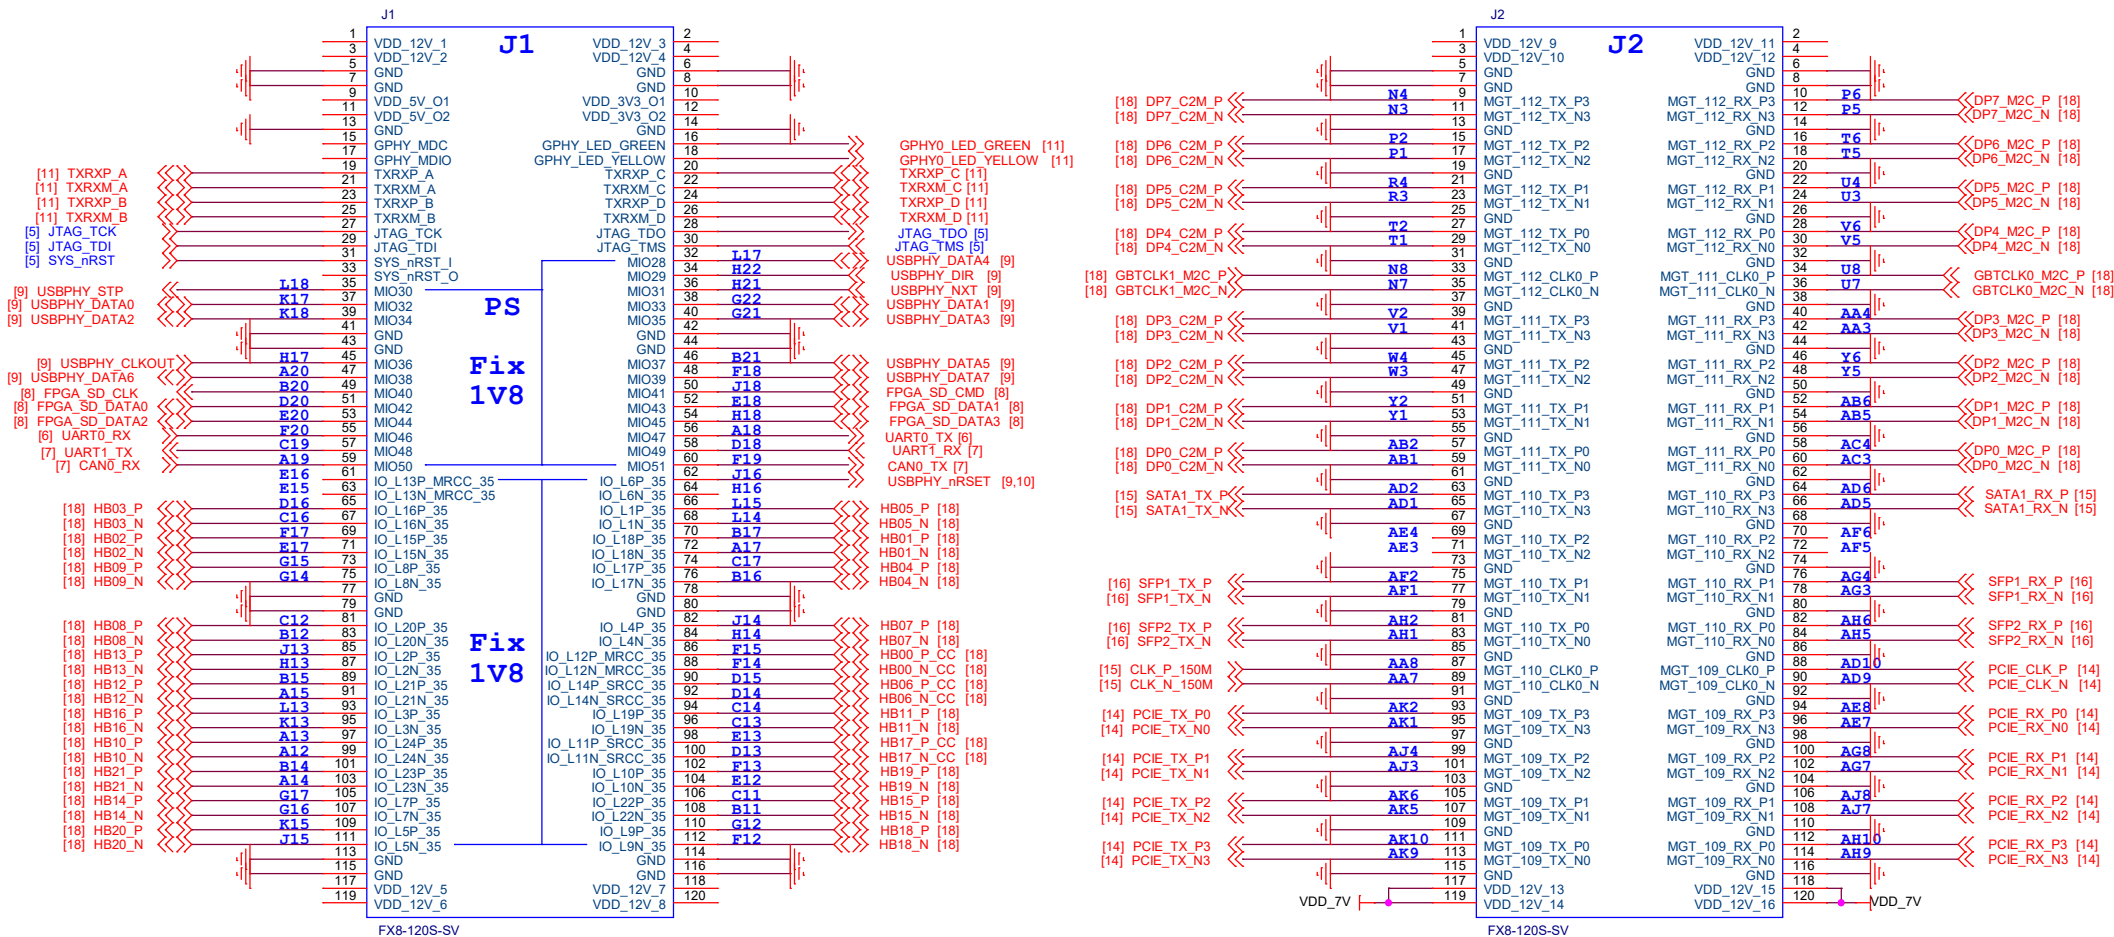


Power of cord board is 7V--12V

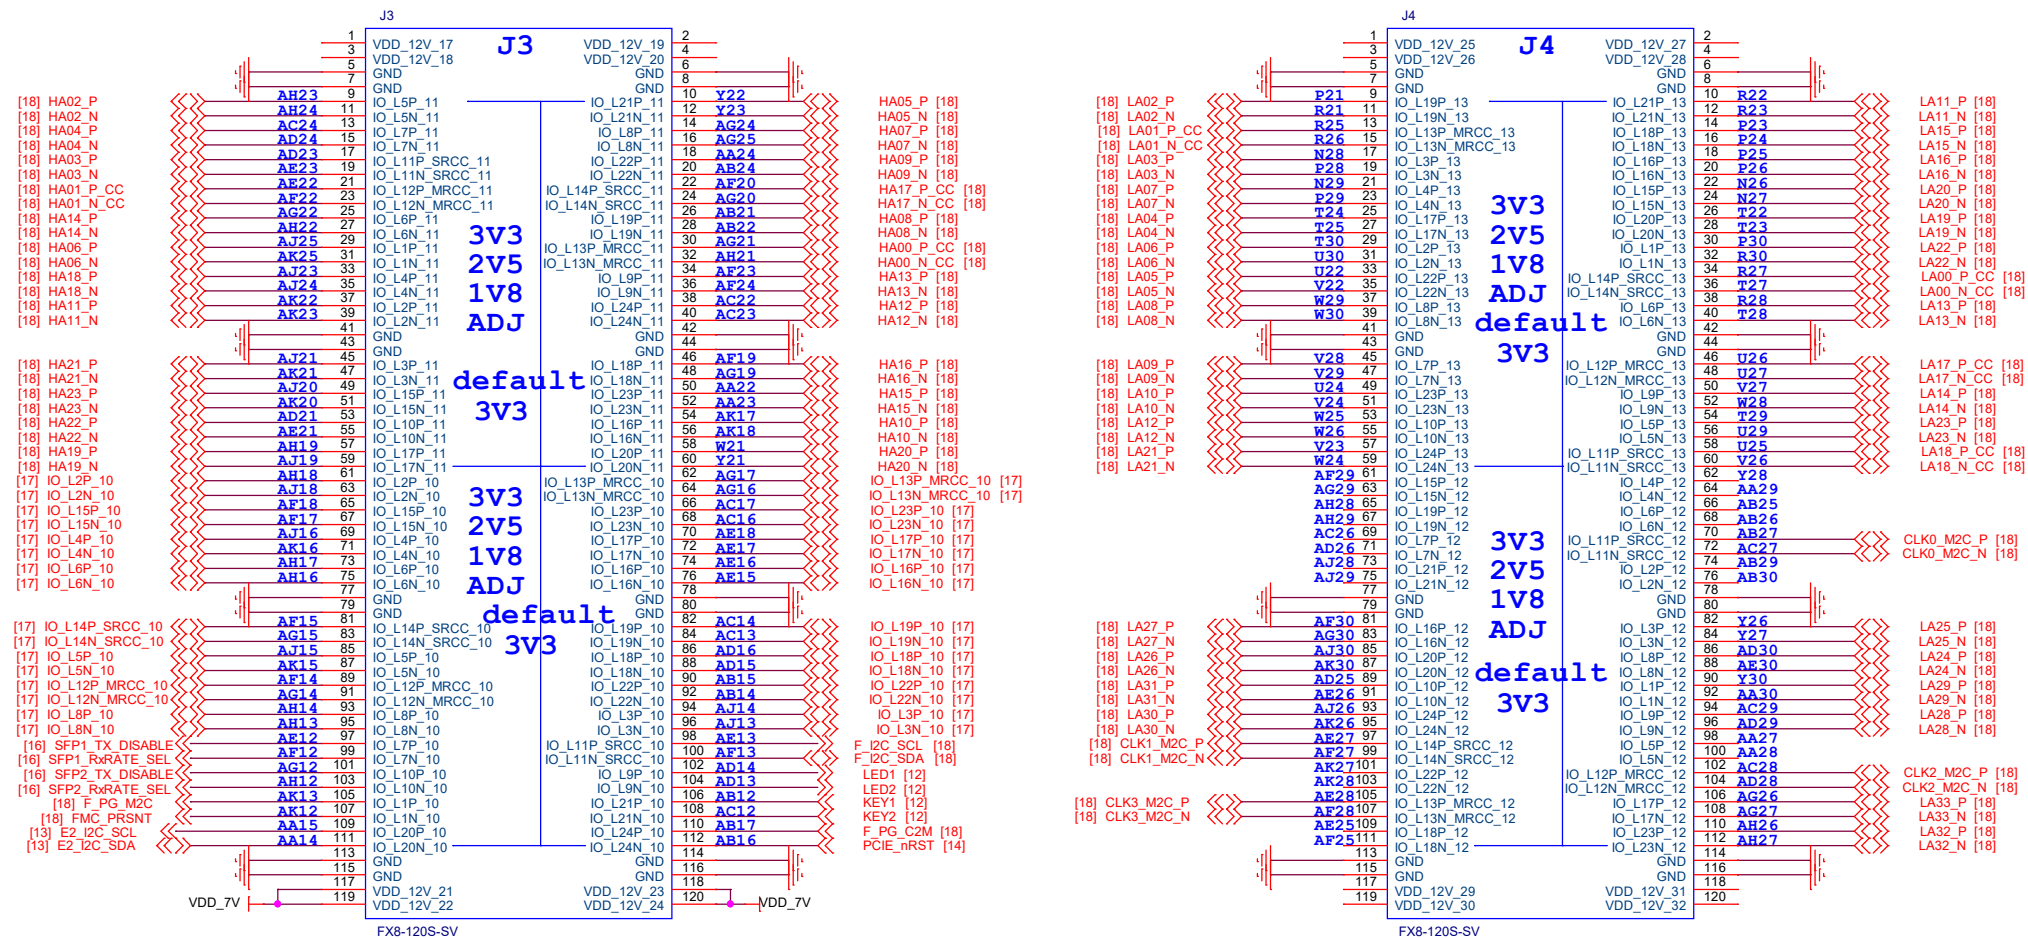


FMC-HPC :
CHANGE BANK11/12/13 3.3V TO 1.8V


12V power input

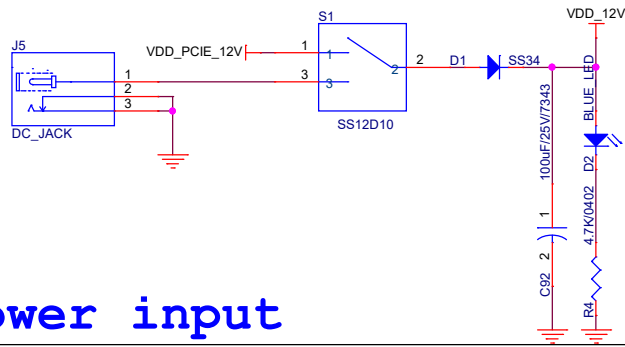


8V power

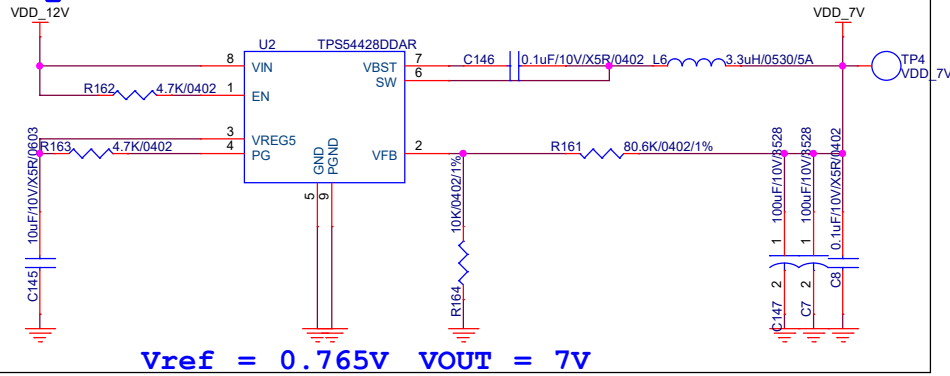


5V power

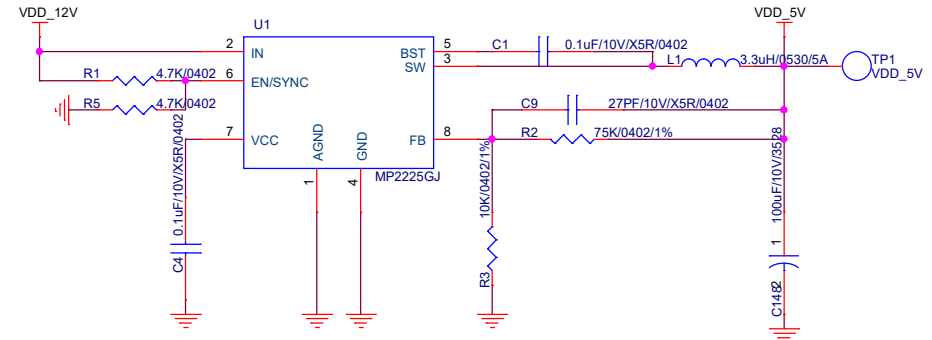

3.3V power

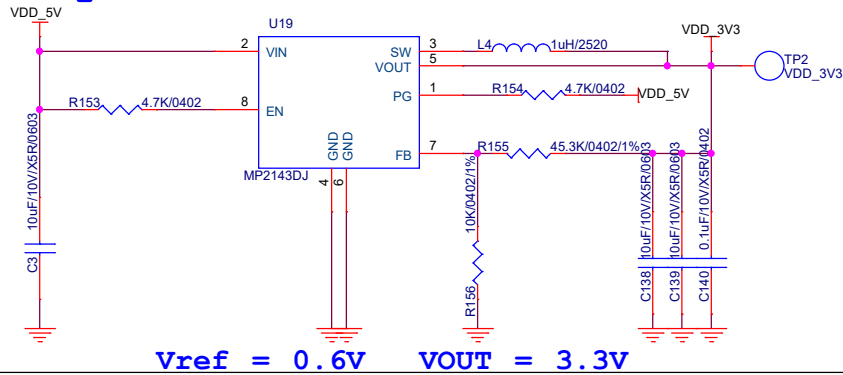


1.8V power

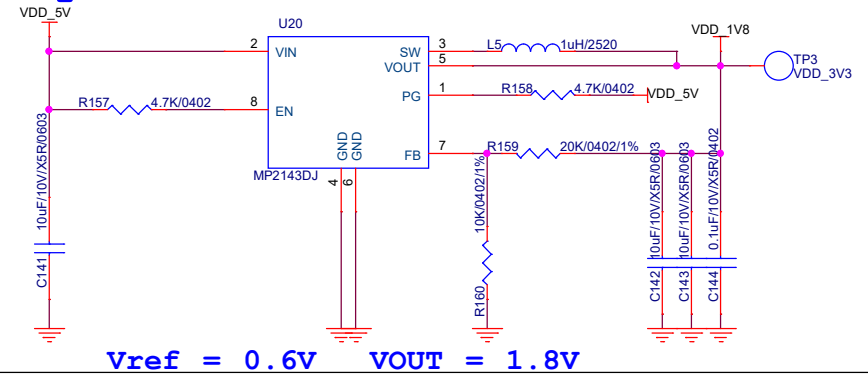


www.puzhitech.com

Title				
PZ7035-FH/PZ7045-FH/PZ7100-FH-POWER				
Size	Document Number			Rev
B	瑞致电子科技有限公司 (上海) 有限公司			V1.0
Puzhi Electronic Technology (Shanghai) Co., Ltd				
Date:	Saturday, June 10, 2023		Sheet	4 of 18


JTAG

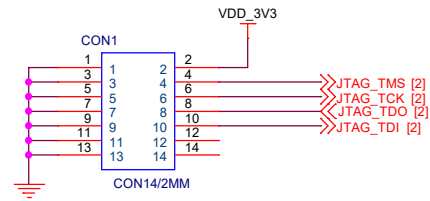


SYS nRST

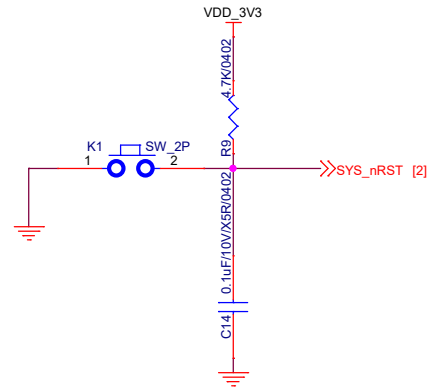


FAN CTRL

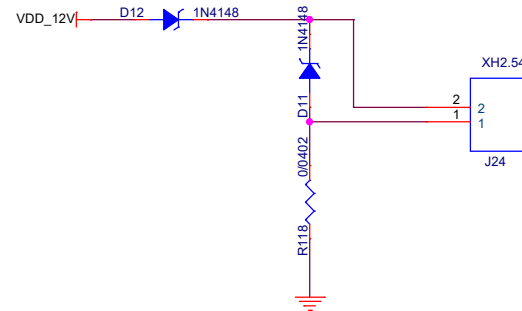


MOUNTING HOLES

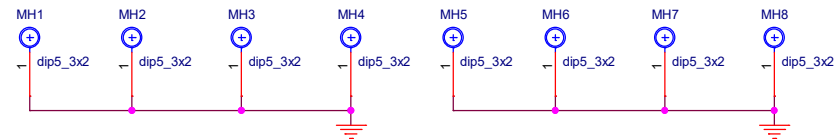


USB TO UART

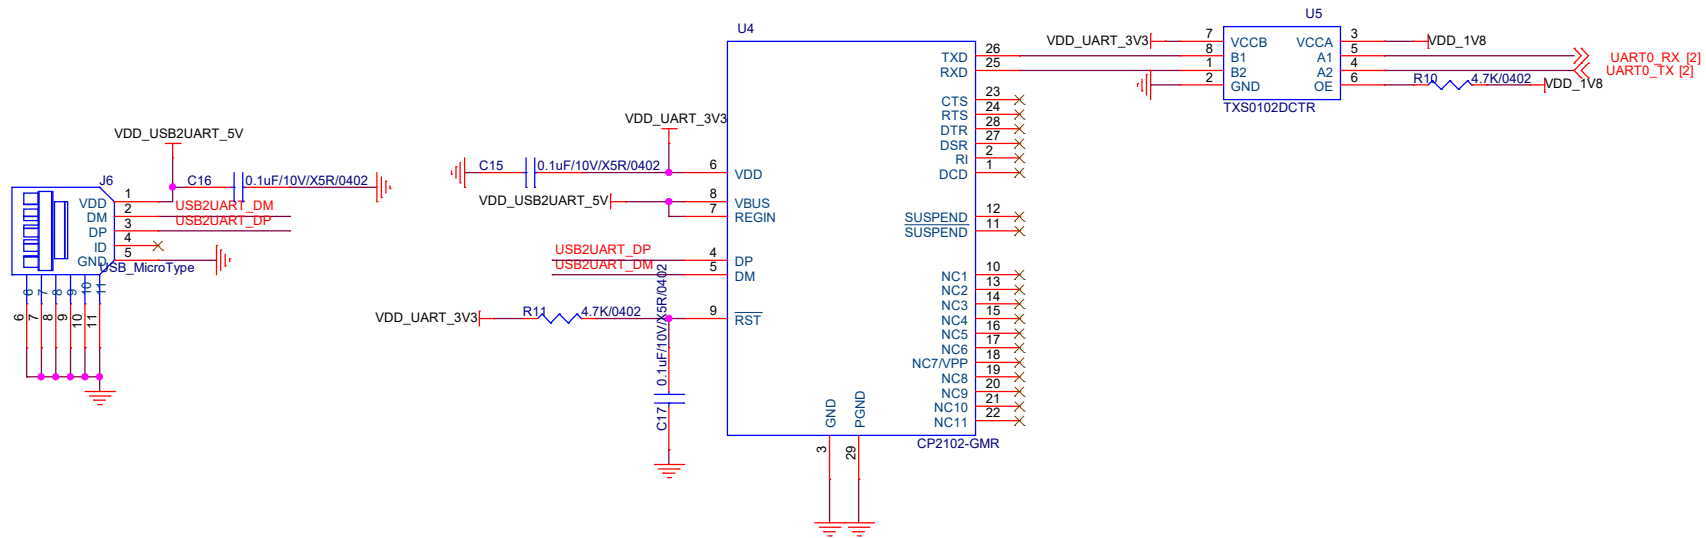


RS485

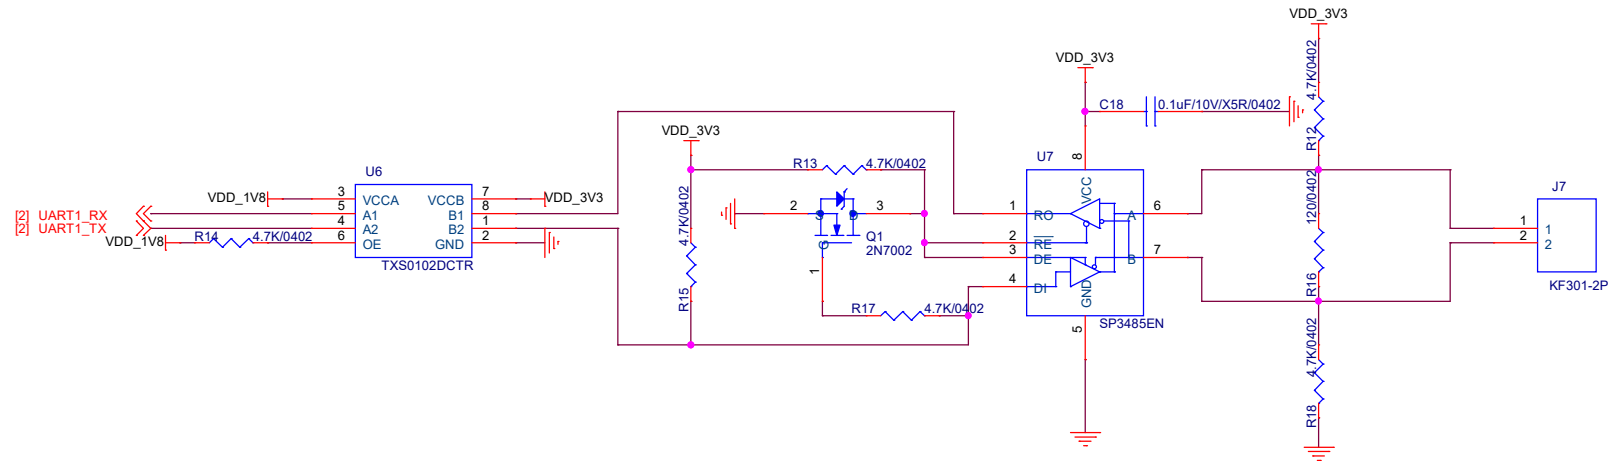


CAN

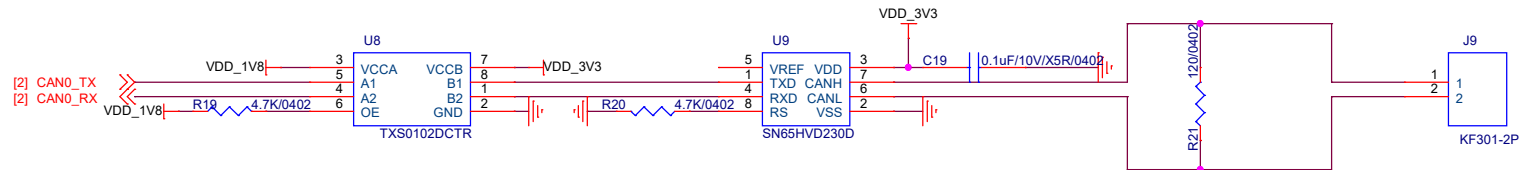

SD Card

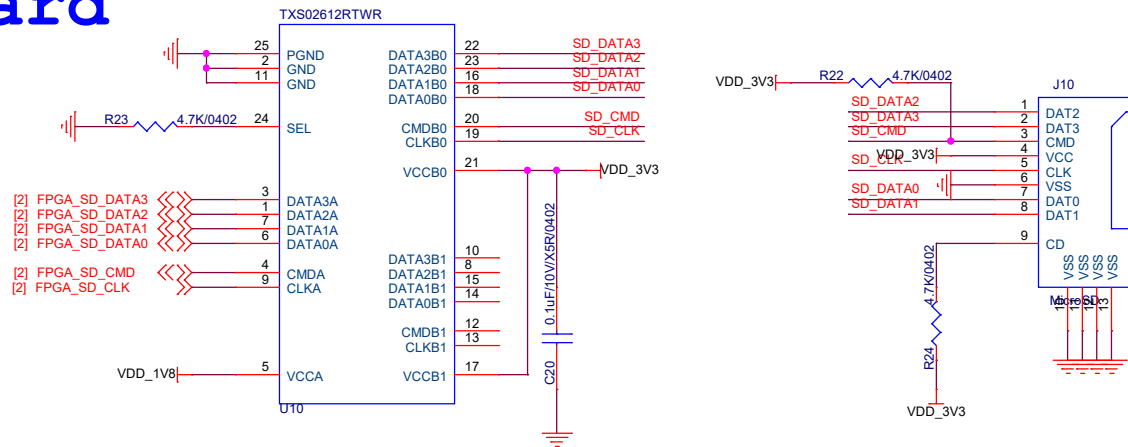


USB2.0 PHY OTG mode

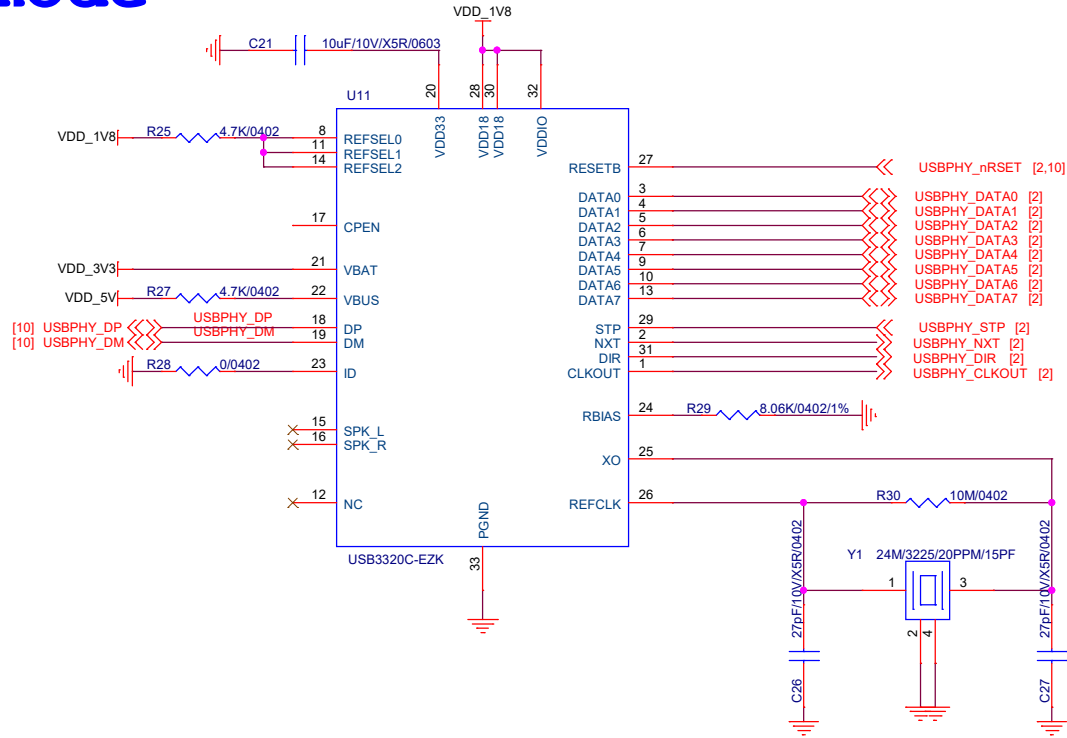


Configuration Pins			Description
REFSEL[2]	REFSEL[1]	REFSEL[0]	Reference Frequency
0	0	0	52 MHz
0	0	1	38.4 MHz
0	1	0	12 MHz
0	1	1	27 MHz
1	0	0	13 MHz
1	0	1	19.2 MHz
1	1	0	26 MHz
1	1	1	24 MHz


USB2.0 HUB

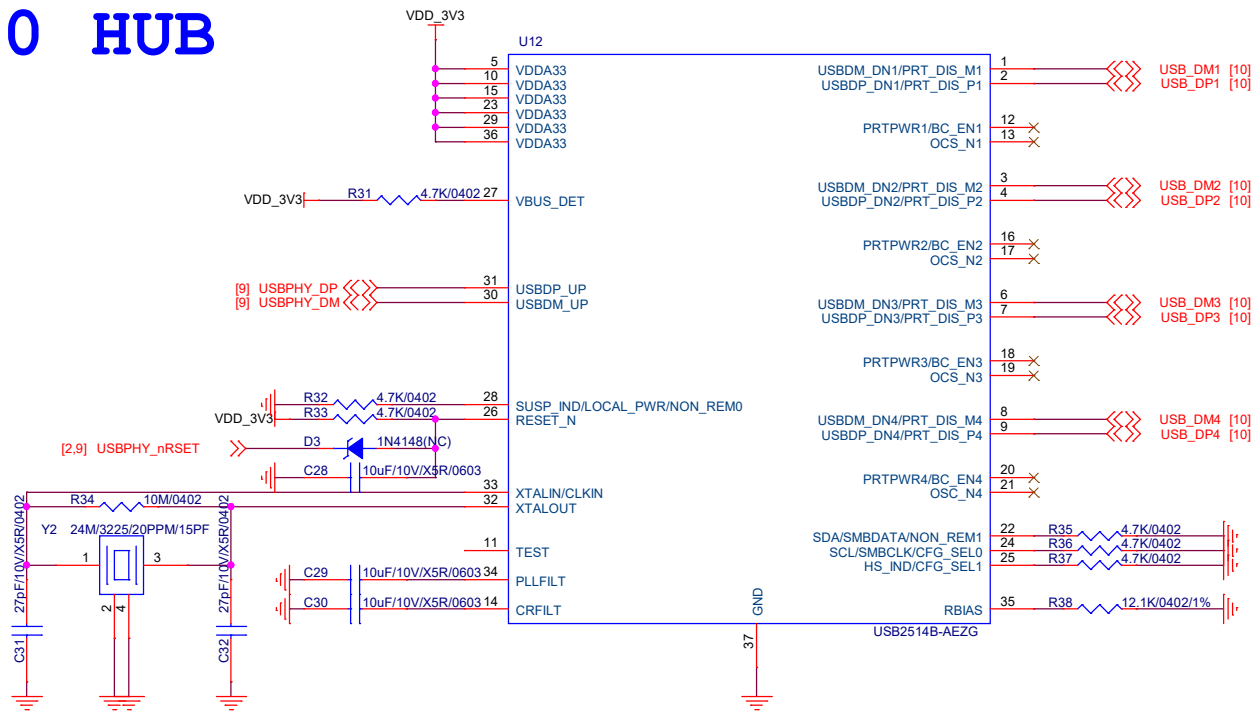


USB2.0 Type-A

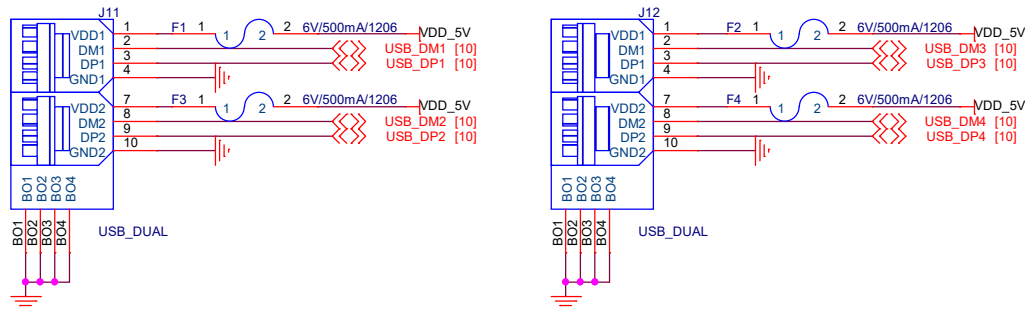


Giga Eth (PS)

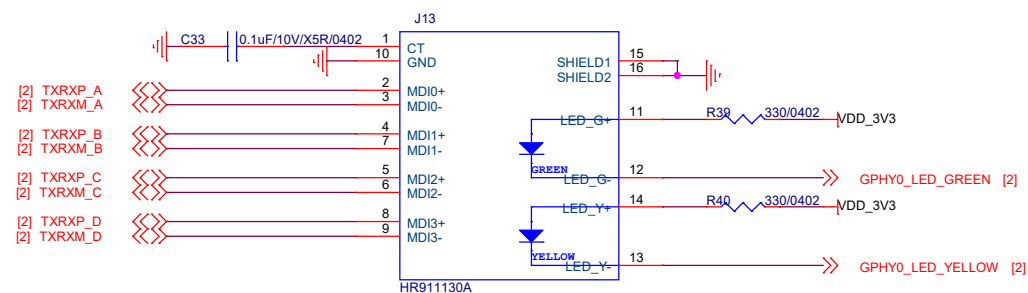

LED




KEY

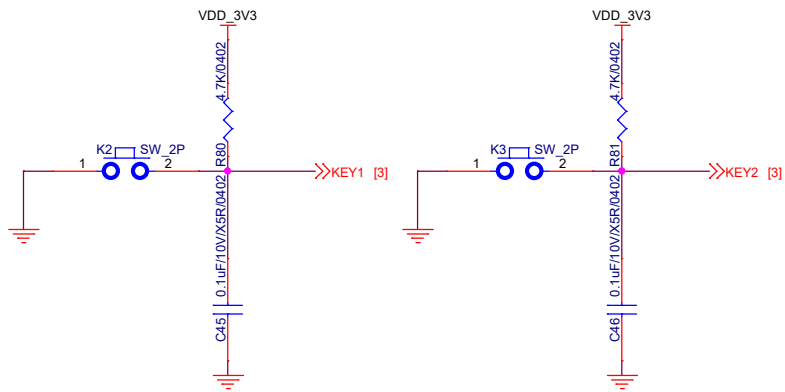

		www.puzhitech.com	
Title		PZ7035-FH/PZ7045-FH/PZ7100-FH-LED&KEY	
Size B		Document Number	Rev V1.0
Date:		Puzhi Electronic Technology (Shanghai) Co., Ltd	
Sunday, May 14, 2023		Sheet 12	of 18


E2PROM

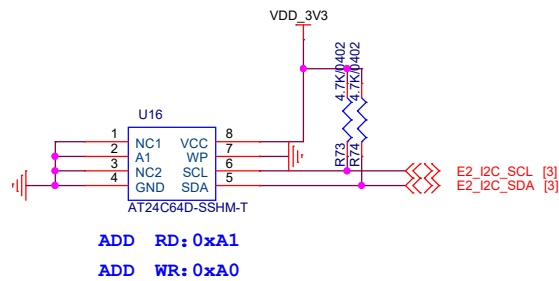


www.puzhitech.com

Title			PZ7035-FH/PZ7045-FH/PZ7100-FH-E2PROM
Size B	Document Number		瑞致电子科技 (上海) 有限公司
	Puzhi Electronic Technology (Shanghai) Co., Ltd		Rev V1.0
Date:		Sunday, May 14, 2023	Sheet 13 of 18


PCIE 2.0 X4

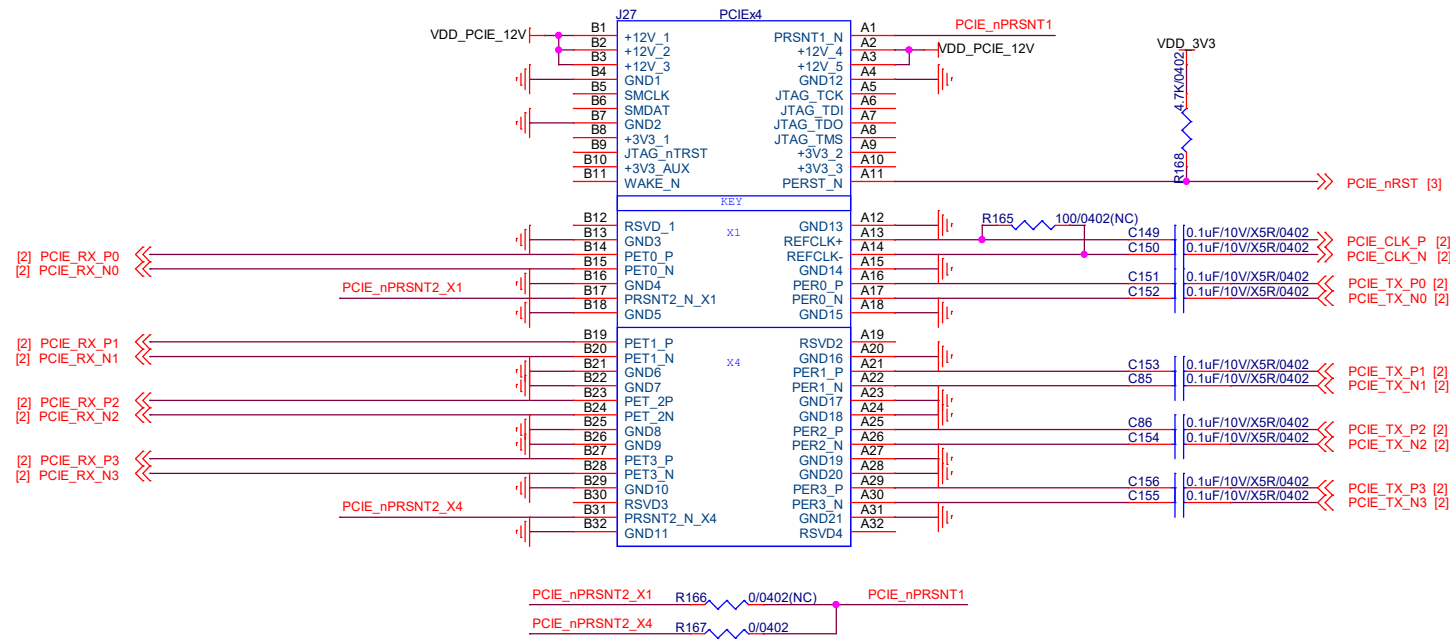

SATA

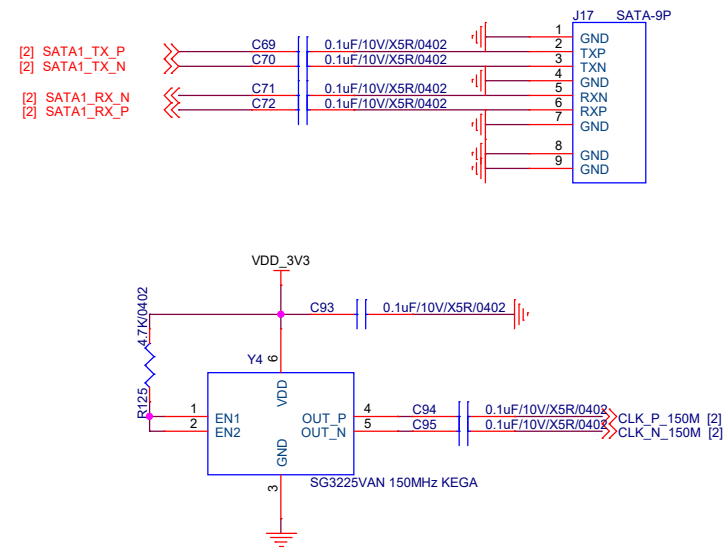

SFPx4

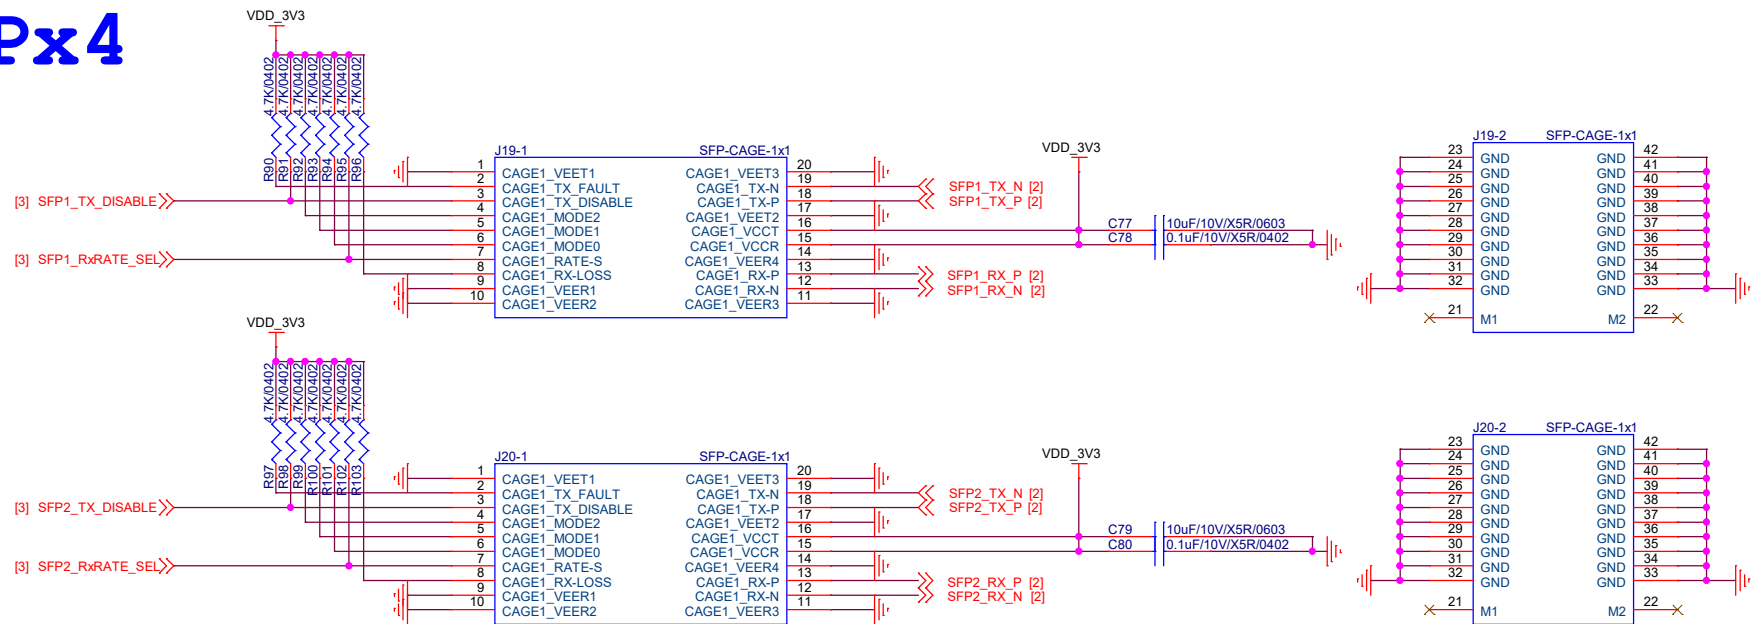

40P CON

