


MX460





- change Log:
 - New for v2.6 01/23/2010 v26 B
 - v2.6 White silk screen
 - v2.6 Silk screen corrections (PortE)
 - v2.6 Removed pull-up resistor pads
 - v2.6 Changed to crystal from RC oscillator
 - v2.6 Added 32KHz crystal pads
 - v2.6 Clarified port labels in schematic
 - v2.6 Updated library to use latest SparkFun
 - v2.6 D1 now 1A CDBM140-G diode

licenced under Creative Commons v3.0 Attribution licence

Do Not Populate

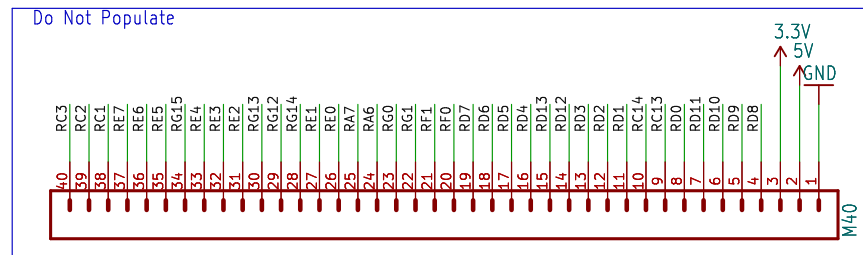


Do Not Populate

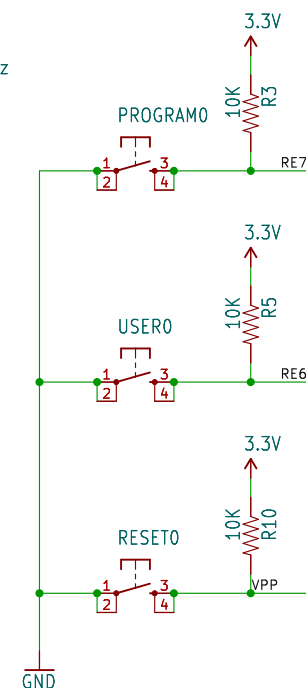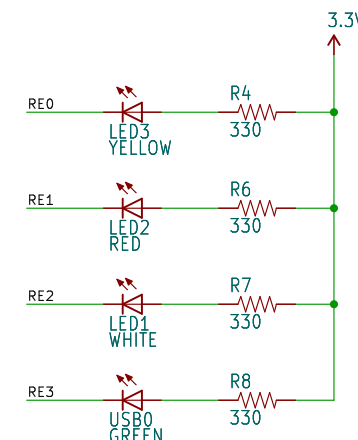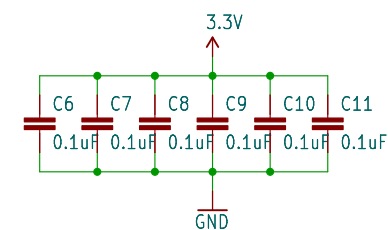


335


1/1




USB Function (Mini B)



Do Not Populate

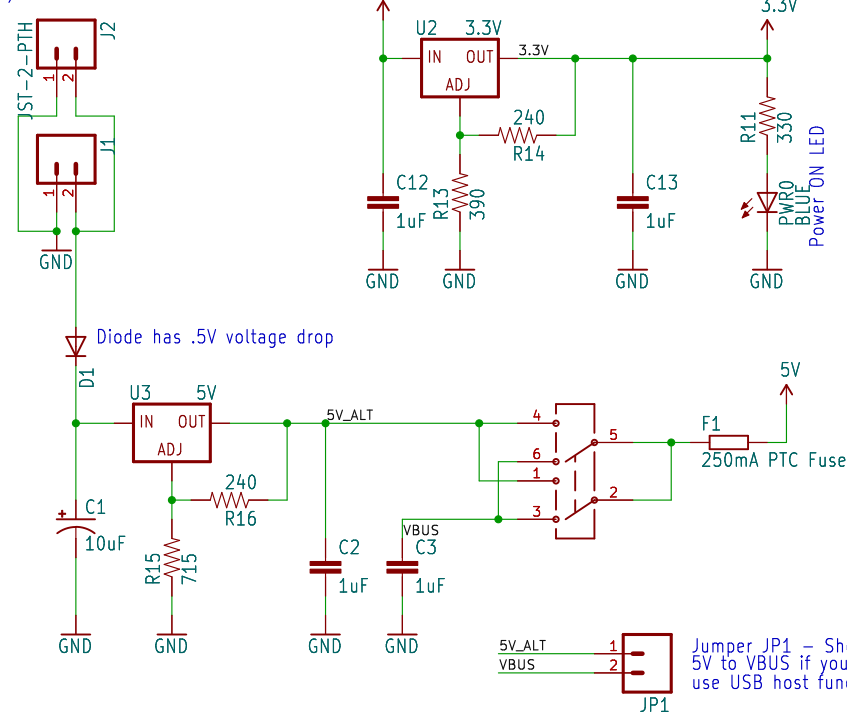

Jumper JP1 – Short to apply 5V to VBUS if you want to use USB host functionality

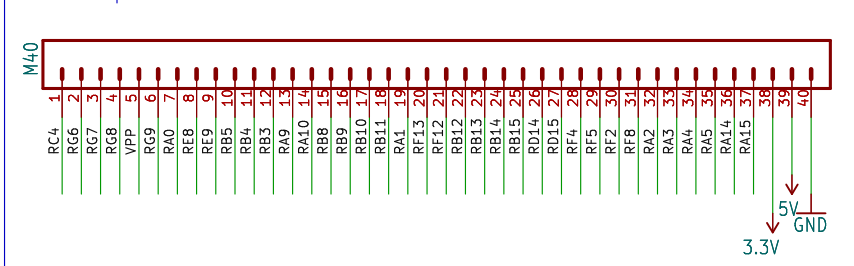[illegible]