




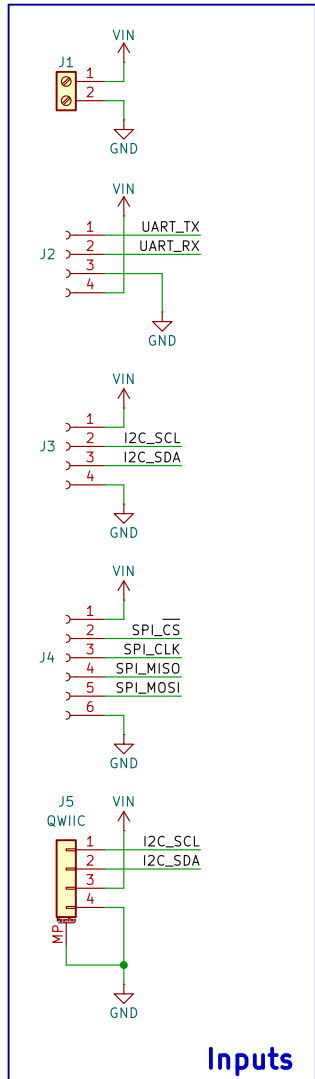


Inputs

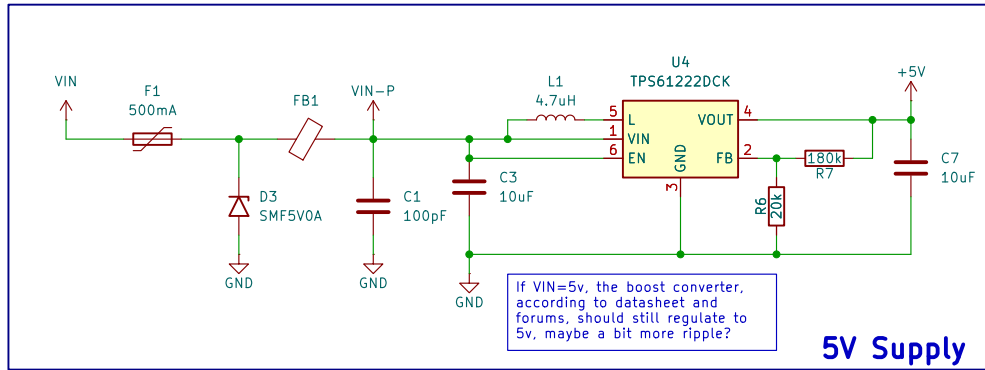


5V Supply

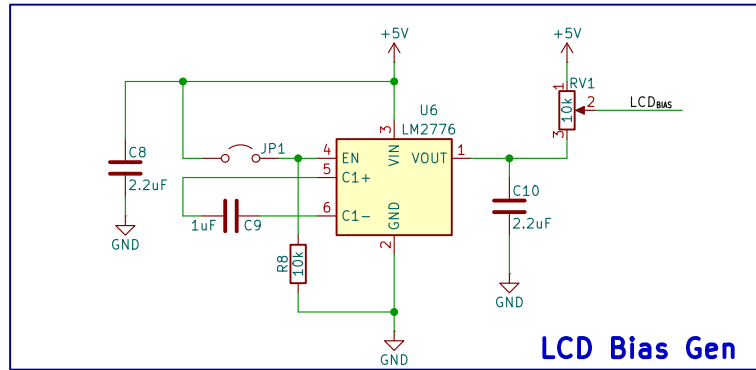


LCD Bias Gen

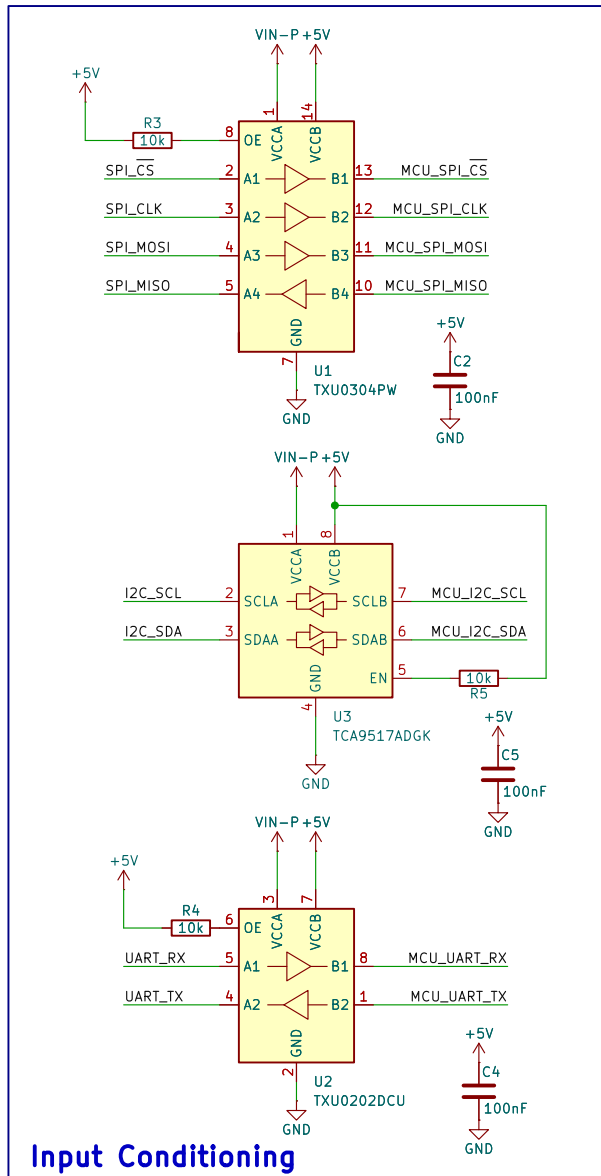


Input Conditioning

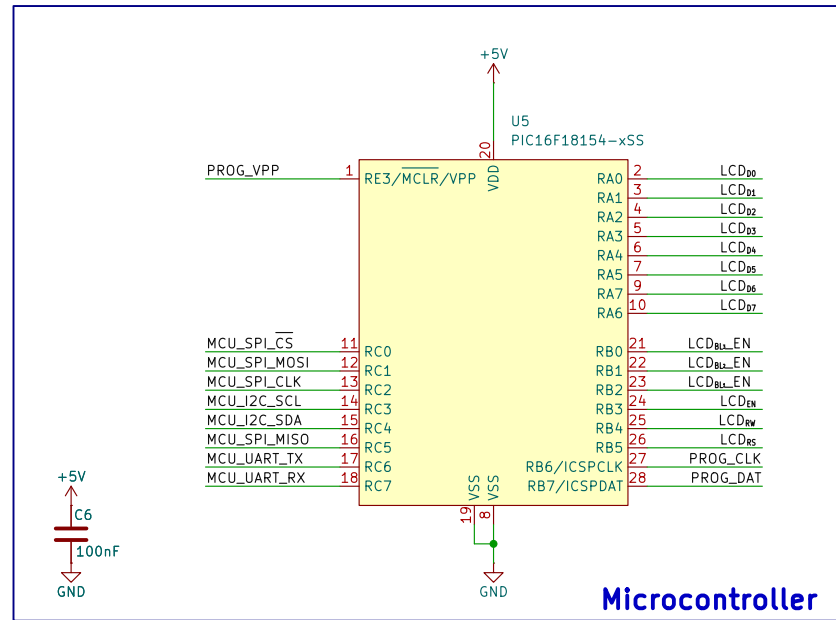


Microcontroller

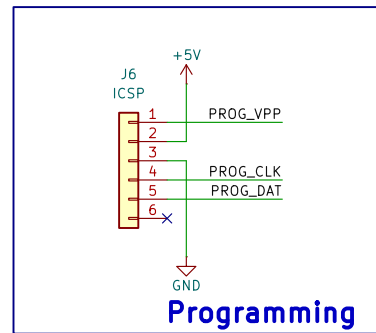


Programming

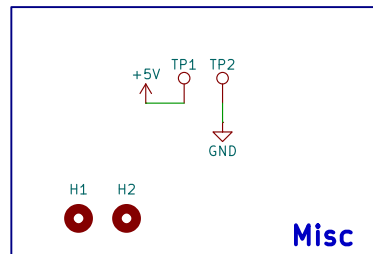


Misc

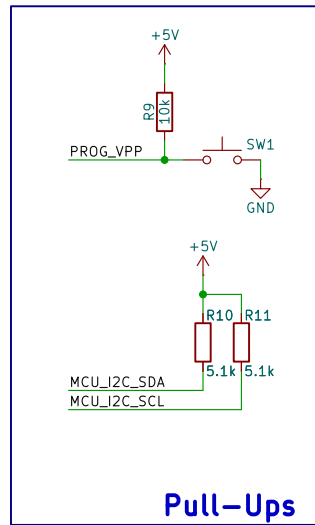


Pull-Ups

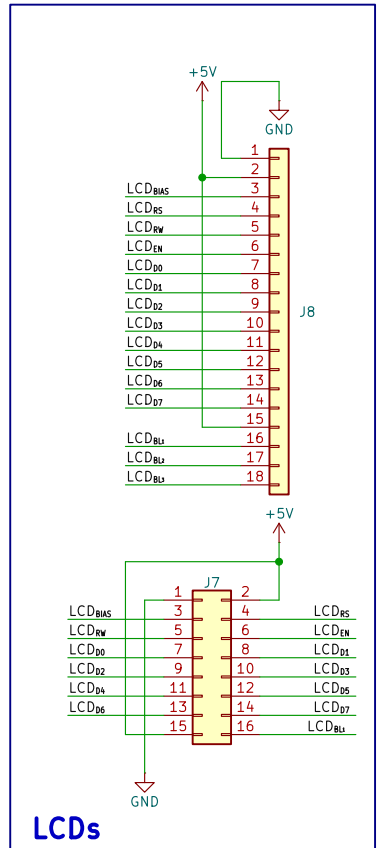


LCDs

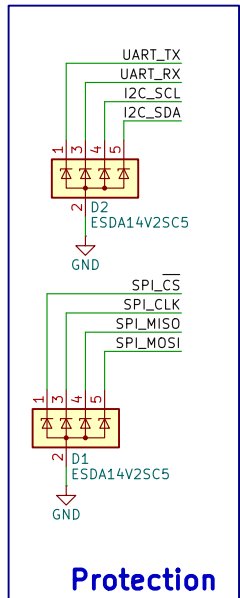

Protection

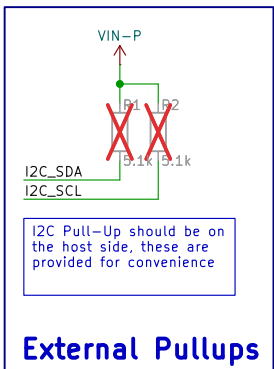

External Pullups

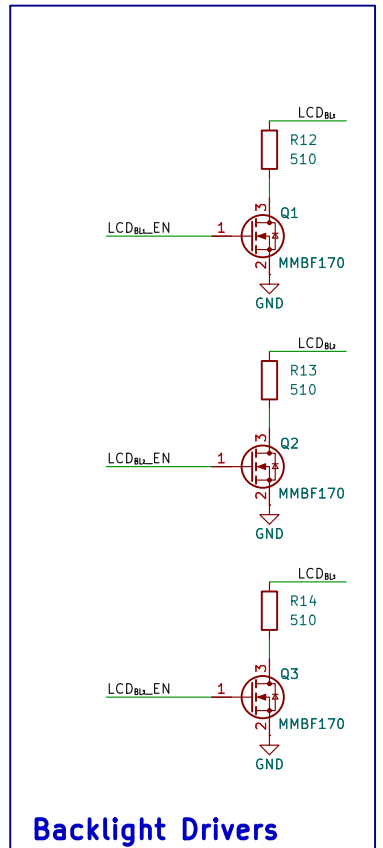

Backlight Drivers

Jumper Notes:
JP1 – Populate to enable negative charge-pump

NOTES:
– Unless otherwise noted, all resistors and capacitors are 0805, 1%, 16V max
– UART's TX/RX terminology is from the POV of the MCU, so TX is transmit out of the MCU and thus this backpack



Universal LCD Backpack