

1 USB-C 5 V INPUT (power only) + PROTECTION



2 3.3 V SUPPLY (MCU + RADIO + OLED)

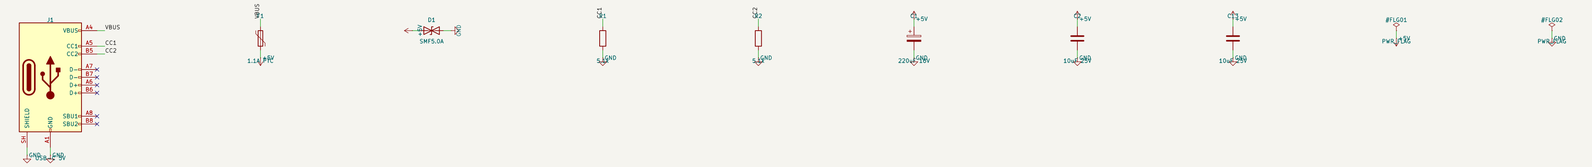


3 ATMEGA328P-AU (8 MHz crystal, 3.3 V)

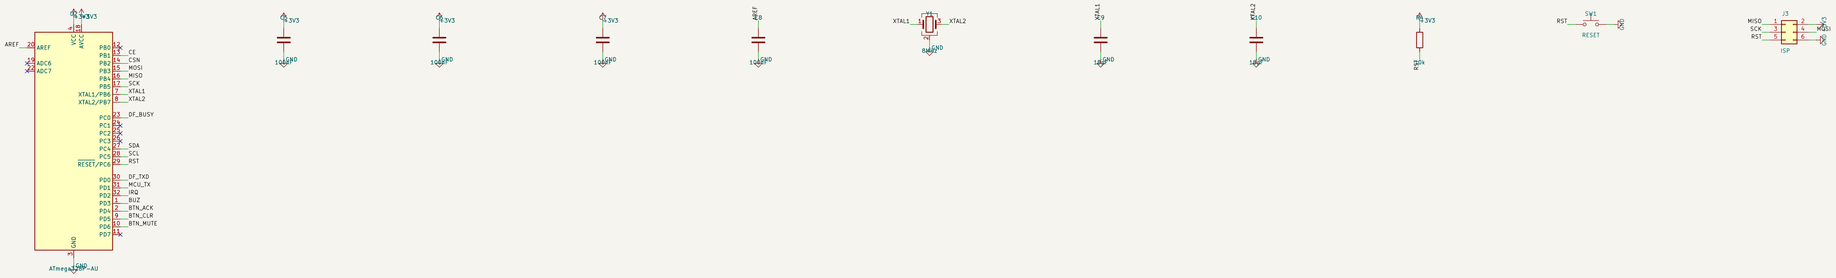

4 SI24R1 RADIO MODULE




5 OLED + BUTTONS



6 AUDIO: DFPLAYER MINI + SPEAKER + BUZZER



7 TEST POINTS + MOUNTING



Generated by hardware/tools/gen_schematic.py from receiver_design.py
5V USB-C in, 3.3V LDO for MCU/radio/OLED. DFPlayer Mini on 5V

ElectroIoT

Sheet: /
File: BellReceiver.kicad_sch

Title: Restaurant Calling Bell – Counter Receiver (ATmega328P + SI24R1 +

Size: A1	Date: 2026-10-29	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1