
1 BATTERY (fit ONE: CR2450 holder or 2xAAA wires)



2 ATMEGA328P-AU (4 MHz internal RC, CKDIV8 fuse + runtime /2)

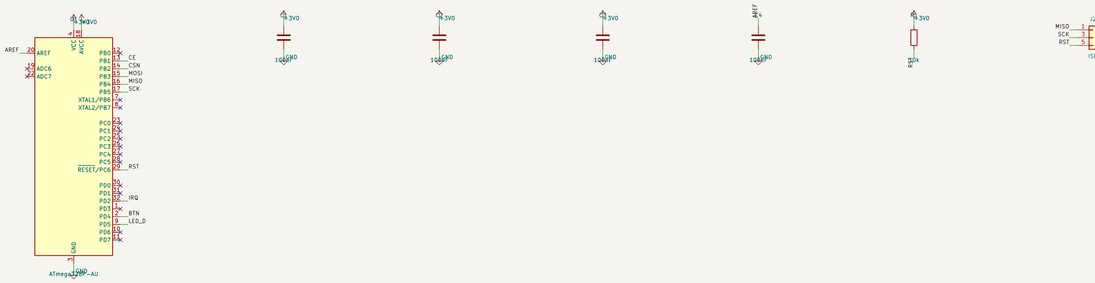

3 SI24R1 RADIO MODULE (HC-24L01-M style, 8 half-holes)

4 CALL BUTTON + STATUS LED

5 TEST POINTS + MOUNTING

Generated by hardware/tools/gen_schematic.py from remote_design.py
CR2450 or 2xAAA direct supply, no regulator, 4 MHz ATmega328P

ElectroIoT

Sheet: /
File: BellRemote.kicad_sch

Title: Restaurant Calling Bell – Table Remote (ATmega328P + SI24R1)

Size: A1 — Date: 2026-10-29	**Rev: A**
KiCad E.D.A. 10.0.6	Id: 1/1