



University of Minho
School of Engineering
Electronics Engineering department
Embedded systems

Project: Report

Marketing Digital Outdoor with gesture interaction — Analysis

Group 8
José Pires A50178
Hugo Freitas A88258

Supervised by:
Professor Tiago Gomes
Professor Ricardo Roriz
Professor Sérgio Pereira

December 23, 2021

Contents

Contents	i
List of Figures	iii
List of Tables	v
List of Listings	vi
List of Abbreviations	vii
1 Design	1
1.1 Hardware specification	1
1.1.1 Architecture	1
1.1.2 Main Controller	1
1.1.3 Motion Detection	3
1.1.4 Fragrance Diffusion Actuator	4
1.1.5 Camera	5
1.1.6 LCD Display	6
1.1.7 Speakers	6
1.1.8 Power Supply	7
1.1.9 On/Off button	8
1.1.10 Total Hardware (HW) cost	8
1.2 Hardware interfaces definition	9
1.2.1 Peripherals Mapping	9
1.2.2 Test Cases	10
1.2.3 Printed Circuit Board (PCB) Design	10
1.3 Software specification	11
1.3.1 Software architecture	13

Contents

1.3.2	Deployment specification	18
1.3.3	Database design	19
1.3.4	Data formats	22
1.3.5	Static architecture – Class diagrams	22
1.3.6	Threads specification	23
1.3.7	Flowcharts	26
1.4	Software interfaces definition	29
1.5	Start-up/shutdown process specification	29
1.6	Error handling specification	29
1.7	Test cases	29
1.7.1	Remote Client	29
1.7.2	Remote Server	29
1.7.3	Local System	29
Bibliography		36
Appendices		45
A Project Planning – Gantt diagram		46

List of Figures

1.1	HW architecture Block Diagram	2
1.2	Raspberry Pi model 4B	3
1.3	HC-SR04 Pinout (withdrawn from [106])	4
1.4	Fragrance module (withdrawn from [107])	5
1.5	Camera module (withdrawn from [108])	5
1.6	Display (withdrawn from [109])	6
1.7	Display Interfaces (withdrawn from [109])	7
1.8	Speakers (withdrawn from [111])	7
1.9	Power Supply (withdrawn from [112])	8
1.10	Power Supply (withdrawn from [113])	9
1.11	Peripheral Mapping	10
1.12	PCB schematic	13
1.13	PCB layout	14
1.14	Software (SW) architecture: component diagram – Remote Client	15
1.15	SW architecture: component diagram – Remote Server	16
1.16	SW architecture: component diagram – Local system	17
1.17	Deployment diagram	20
1.18	Marketing Digital Outdoor (MDO) Entity-Relationship Diagram: conceptual design	21
1.19	Data formats	22
1.20	Class diagram: Remote Client	24
1.21	Class diagram: Remote Server	25
1.22	Class diagram: Local System – part 1/2	26
1.23	Class diagram: Local System – part 2/2	27
1.24	Thread specification: Local System	28
1.25	Flowchart: Remote Client – Login	29
1.26	Flowchart: Remote Client – Register	30
1.27	Flowchart: Remote Client – Delete User	31

List of Figures

1.28 Flowchart: Remote Client – Rent Ad	32
A.1 Project planning – Gantt diagram	47

List of Tables

1.1	Total spending on Hardware	8
1.2	Pin Mapping	11
1.3	Hardware Test Cases	12
1.4	Remote Client Test Cases	33
1.5	Remote Server Test Cases	34
1.6	Local System Test Cases	35

List of Listings

List of Abbreviations

Notation	Description	First used on page nr.
CSI	Camera Serial Interface	4
DC	Direct Current	2
GPIO	General Purpose Input/Output	1
HDMI	High-Definition Multimedia Interface	1
HW	Hardware	1
mA	milliampere	2
MDO-L	MDO Local System	6
MDO-RC	MDO Remote Client	7
MDO-RS	MDO Remote Server	7
PoE	Power over Ethernet	2
SoC	System-on-a-Chip	1
SW	Software	7
TTL	Transistor-Transistor Logic	2

1. Design

In this section the theoretical foundations are used to design a viable solution, accordingly to the requirements and constraints listed. In the design phase, the product development starts, specifying the system in terms of hardware and software and its associated interfaces, the error handling required, and the design verification.

1.1. Hardware specification

The first step for system design is the HW specification. This can be pictured as a block diagram, this block diagram was already shown and mentioned in section ?? on Fig. ??.

1.1.1. Architecture

Although that in the analysis phase an overview of the HW architecture was conceptualized, in this section, a more specific HW architecture is illustrated, using a block-diagram.

As it can be seen in Fig. 1.1, the Raspberry Pi is the main controller and it is powered by the Power Supply through USB-C. The Power Supply also supplies via Micro-USB the LCD Display control board and the Fragrance Diffusion Actuator. The LCD Display board connects to its board through 50-pin Transistor-Transistor Logic (TTL) and the board connects to the Raspberry Pi through High-Definition Multimedia Interface (HDMI). The Speakers also connect to the LCD Display board through JST PH2.0. Beyond being powered up, the Fragrance Diffusion Actuator also connects to the Raspberry Pi through the General Purpose Input/Output (GPIO). What also connects to the Raspberry Pi through GPIO are the Motion Detection sensors. Lastly, the Camera connects through Camera Serial Interface (CSI) to the Raspberry Pi.

1.1.2. Main Controller

The main controller was also previously mentioned because it makes part of one of the requirements of this project: use the Raspberry Pi 4B (Fig. 1.2). This System-on-a-Chip (SoC) has several of specifications [105]:

1.1. Hardware specification

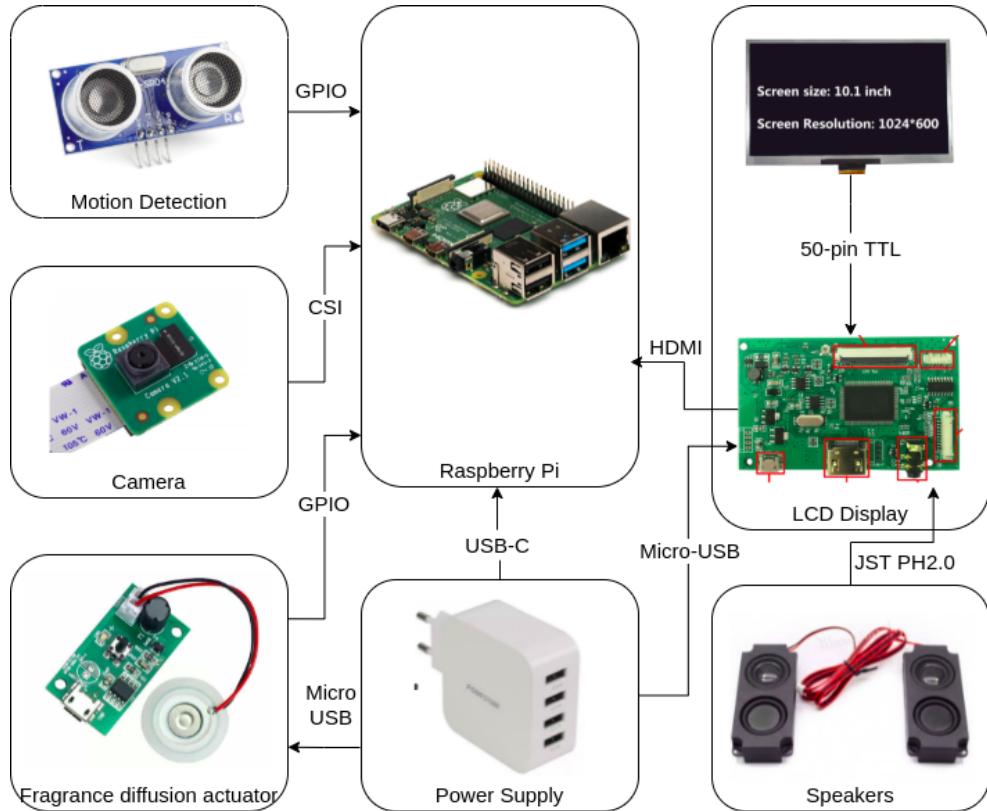


Figure 1.1.: HW architecture Block Diagram

- Processor: it has the Broadcom BCM2711 processor, quad-core Cortex-A72 (ARM v8) 64-bit with 1.5GHz;
- Memory: this model has 4GB LPDDR4 with on-die ECC;
- Connectivity: it has a 2.4 GHz and 5.0 GHz IEEE 802.11b/g/n/ac wireless LAN, Bluetooth 5.0 with low energy, one Gigabit Ethernet port, four USB ports in which two are 3.0 and another two are 2.0;
- GPIO: it has a standard 40-pin GPIO header that is fully backwards-compatible with previous boards;
- Video and Sound: it has two HDMI ports that support up to 4kp60, a 2-lane MIPI DSI display port, a 2-lane MIPI CSI camera port and a 4-pole stereo audio and composite video port;
- Multimedia: H.265 (4Kp60 decode), H.264(1080p60 decode and 1080p30 encode) and OpenGL ES 3.0 graphics;
- SD card support: Micro SD card slot for loading operating system and data storage;
- Input power: it has 5V Direct Current (DC) via USB-C connector (minimum 3A), a 5V DC via GPIO header (minimum 3A) and Power over Ethernet (PoE) - enabled (requires separate PoE HAT);
- Environment: it has a range of operation between 0°C and 50°C.

1.1. Hardware specification

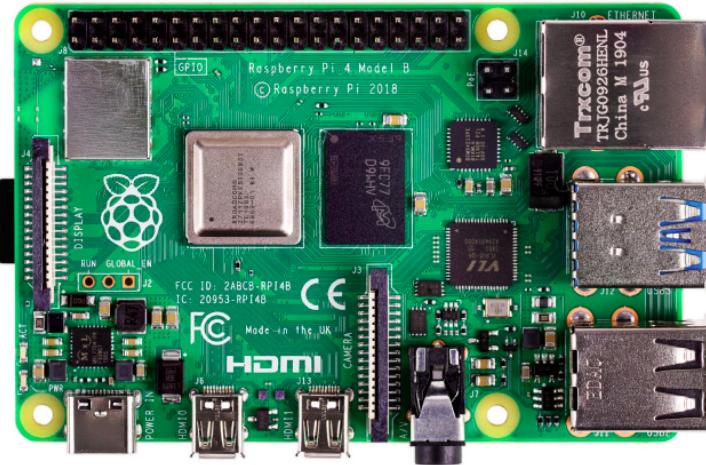


Figure 1.2.: Raspberry Pi model 4B

SD Card

Since this Raspberry supports SD Card, it will be used a micro SD Card with 16 GB that will store everything that is necessary to run the system and handle it.

1.1.3. Motion Detection

For the motion detection, it was already mentioned in section ?? that the best option is to use an ultrasonic sensor. Thus, the sensor that has been chosen is the HC-SR04 Ultrasonic Sensor. This sensor has the following specifications [106]:

- Operating Voltage: 5V DC;
- Operating Current: 15 milliampere (mA);
- Operating Frequency: 40 KHz;
- Maximum Range: 4 meters;
- Minimum Range: 2 centimeters;
- Ranging Accuracy: 3 millimeters;
- Measuring Angle: 15 degrees;
- Trigger Input Signal: 10 microseconds TTL pulse;
- Dimension: 45 x 20 x 15 millimeters.

Sensor Pinout

In Fig. 1.3 is described the sensor pinout and each pin works as follows [106]:

1.1. Hardware specification

1. is the power supply for HC-SR04 Ultrasonic distance sensor which we connect to a 5V supply (for example, 5V pin on Raspberry);
2. pin that is used to trigger the ultrasonic sound pulses;
3. pin that produces a pulse when the reflected signal is received. The length of the pulse is proportional to the time it took for the transmitted signal to be detected.
4. pin that should be connected to the ground (for example, GND pin of the Raspberry).

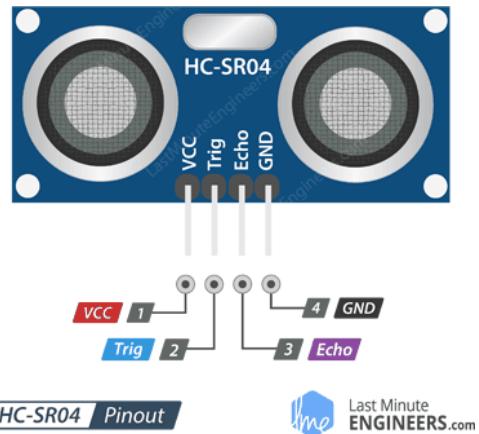


Figure 1.3.: HC-SR04 Pinout (withdrawn from [106])

For this project it will be used three sensors, one placed on the bottom, another on the middle and another one on the top of the machine. With this setup, it can be avoided some perturbations like an animal walking in front of the machine (only the bottom sensor will detect). The disposition of the middle and top sensors can't be too high, because of short people, for example.

1.1.4. Fragrance Diffusion Actuator

The chosen fragrance diffusion actuator is in Fig. 1.4 and has the following specifications [107]:

It has an operating voltage of 5V DC and an operating current of 300 mA. The operating power is 2 Watt. It has a fixed frequency single-chip microcomputer with a frequency of 108 KHz. The dimensions of the board of the module are 35 * 20 * 17 millimeters. It has a strong versatility, large amount of fog, stable performance, the chip has an automatic timing shutdown function (4 hours of continuous work will automatically shut down protection, to turn on again, press the power on again). The 5V USB power supply mode, can be powered by MICRO charging cable. The net diameter of the atomized steel sheet is 16 millimeters, the outer diameter of the silicone ring is 20 millimeters, and the wire length is 8 centimeters.

1.1. Hardware specification



Figure 1.4.: Fragrance module (withdrawn from [107])

1.1.5. Camera

The camera to use in this project needs to be compatible with the board in use, in this case, the Raspberry Pi. Thus the camera module that is used is the **Raspberry Pi Camera Module V2** (Fig. 1.5).

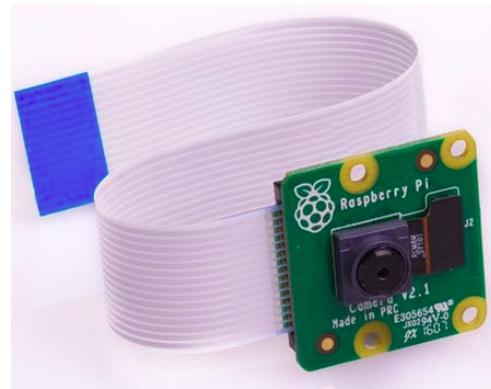


Figure 1.5.: Camera module (withdrawn from [108])

This camera module has a **Sony IMX219 8-megapixel sensor** and can be used to take high-definition video, as well as stills photographs. It supports 1080p30, 720p60 and VGA90 video modes, as well as still capture. It attaches via a 15 centimeters ribbon cable to the CSI port on the Raspberry Pi. The camera works with all models of Raspberry Pi 1, 2, 3 and 4. It can be accessed through the MMAL and V4L APIs, and there are numerous third-party libraries built for it, including the Picamera Python library. [108].

1.1.6. LCD Display

In Fig. 1.6 is the display that is used in this project. One advantage on this display is that it has audio drivers, which means that it is only necessary to plug a speaker and the board can handle the rest. It is also important to refer that the display isn't touch because there is no need to it and also this was the chosen one because it was the bigger and best on market considering quality and price.

As it can be seen, the display has 10.1 inches and it is supplied with 5V DC and with a current of 2 A via a micro USB port. Fig. 1.7 show all the interfaces that the board module of the display provides. That was also one more reason for the choice of this display: it has an **HDMI** interface to connect to the Raspberry, the **50Pin TTL Screen Interface** that will connect to the display and two options to plug audio - the **Speaker Interface** and the **3.5mm audio interface**.



Figure 1.6.: Display (withdrawn from [109])

It can also be seen in this figure that the display has also a remote and a board to handle the remote controls, but in this implementation, it will probably not be in use.

1.1.7. Speakers

When playing video ads, it is not only necessary a display, but also a speaker to playback the sound of the ads. As it can be seen in Fig. 1.7, the screen board has two different interfaces of audio: the speaker interface and the audio interface. For this project it will be used speakers that uses the speaker interface, because that type of speakers with that interface are passive speakers and don't need a DC power supply, which is an advantage [110].

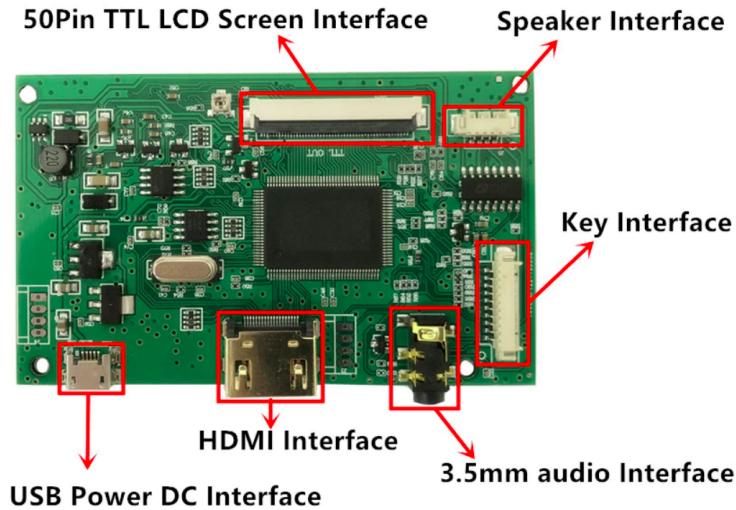


Figure 1.7.: Display Interfaces (withdrawn from [109])

Thus, the speakers that will be used have an impedance of 8 Ohm and a power of 5 Watts and are displayed on Fig 1.8.



Figure 1.8.: Speakers (withdrawn from [111])

1.1.8. Power Supply

The MDO Local System (MDO-L) will be a plugged in system, so it will be needed a plugged in power supply to supply all the components of the system. In total, the power consumption will not overtake 20 Watts and all the supplies necessary are plugged by USB (Raspberry Pi, Fragrance Diffusion Actuator, and screen). So, it will be used the power supply in Fig. 1.9, that has 4 outputs of 5 V DC and 2.4 A DC each.

1.1. Hardware specification



Figure 1.9.: Power Supply (withdrawn from [112])

1.1.9. On/Off button

In this context, an On/Off button can be useful to power On/Off the MDO-L. However, this feature is not that necessary, so, this prototype will be only powered through the power supply previously talked in section 1.1.8 and will be always on until the power supply be unplugged, powering off the machine.

1.1.10. Total HW cost

The total HW cost can now be precisely calculated, once that all the hardware is now specified on table 1.1, yielding about 175 EUR.

Table 1.1.: Total spending on Hardware

Item	Quantity	Price (€)
Raspberry Pi 4B	1	70.00
Ultrasonic Sensor HC-SR04	3	11.70
Fragrance Diffusion Actuator	1	3.23
Raspberry Pi Camera V2	1	20.00
LCD Display	1	51.95
Speakers	1	3.00
Power Supply	1	13.50
Total		173.38

1.2. Hardware interfaces definition

After specifying the HW, it is important to define its interfaces. Firstly, it is necessary to have basic know-how of the main board's pinout. In Fig. 1.10 is represented the pinout of the Raspberry Pi.

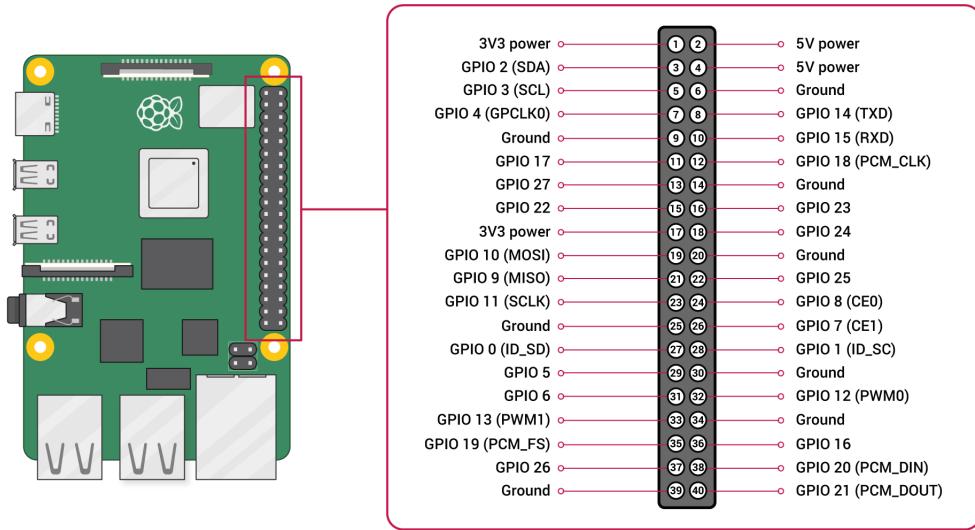


Figure 1.10.: Power Supply (withdrawn from [113])

1.2.1. Peripherals Mapping

After have a basic know-how of the Raspberry's pinout, it is now possible to map all the HW components. As it can be seen in Fig. 1.11, only two types of peripherals need to be mapped in the Raspberry: the ultrasonic sensor and the fragrance diffusion actuator.

Firstly, the ultrasonic sensors can have three of their four pins in common: the Vcc, the GND and the Trig. The first two are for obvious reasons: they can be powered for the same source, so they are connected to the pin 2 (5V power) and pin 9 (Ground), respectively. The last one is because the trigger only triggers the sensors to start the acquisition, so, they can all start at the same time and have the same trigger source, so, they are all connected to the pin 11 (GPIO 17). Then, each one of them need a specific pin to connect to its Echo in order to make the distance read, so, the pins that are chosen are pin 15 (GPIO 22), pin 16 (GPIO 23) and pin 18 (GPIO 24).

Lastly, the fragrance diffusion actuator. Although this one is powered up by Micro-USB, it is necessary to activate or deactivate the diffusion and this is only possible with a Metal Oxide Semiconductor Field-Effect

1.2. Hardware interfaces definition

Transistor (MOSFET), activating its gate. The gate is connected to the pin 36 (GPIO 16) and this is the pin responsible to activate or deactivate the fragrance diffusion.

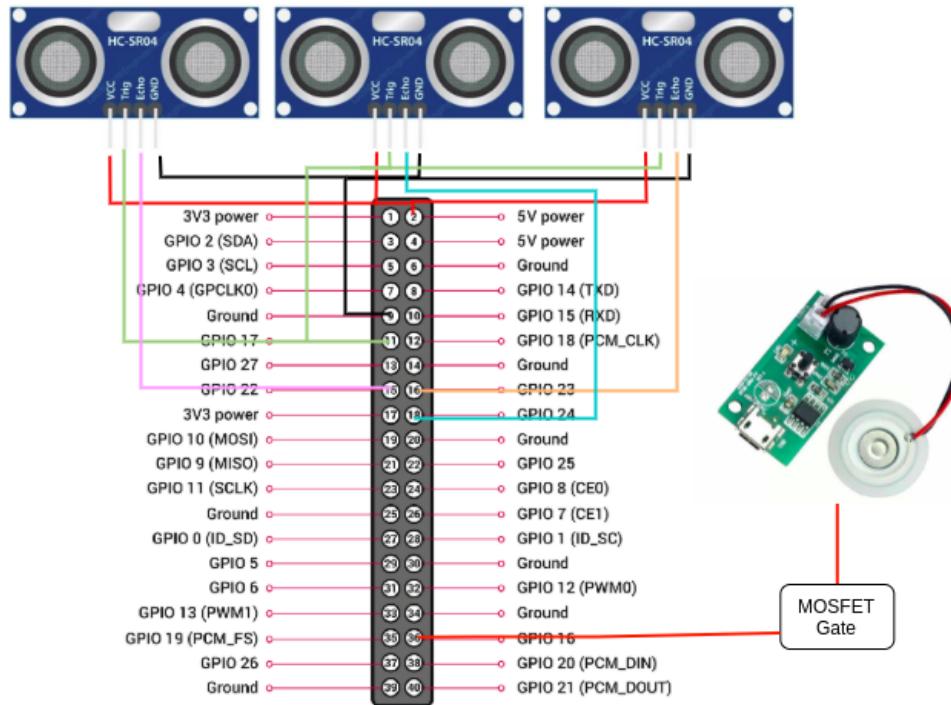


Figure 1.11.: Peripheral Mapping

To turn things more clear, Table 1.2 shows all the pin mapping in a more clear way.

1.2.2. Test Cases

In order to verify if all the hardware is in good conditions, are made some test cases to each component. In Table 1.3 are displayed all the test cases to be done in all pieces of HW. Basically, all tests are functional tests and need to be done to know if some component may be damaged or also could not be in the error range provided by the manufacturer.

1.2.3. PCB Design

As it can be seen in Fig: 1.11, it is a little bit complex and messy to look and conceive a circuit with all those connections, and since many connections are in common, it is an advantage to design a PCB to make things more simpler.

1.3. Software specification

Table 1.2.: Pin Mapping

Pin Mapping		
Controller Pin	Interface Device Pin	Function
Pin 2 (5V)	Ultrasonic Sensors (Vcc)	Supply 5V to the sensors
Pin 9 (Ground)	Ultrasonic Sensors (GND)	Close the supply connection
Pin 11 (GPIO 17)	Ultrasonic Sensors (Trig)	Make pulses to the Trigger's sensors in order to start the distance acquisition
Pin 15 (GPIO 22)	Ultrasonic Sensor 1 (Echo)	Handle the Echo Pin of the first sensor in order to measure the distance
Pin 16 (GPIO 23)	Ultrasonic Sensor 2 (Echo)	Handle the Echo Pin of the second sensor in order to measure the distance
Pin 18 (GPIO 24)	Ultrasonic Sensor 3 (Echo)	Handle the Echo Pin of the third sensor in order to measure the distance
Pin 36 (GPIO 16)	MOSFET's Gate	Toggle the gate of the MOSFET in order to turn On/Off the diffusion actuator

For the design of this PCB it was used the software **PADS**, developed by Mentor Graphics. In Fig. 1.12 is the schematic of the connections to the PCB, this part was made on **PADS Logic** and basically is joining everything that is common to the sensors to then connect to the raspberry Pi, then there's a pin for every Trigger of every sensor and finally a pin for the gate of the MOSFET and two pins for its supply.

When the logic is done, it is moved to the layout on **PADS Layout** where all the components are placed and connected through tracks. In Fig 1.13 is the final layout of the PCB. Note that there are two tracks that are more wide, this is because they are the tracks that supply the MOSFET and this one need more current, which means wider tracks.

Connectors J1, J2 and J3 are for the sensors, connector J4 is for the GPIO of the Raspberry Pi, connector J5 supplies the sensors and connector J6 supplies the MOSFET Q1.

It is to note that the final size of the PCB is 2400 * 2200 mils. Converting this to centimeters gives a dimension of approximately 6.1 * 5.6 centimeters.

1.3. Software specification

Next, the SW responsible for system operation is specified for all subsystems — **MDO Remote Client (MDO-RC)**, **MDO Remote Server (MDO-RS)**, and **MDO Local System (MDO-L)**. All these subsystems are event-driven (asynchronous), and they can be more easily specified using state-machine diagrams, previously illustrated in the analysis phase (Section ??). Also in the analysis phase, the use case diagrams helped to identify the main features required for the system and the respective sequence diagrams helped

1.3. Software specification

Table 1.3.: Hardware Test Cases

HW Component	Type of test	Description	Expected Result
Ultrasonic Sensor	Functional	One will connect the ultrasonic sensor to the Raspberry Pi. Then, an object will be approximated to the sensor from several distances with the corresponding distance being measured with a measuring tape.	If the distance measured by the sensor and the measuring device are within the error margin provided by the manufacturer, the device is compliant.
Camera	Functional	One will connect the camera to the Raspberry Pi and then will try to make image acquisition in real time, take pictures and also try to take some gifs and videos.	If the quality of the image and the image acquisition are in good quality according to the manufacturer's information, then the device is in good conditions of use.
Fragrance Diffusion Actuator	Functional	One will connect a MOSFET to the fragrance diffusion and connect its gate to the Raspberry Pi. Then, one will trigger the MOSFET's gate and watch the actuator's behavior.	If the diffusion actuator diffuses in good state the fragrance and also if the MOSFET doesn't overheat, then the set of HW is in good conditions of use.
Power Supply	Functional	One will connect the three components (LCD, Fragrance Diffusion Actuator and Raspberry Pi) to the power supply and see their behavior.	If all components work properly, then this piece of HW is in good conditions of use.
Speakers	Functional	One will connect the Speakers to the LCD board and try to run a video with sound in order to verify the sound provided by the speakers.	If the sound output matches the manufacturer's characteristics of the product, then this set of HW is compliant.
LCD Display	Functional	One will connect the LCD board through HDMI to the Raspberry Pi, the LCD Display to its board and supply the board and then try to send some images and videos to the LCD Display.	If the images and videos are displayed in good quality and are in match with the manufacturer's information, then this set of HW is in good conditions of use.

1.3. Software specification

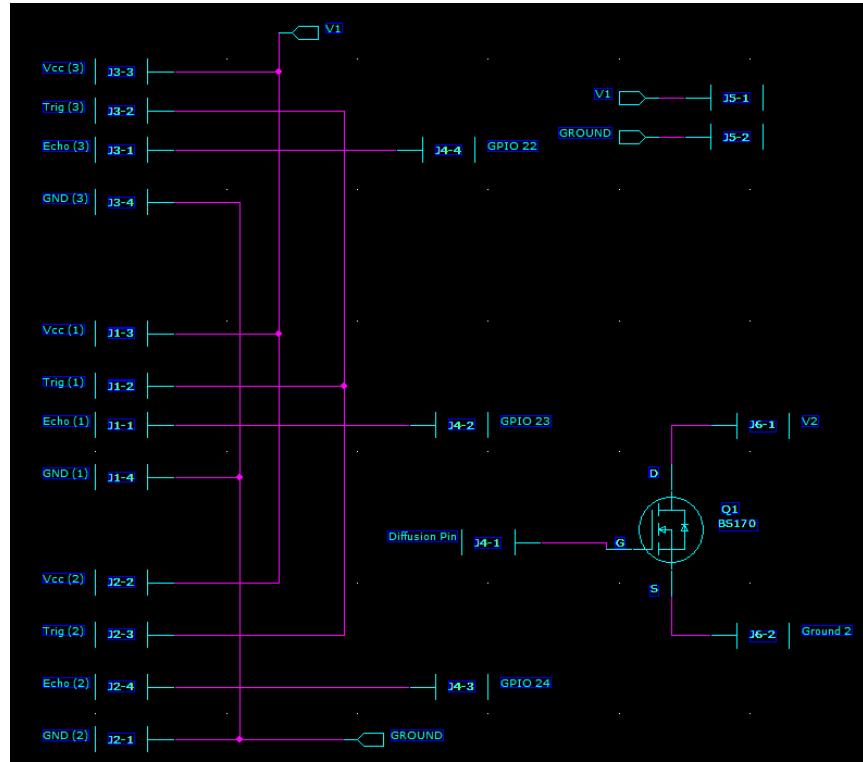


Figure 1.12.: PCB schematic

to clarify the intervening objects and the interaction among them.

In this section, the analysis phase information is used to derive the static architecture of the system – classes diagram – and to specify algorithms for its implementation through flowcharts, keeping in mind that the several subsystems operate multiple tasks concurrently, thus requiring the tasks' specification and its priorities. The data frame formats are specified for communication between the different modules. The Entities-Relationships diagram (ERD) are depicted to design the required databases and the User Interface (UI) mock-ups are recalled. The test cases for each subsystem are listed, defining its operation and the expected result. The Commercial off-the-shelf (COTS) SW and the third-party libraries are identified and a mapping between class topics and the foreseeable implementation is presented for clarification. Finally, the SW tools are listed.

1.3.1. Software architecture

The system's SW architecture was devised using [Unified Modeling Language \(UML\)](#) component diagrams for Remote Client (Fig. 1.14), Remote Server (Fig. 1.15), and Local System (Fig. 1.16). Each component diagram illustrates all SW components for the system in analysis and the interaction between them, and its

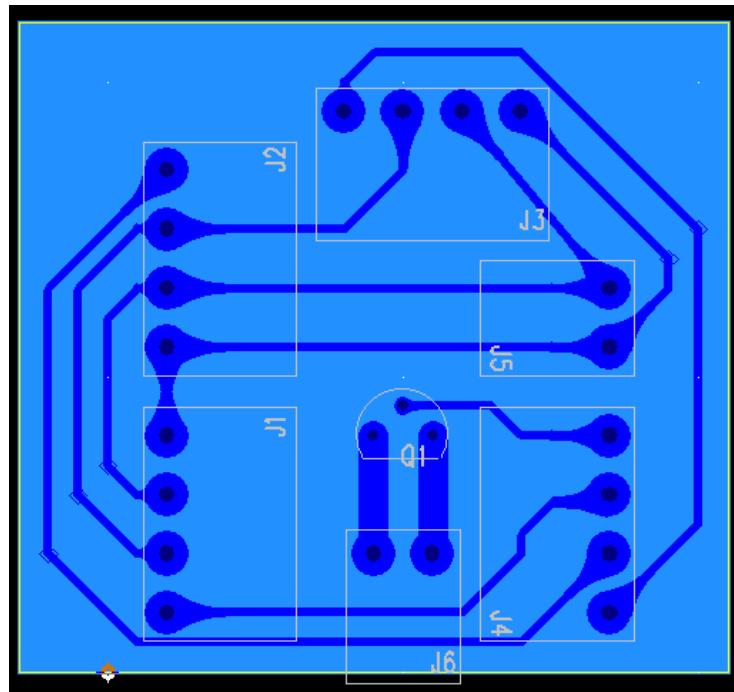


Figure 1.13.: PCB layout

interfaces with external subsystems.

Remote Client

Fig. 1.14 depicts the Remote Client SW architecture, encapsulated in the package MDO-RC: AppManager, and is comprised of the following artifacts:

- User Interface package: contains the UI and UI Engine. It is responsible for providing user feedback and capturing UI events which drive the Remote Client's logic.
- Comm Manager package: manages incoming and outgoing connections to the Remote Server (package MDO-RS: App Manager), periodically checking the connection status by pinging the Remote Server. All connections consist of Transmission Control Protocol/Internet Protocol (TCP/IP) sockets.
- DB Manager package: manages the queries and the associated responses by building or parsing them, respectively.
- Remote Controller package: contains the Cmd Parser, which parses the command responses received from the Remote Server when the Admin is performing remote control of the Local System.
- RC Rx Parser component: high-level parser which filters between db responses and cmd responses for appropriate dispatching.

1.3. Software specification

- TCP/IP Tx socket: outgoing connection node, through which tx frames are sent to the Remote Server.
- TCP/IP Rx socket: incoming connection node, through which rx frames are received from the Remote Server.

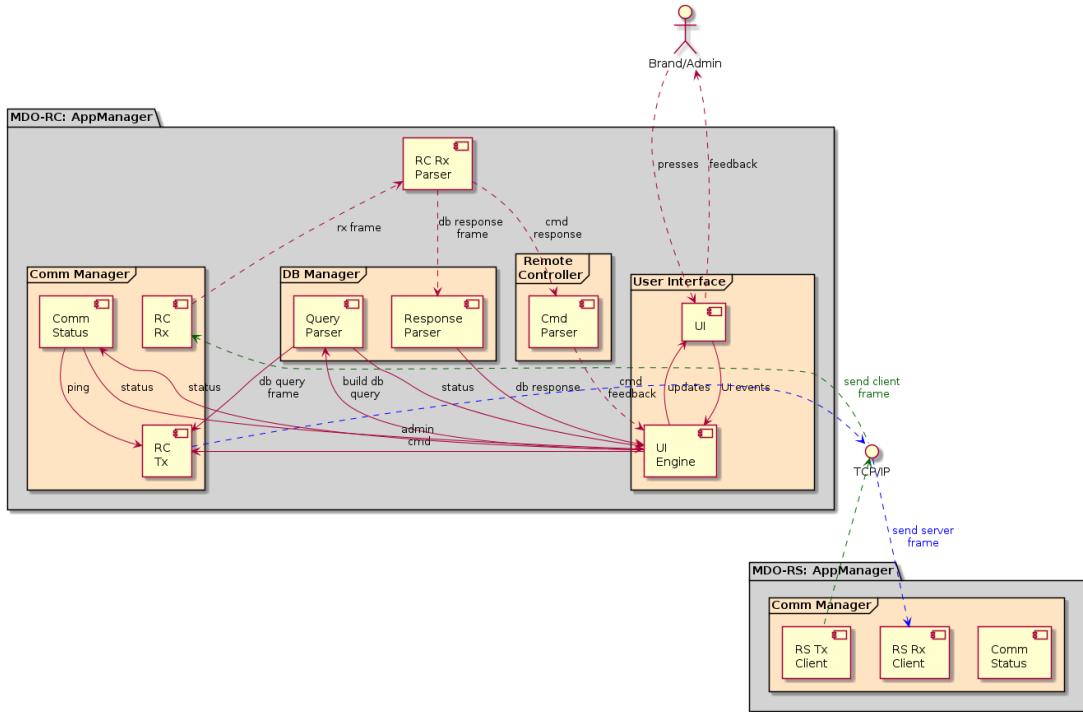


Figure 1.14.: SW architecture: component diagram – Remote Client

Remote Server

Fig. 1.15 depicts the Remote Server SW architecture, encapsulated in the package MDO-RS: AppManager. It interacts with the Remote Client (package **MDO-RC: AppManager**), with the Local System (package **MDO-L: AppManager**), and with the Database (DB) server (**MDO-RS: DB Server**). The database management is done using client-server architecture, with **MDO-RS: AppManager** containing the DB client and **MDO-RS: DB Server** the server.

The MDO-RS: AppManager package is comprised of the following artifacts:

- Command-Line Interface package: contains the **Command Line Interface (CLI)**, the **CLI Engine**, and the **CLI Parser**. It provides the server external interface for clients to perform requests, capturing the events which drive the Remote Server's logic.

1.3. Software specification

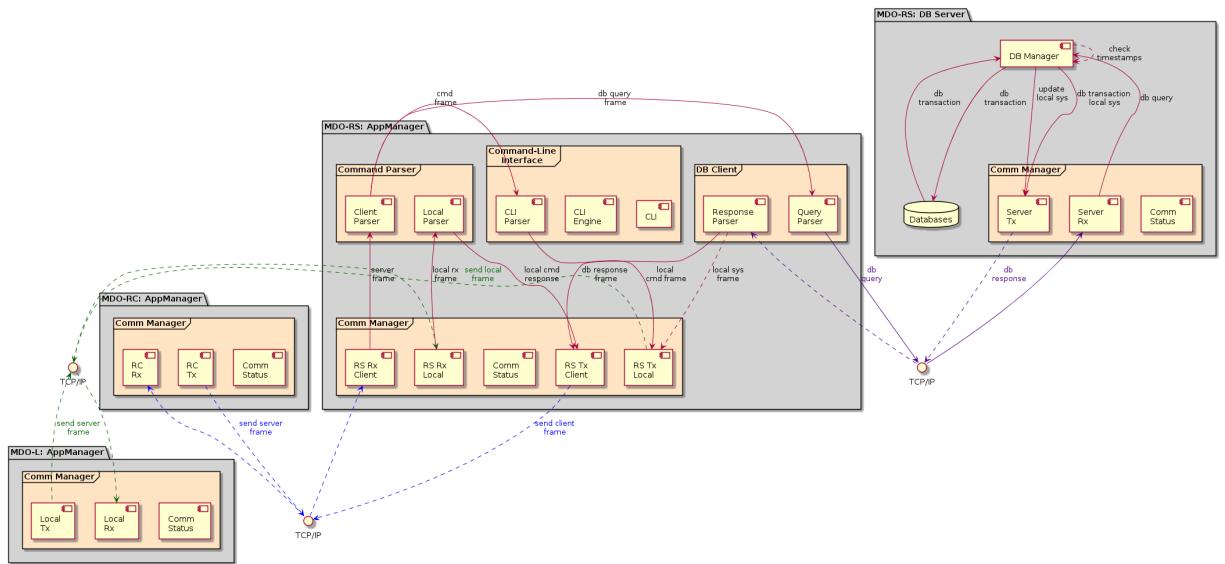


Figure 1.15.: SW architecture: component diagram – Remote Server

- Comm Manager package: manages incoming and outgoing connections to the Remote Client (package MDO-RC: App Manager), and each Local System (package MDO-L: AppManager) it needs to interact. It periodically checks all connections statuses. All connections consist of TCP/IP sockets.
- DB Client package: manages the queries and the associated responses by building or parsing them, respectively. It performs the requests for DB server with the solicited queries.
- Command Parser package: contains the Client Parser, and the Local Parser to parse and handle frames received from the Remote Client or Local System, respectively, forwarding it for appropriate dispatching.
- TCP/IP sockets: incoming/outgoing connection nodes, through which incoming or outgoing traffic flows for the Remote Client, the Local System and the DB Server.

The MDO-RS: DB Server package is comprised of the following artifacts:

- Comm Manager package: manages incoming and outgoing connections to the DB Client (in package MDO-RS: App Manager). It periodically checks all connections statuses. All connections consist of TCP/IP sockets.
- DB Manager package: handles the received queries, issuing transactions for the databases and returns its response. It is also responsible for periodically checking timestamps, and when there is a match, update the local system with the relevant information.
- Databases: contains the actual data stored.

1.3. Software specification

Local System

Fig. 1.16 depicts the Local System SW architecture, encapsulated in the package **MDO-L: AppManager**.

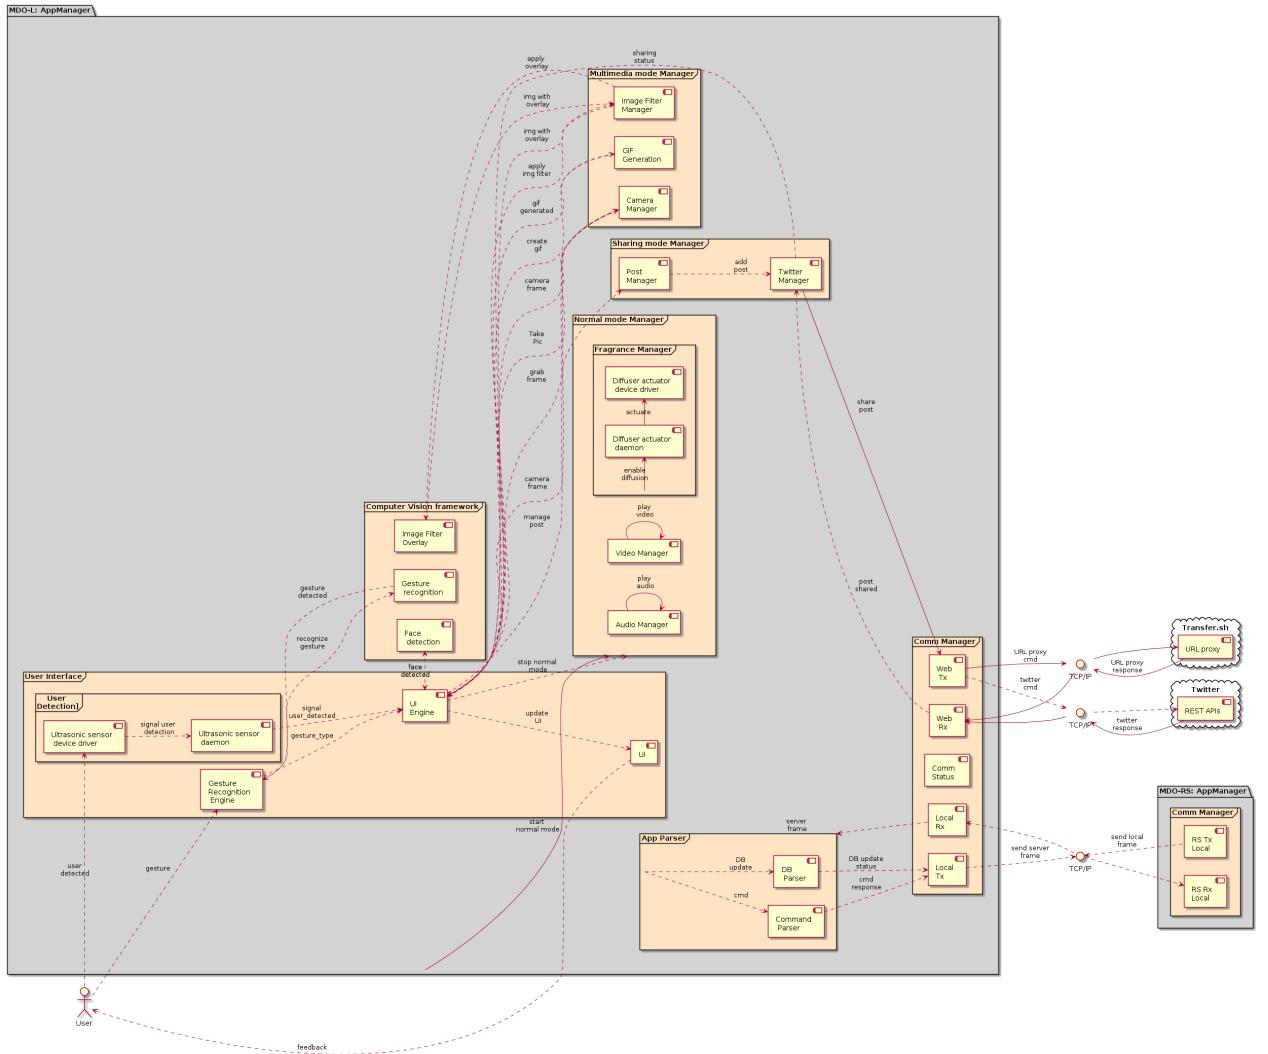


Figure 1.16.: SW architecture: component diagram – Local system

It interacts with:

- **Remote Server** (package **MDO-RS: AppManager**): to retrieve updates on its operation or Admin commands
- **Twitter** (via its Representation State Transfer (REST) Application Programming Interfaces (APIs)): to share posts on it
- **transfer.sh** – an Uniform Resource Locator (URL) proxy server: to ease file transfer between the

Remote Server and the Local System.

The MDO-RS: AppManager package is comprised of the following artifacts:

- User Interface package: contains the **UI**, the **UI Engine**, the **Gesture Recognition Engine**, and the **User Detection package**. The **UI** provides user feedback and **UI Engine** captures the events that drive the **Local System**'s logic. When a user approaches the **Local System**, the **Ultrasonic sensor device driver** captures this event and passes it to the user space where the **Ultrasonic sensor daemon** logs it, which, in turn, signals this event to the **UI Engine**. When the **User** performs gestures, the **Gesture Recognition Engine** requires a service to the **Gesture recognition component (Computer Vision Framework)** to recognize the gesture. Also, when the **User** is detected, the **UI Engine** requests the **Normal mode manager** to stop running, and requests **Face detection** to track people's faces in the camera.
- Comm Manager package: manages incoming and outgoing connections to the **Remote Server** (package **MDO-RS: App Manager**), and the internet for each web service it needs to interact (**Twitter** and **transfer.sh**). It periodically checks all connections statuses. All connections consist of TCP/IP sockets.
- Computer Vision framework package: manages the computer vision related tasks, namely, gesture recognition, face detection, and image filter overlay.
- Multimedia Mode Manager package: manages the multimedia mode related tasks, namely, image filtering, Graphics Interchange Format (GIF) generation, and camera management.
- Sharing Mode Manager package: manages the sharing mode related tasks, namely, post management, and social media management, in this case, **Twitter**.
- Normal Mode Manager package: manages the normal mode related tasks, namely, fragrance diffusion, video and audio outputs. The fragrance diffusion is requested to the device driver using a daemon to bridge user-space and kernel-space.
- App Parser package: manages the parsing for database queries and requested commands.
- TCP/IP sockets: incoming/outgoing connection nodes, through which incoming or outgoing traffic flows for the **Remote Server**, and the web services for **Twitter** and the **URL proxy server**.

1.3.2. Deployment specification

The deployment specification maps the software artifacts derived in the component diagrams to the respective computational node where it will be executed. This step pertains to the implementation phase; nonetheless, it is illustrated here as it clarifies the SW architecture, as well as it guides some design decisions.

1.3. Software specification

Fig. 1.17 depicts the deployment diagram for the MDO system. In blue are represented the computational nodes of interest, namely:

- **Linux PC**: it is the host device, where are executed the packages (in grey) **MDO-RC: AppManager**, the **MDO-RS: AppManager**, and the **MDO-RS: DB Server**. All connections between packages in the **Linux PC** and **Raspberry Pi** are TCP/IP sockets in a client-server architecture. The design and subsequent implementation of these packages are not limited by the embedded device constraints, thus, the focus is on functionality and ease of implementation. It is important to note the design is decoupled, i.e., the **Remote Client** and **Remote Server** can be executed in different computational nodes, where, the former runs on a desktop computer and the latter on a cloud-based service or mainframe, thanks to the client-server architecture based on TCP/IP sockets. Thus, for practicality reasons, both subsystems are implemented on the same **Linux PC**, but it should be straightforward to migrate them to different and distinct platforms.
- **Raspberry Pi**: it is the embedded device, where is executed the package **MDO-L: AppManager**. It interacts with **Remote Server** and **Web services – Twitter and Transfer.sh** – using TCP/IP sockets in a client-server architecture. The design and subsequent implementation of this package is limited by the embedded device constraints, thus, the focus is on functionality and performance.
- **Web**: it represents the remote computational nodes where the **Web services – Twitter and Transfer.sh** are executed. The **Local System** interacts with these services using TCP/IP sockets in a client-server architecture through the exposed APIs.

1.3.3. Database design

As aforementioned in Section ??, the conceptual design of a database consists of a high-level description of the data to be stored in the database and its constraints, which is usually carried out using the Entity-Relationship (ER) model. Thus, in Section ?? the key concepts of the ER model are presented, which can be reviewed to assist the comprehension of the subsequent database design produced.

Fig. 1.18 depicts the Entities-Relationships diagram (ERD) for the conceptual design of the MDO system's database, with the primary keys shown in red and the foreign keys in blue, comprising the relevant entities and its relationships, namely:

- **User**: models an User in the application (Brand or Admin). It has a role, a name, an email, and a pass (which is encrypted before being stored). An **User** manages 0 or many **UserStations** and owns 0 or many **Ads**.
- **UserStations**: it unfolds the relationship many-to-many between an **User** and a **Station**. An **User** manages 0 or many **UserStations**, and a **UserStations** contains one or many **Stations**. It imports the

1.3. Software specification

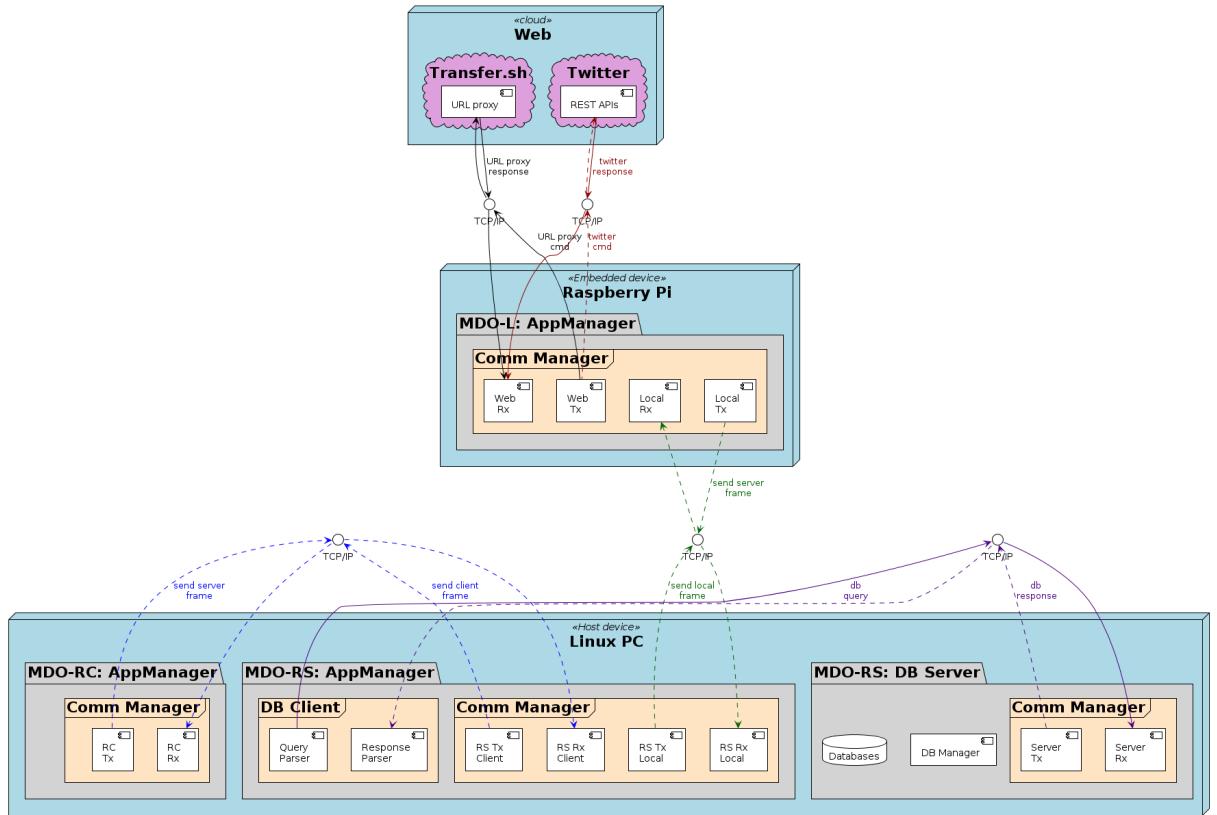


Figure 1.17.: Deployment diagram

User.id as a foreign key to enable referencing an User.

- **Station**: it models a physical MDO station. It contains an id, a name, a location and an IP address. It imports the **UserStations.id** as a foreign key to enable referencing an **UserStations**.
- **TimeTable**: it models a weekly timetable that every **Station** contains. It contains one or many **TimeSlots**. It imports the **Station.id** as a foreign key to enable referencing a **Station**.
- **TimeSlot**: it models a slot of time available for ads reproduction. It contains the duration (in minutes), the cost, and a flag signaling if it is rented or not. It imports the **TimeTable.id** as a foreign key to enable referencing a **TimeTable**.
- **Ad**: it models an advertisement. It imports the **User.id** as a foreign key to reference an **User**, a **Fragrance.id** to reference the associated **Fragrance**, and a **TimeSlot.id** to reference a **TimeSlot**. The **Fragrance** is optional, but, as the foreign key must not contain a null value, a default value of 0 is used to signal that no fragrance is used.
- **MediaFile**: it models a media file that must be attached to the **Ad**. It contains an id, file specifications (filename, filesize, and filetype), mdata for storing the file and an optional description. It imports the **Ad.id** as a foreign key to enable referencing an **Ad**.

1.3. Software specification

- **Fragrance**: it models a Fragrance. It is added to the database by the Admin and it can be selected by the Brand from the **FragranceList** available for each **Station**. It contains an id, a name, an intensity to define the actuation time, a maximum capacity (**vol_ml_max**) and a current capacity (**vol_ml_level**), and an optional description. It imports the **FragranceList.id** as a foreign key to reference the **FragranceList** available for each **Station**.
- **FragranceList**: it represents the list of fragrances available for each **Station**. It imports the **Station.id** as a foreign key to reference its associated **Station**.

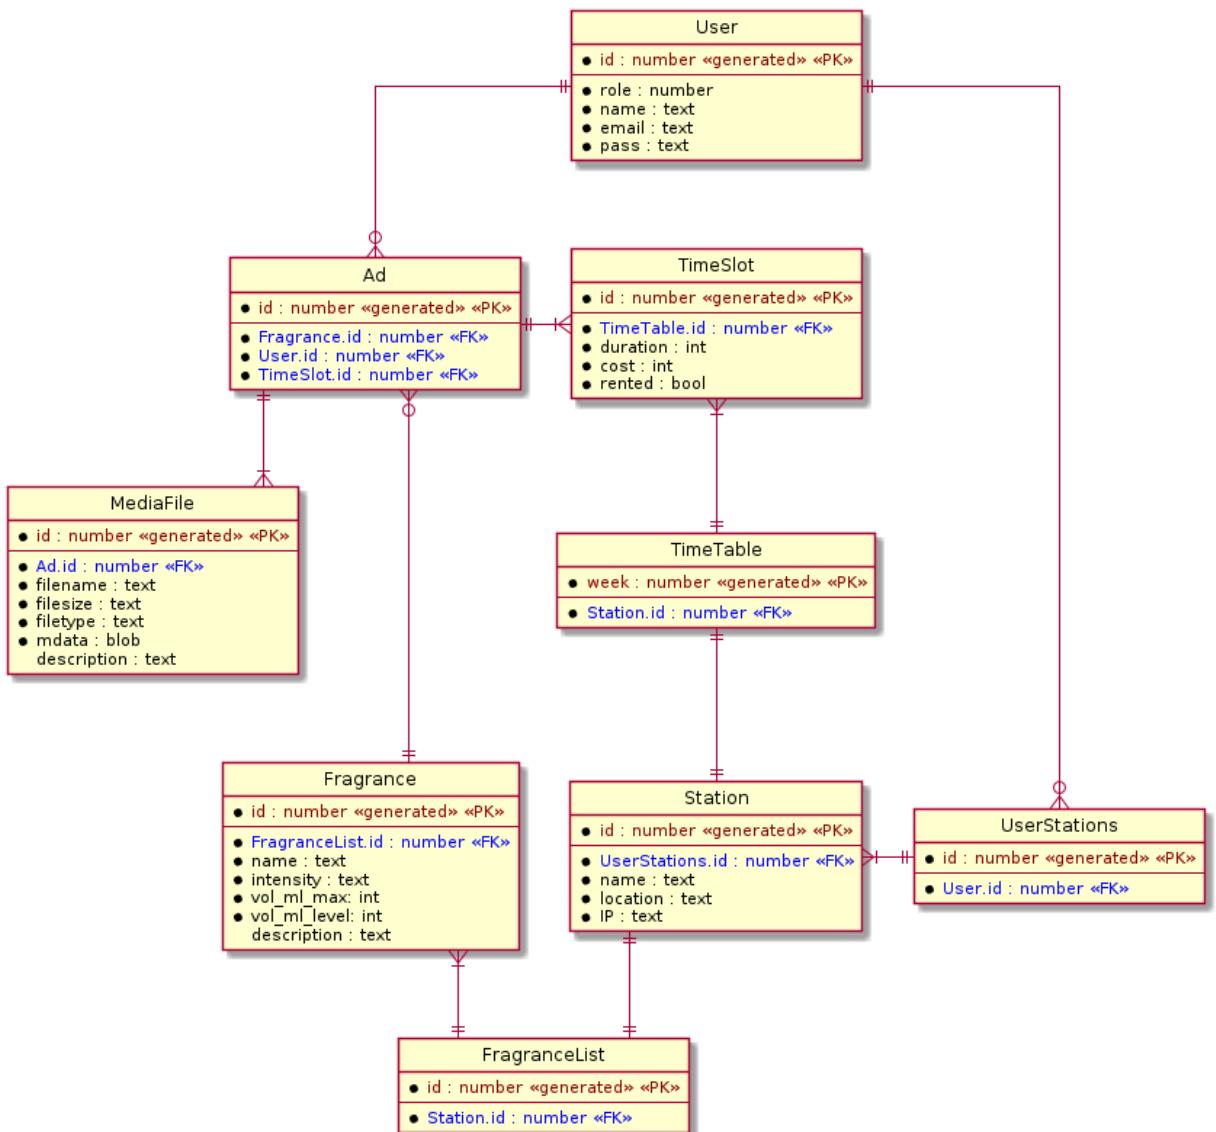


Figure 1.18.: MDO Entity-Relationship Diagram: conceptual design

1.3.4. Data formats

After devising the SW architecture the data flow across the several subsystems became clearer, with data frames being conveyed through TCP/IP sockets. Thus, it is important to define the data formats for internal representation and communication between the subsystems, as illustrated in Fig. 1.19. In gray are depicted the several subsystems, in white the data frames and in blue the legend.

The several subsystems will communicate using a basic data frame – rxFrame – which contains a header, the data length, the actual data, and an ACK (acknowledge) signal. The header defines the frame type which can be DB (database queries), CMD (commands sent to be executed), and AD (ads to be reproduced – only for Local System). It is important to note: the usefulness of data's datatype being `void*`, as it is generic, and thus enables the encapsulation of other data frames – e.g., the AdFrame is encapsulated within a rxFrame; the ACK signal is a valid terminator for all data frames – helping to identify bigger data frames than the maximum ones, and to prevent ill-intentioned data frames usage to corrupt the system – of type `int` to prevent collisions with normal messages sent.

The AdFrame contains the information about the advertisement to be reproduced, namely its type, intensity, start time, duration, media length, and media URLs. The first identifies the fragrance within the Local System, the second is used to calculate the fragrance diffusion timing, the start time is the elapsed time from the start of the day, the duration is the reproduction time of the ad (in minutes), and the mediaURLs contain the URLs from where the media files can be downloaded and stored in the Local System.

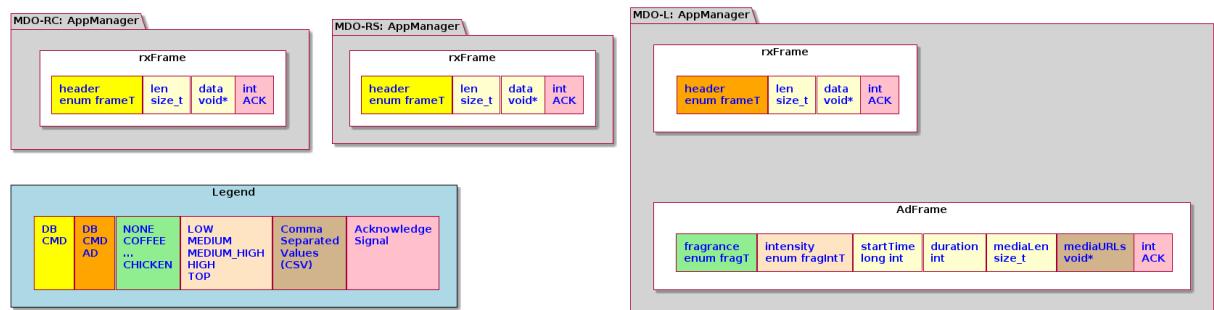


Figure 1.19.: Data formats

1.3.5. Static architecture – Class diagrams

In this section the static architecture is derived from the SW architecture, i.e., the class diagrams are outlined, using the component diagrams as a starting point, for each subsystem.

Remote Client

Fig. 1.20 depicts the class diagram for the Remote Client subsystem. The **UIApp** and **UIWindow** handle all the events made by the user with the UI. The **CommManager** handles the communication between this system and the **Remote Server**, which has an enumerator to classify the connection status (**ConnStatus**) and also the class **DBManager** handles all the databases through its functions and enumerators **DB_OPER** and **DB_OBJ**. Then, there's the normal classes that are mandatory to have: **User** and **Admin** that have a relation (because an Admin is a User), **Station** with its **TimeTable**, **Date** and also **Ad** to handle the ads.

There are some functions that are important to be referenced, such as **serialize()** - this function serializes all the members of the class in order to be more easier to build queries to the databases, that's why there is a function with that name in almost all classes. Also, the function **buildQuery** is important because it builds the queries to send to the databases having in mind the type of query and the table that it wants to access. In this way, it is more easier to handle all the application, with no need to save too much data unnecessarily.

Remote Server

Fig. 1.21 depicts the class diagram for the Remote Server subsystem.

Local System

Fig. 1.22 and Fig. 1.23 depicts the class diagram for the Local System.

1.3.6. Threads specification

In this section the threads specification are performed for the several subsystems, assigning them the respective priority. A color scheme is used to define thread priority, with red being the highest and green the lowest. Additionally, the threads are ranked from highest (at the top) to lowest (at the bottom) in each frame.

Local System

Fig. 1.24 illustrates the thread specification and the associated priorities for the Local System. There are four logical groups:

1. User Interface: the **UserDetection** detects when a user is in range and is the top priority thread, as it will determine the device's mode, stopping normal mode and going into interaction mode.

1.3. Software specification

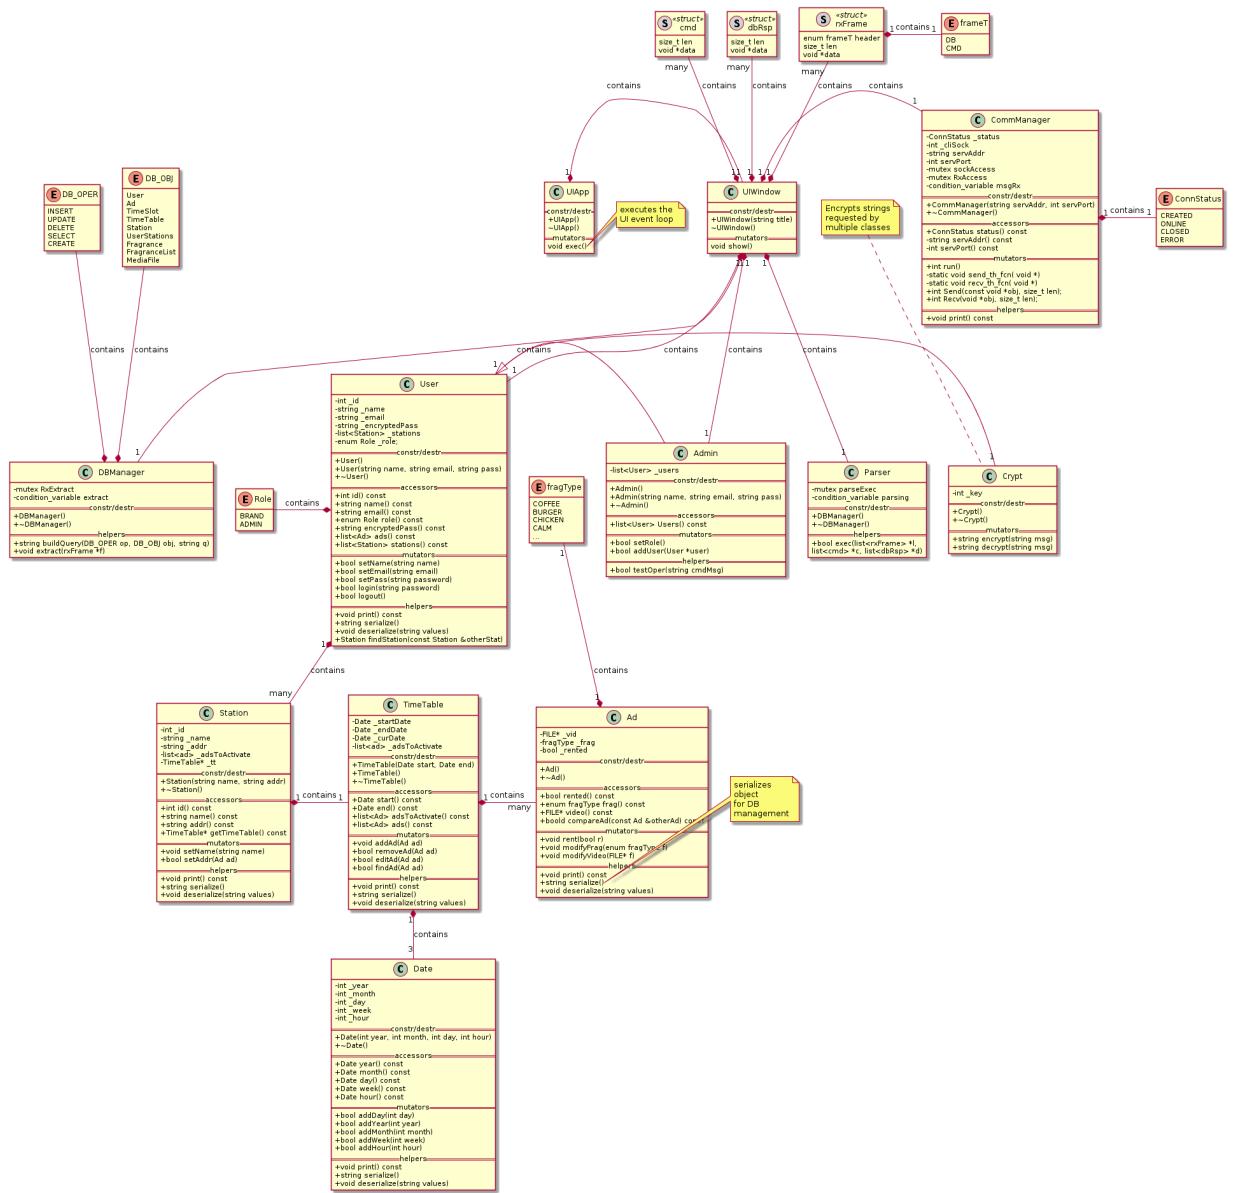


Figure 1.20.: Class diagram: Remote Client

The FrameGrabber and UI threads are high priority. The first grabs frames from the camera and stores it in a frame buffer which is available to the UI, ImgFilterOverlay, and GestureRecognition threads. The second is responsible for providing user feedback on the Liquid Crystal Display (LCD) display.

The ImgFilterOverlay, and the GestureRecognition, and the threads are medium priority. The first is responsible for detecting faces on the camera frame buffer and applying the selected image filter overlay, and the second for recognizing User gestures.

1.3. Software specification

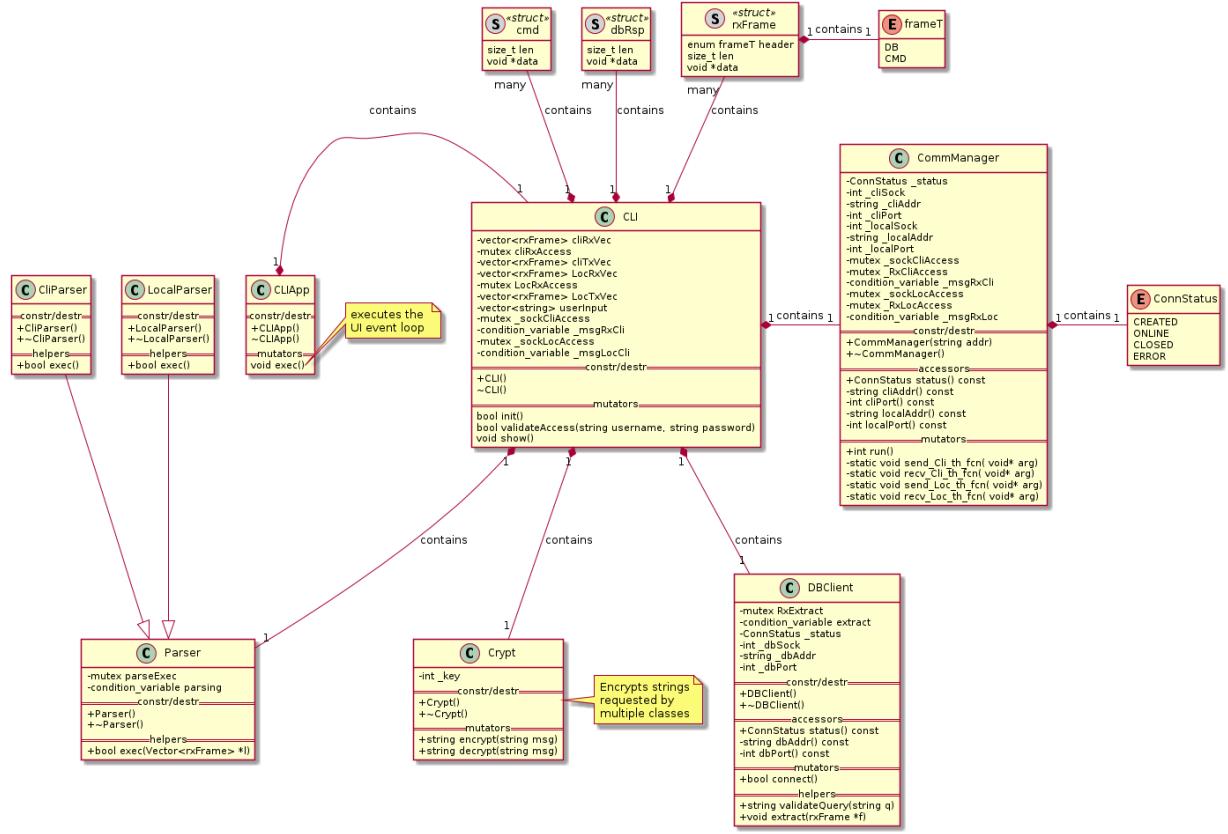


Figure 1.21.: Class diagram: Remote Server

It should be noted that only the **UserDetection** and **UI** threads should be permanently running, while the others are only running while an **User** is detected.

2. **Comm**: these threads are responsible for communications handling. **LocalRx** is the top priority thread, as it needs to check if an relevant command or database update has arrived. It stores the incoming data frames into a First-In, First-Out (FIFO) buffer.

The **AppParser** and the **LocalTx** are high priority threads. The first consumes incoming data frames and dispatches it for processing. The second transmits outgoing data frames to the **RemoteServer**. The **TwitterShare** and **FileTransfer** are low priority tasks, as they don't impact the user experience or device operation significantly. The first is responsible for sharing posts on Twitter. The second handles file transferring between **RemoteServer** and the **LocalSystem**.

3. **Normal mode**: these threads are only running when normal mode is on. **AudioMan** and **VidMan** are high priority tasks, and they are responsible for Ad's audio and video management, respectively.

FragMan is a medium priority task, as variations in the fragrance diffusion are less significant for user experience. It is responsible for diffusing the fragrance.

1.3. Software specification

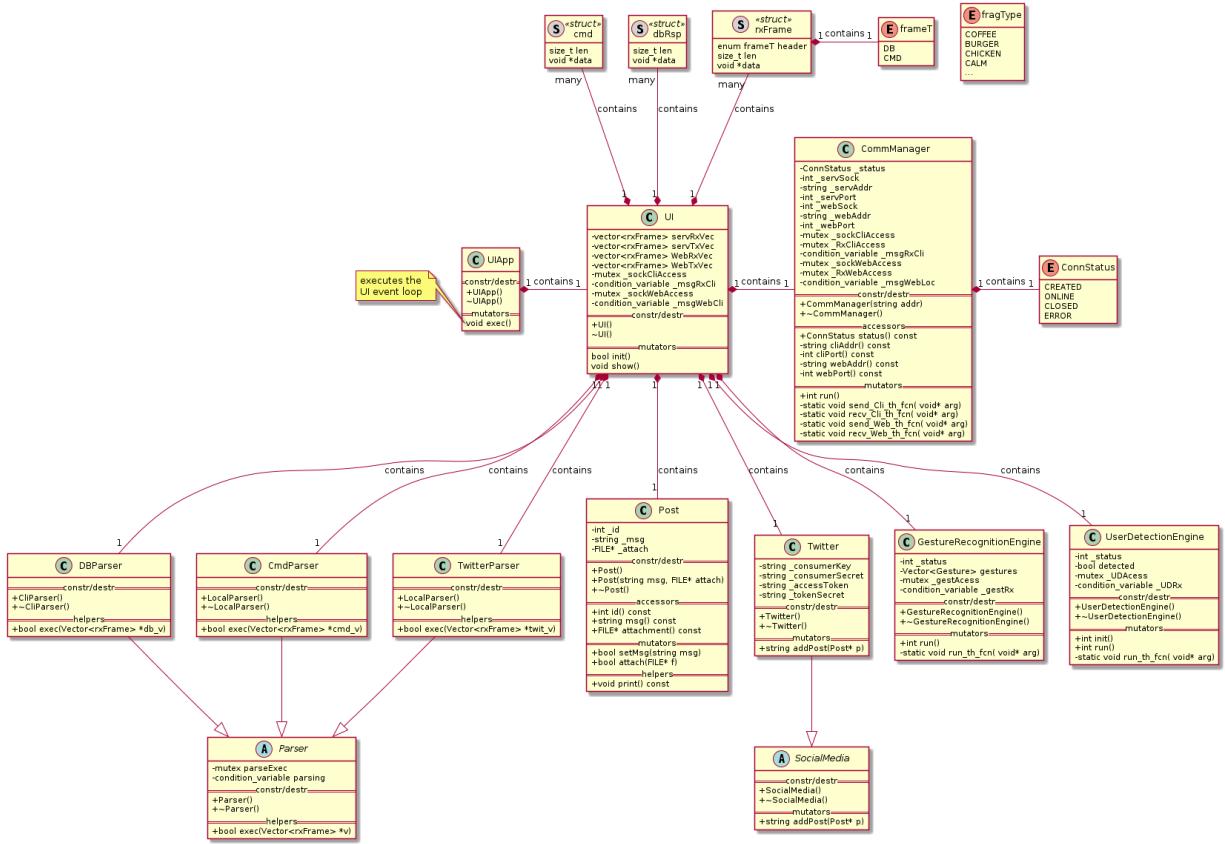


Figure 1.22.: Class diagram: Local System – part 1/2

4. **Multimedia mode:** the GifGenerator is a low priority thread, responsible for generating GIFs. It should only run after a user request was acknowledged.

1.3.7. Flowcharts

In this section are presented the most important flowcharts of all the systems. These flowcharts are important to implement because it gives to one the essentials to build all the system.

Remote Client

In the Remote Client there are several functions to implement. However, most of them have particularly the same implementation method. This is because the class diagrams designed are well designed for the code to be the more easy to implement as possible.

In Fig. 1.25 is the flowchart of the Login feature. After the login button being pressed, it is necessary to verify if all fields are filled. If so, the password is encrypted in order to compare with the passwords from

1.3. Software specification

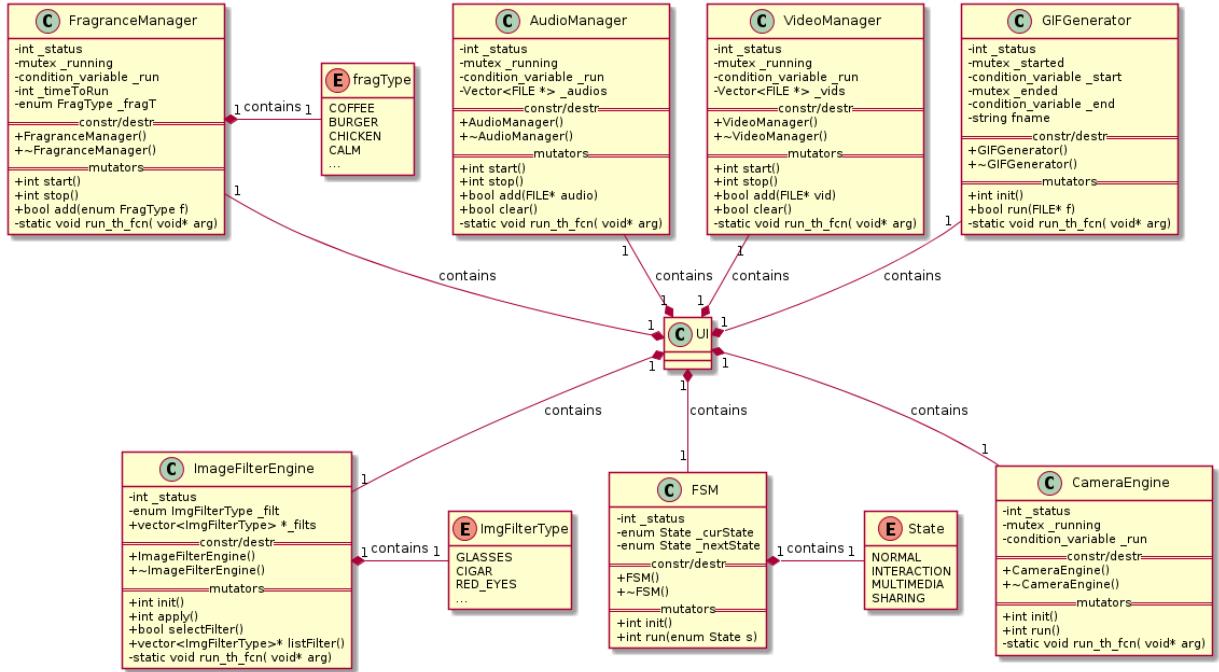


Figure 1.23.: Class diagram: Local System – part 2/2

the database (that are all encrypted). It is made a query to the users database to select a count and the role of all users that have the same username and password. If the count is equal to one, then the user has its credentials validated and it is shown the view according to its role. If not, then there's an error in the login.

In Fig. 1.26 is depicted the flowchart for registering a user. Basically, after the button being pressed and all the fields are filled, an user object is created. To know if the user can be created, it is made a query to the Users database to know if there is already an user with that username or that password. If not, then it is made another query to add that user to the users database and the registration is complete.

In Fig. 1.27 is depicted a flowchart of the delete user feature. Basically, the user is deleted using its id, and for that it is made a query to the users database to delete the row with that user id. After that query, the delete process is completed

In Fig. 1.28 is the flowchart of how it behaves the rent ad feature. Basically an ad object is created and added to the timetable object. After that, it is made a query to the time table database to add the ad to the specific time slots. Then, if everything occurs as expected, the Ad is then added to the database by a query. If that query don't occur as expected, then the timetable previously added needs to be removed from the database.

1.7. Test cases

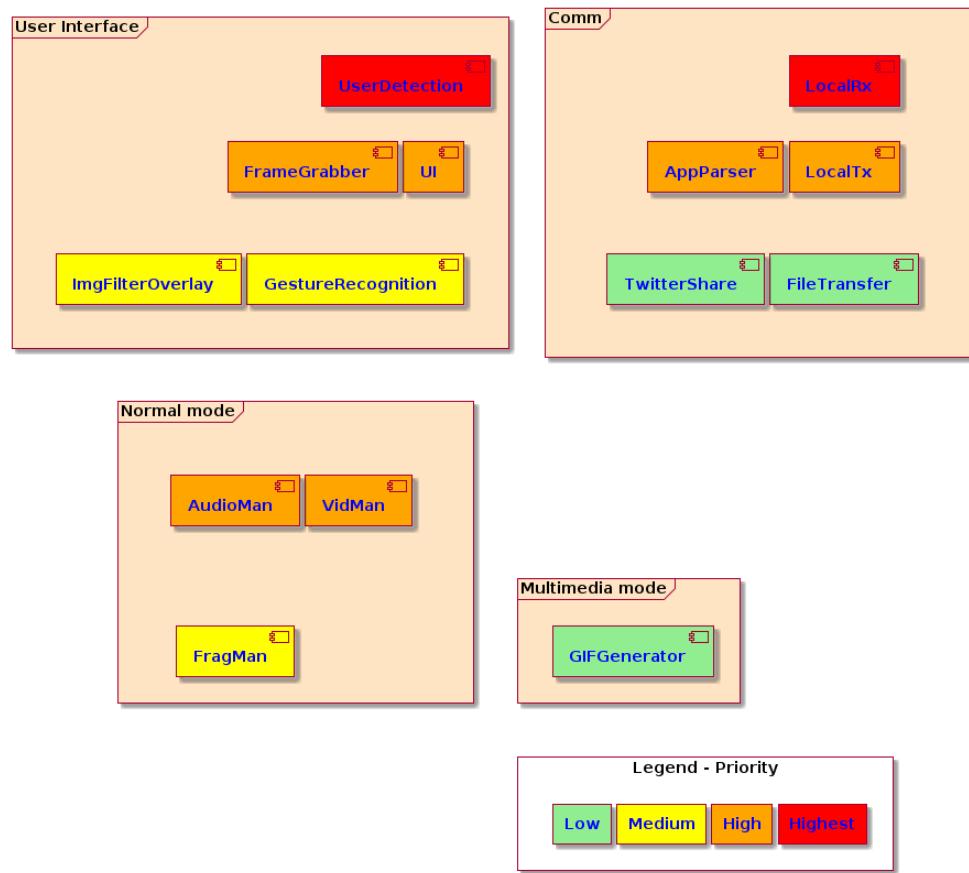


Figure 1.24.: Thread specification: Local System

1.4. Software interfaces definition

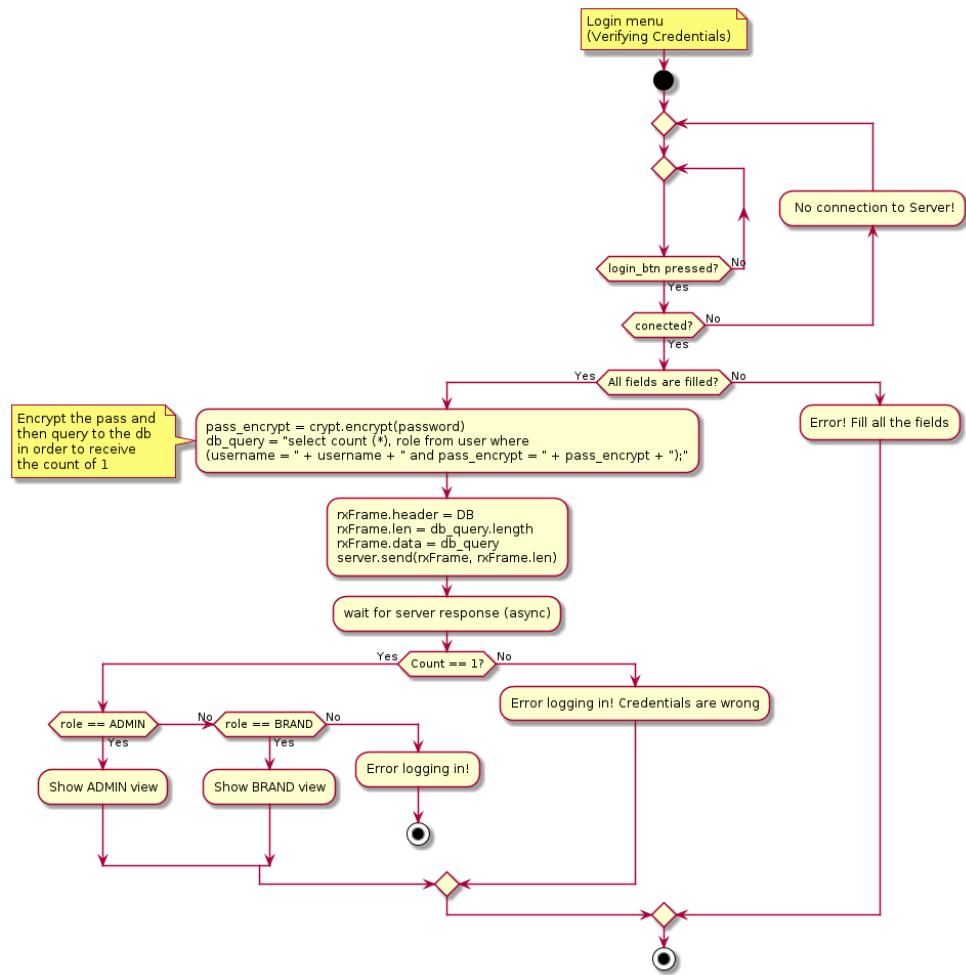


Figure 1.25.: Flowchart: Remote Client – Login

1.4. Software interfaces definition

1.5. Start-up/shutdown process specification

1.6. Error handling specification

1.7. Test cases

1.7.1. Remote Client

1.7.2. Remote Server

1.7.3. Local System

1.7. Test cases

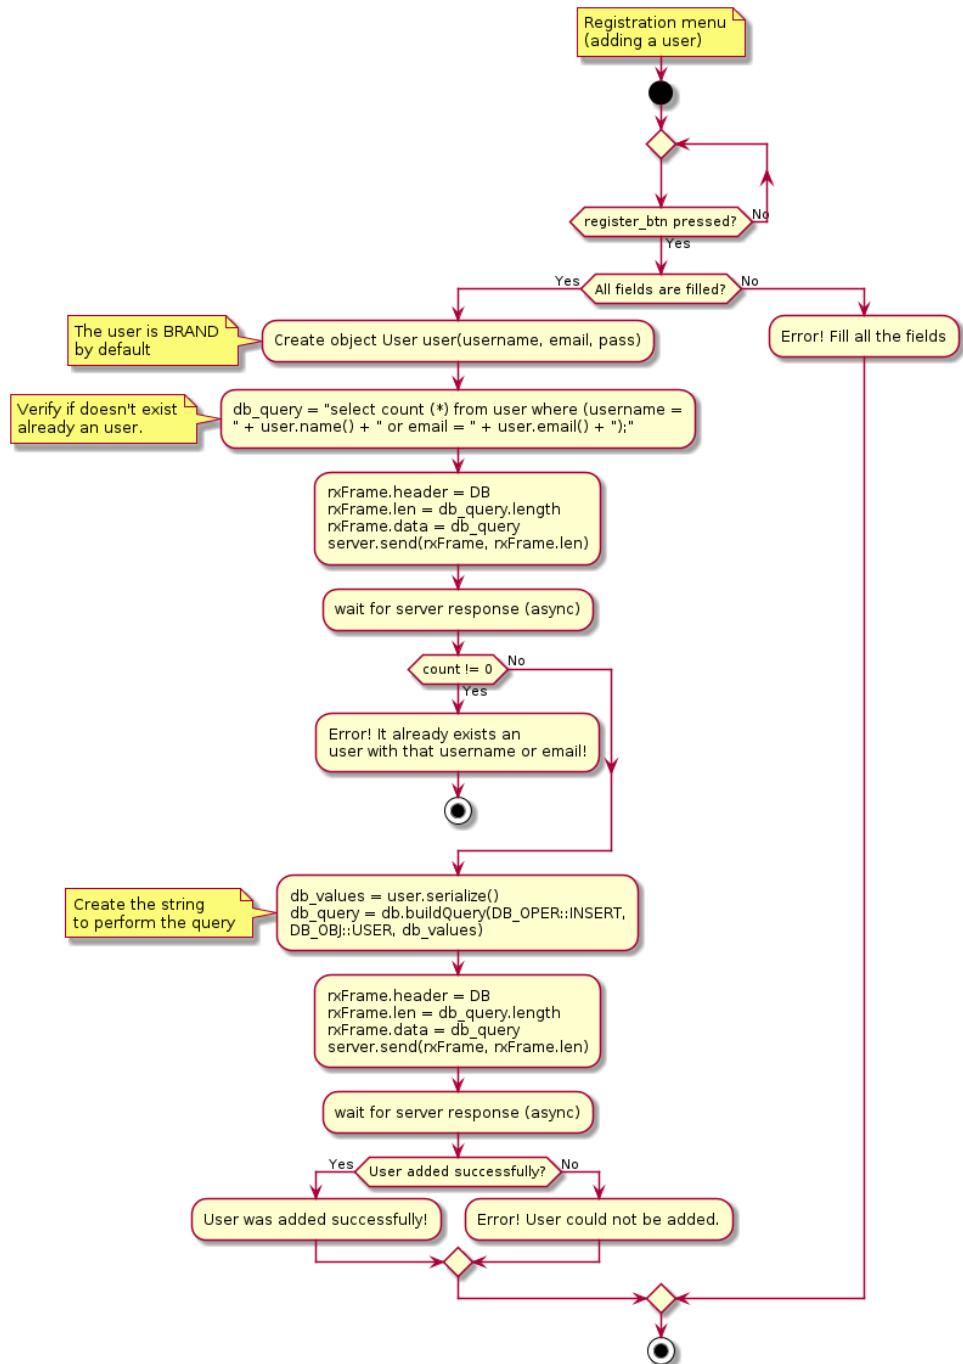


Figure 1.26.: Flowchart: Remote Client – Register

1.7. Test cases

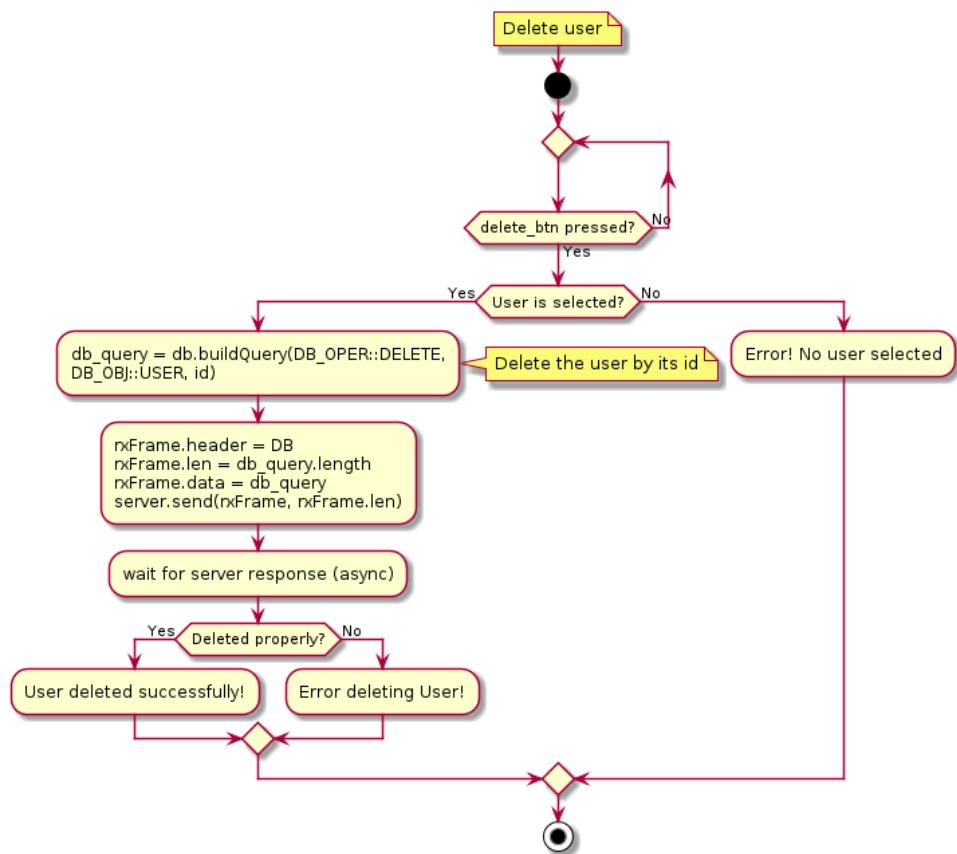


Figure 1.27.: Flowchart: Remote Client – Delete User

1.7. Test cases

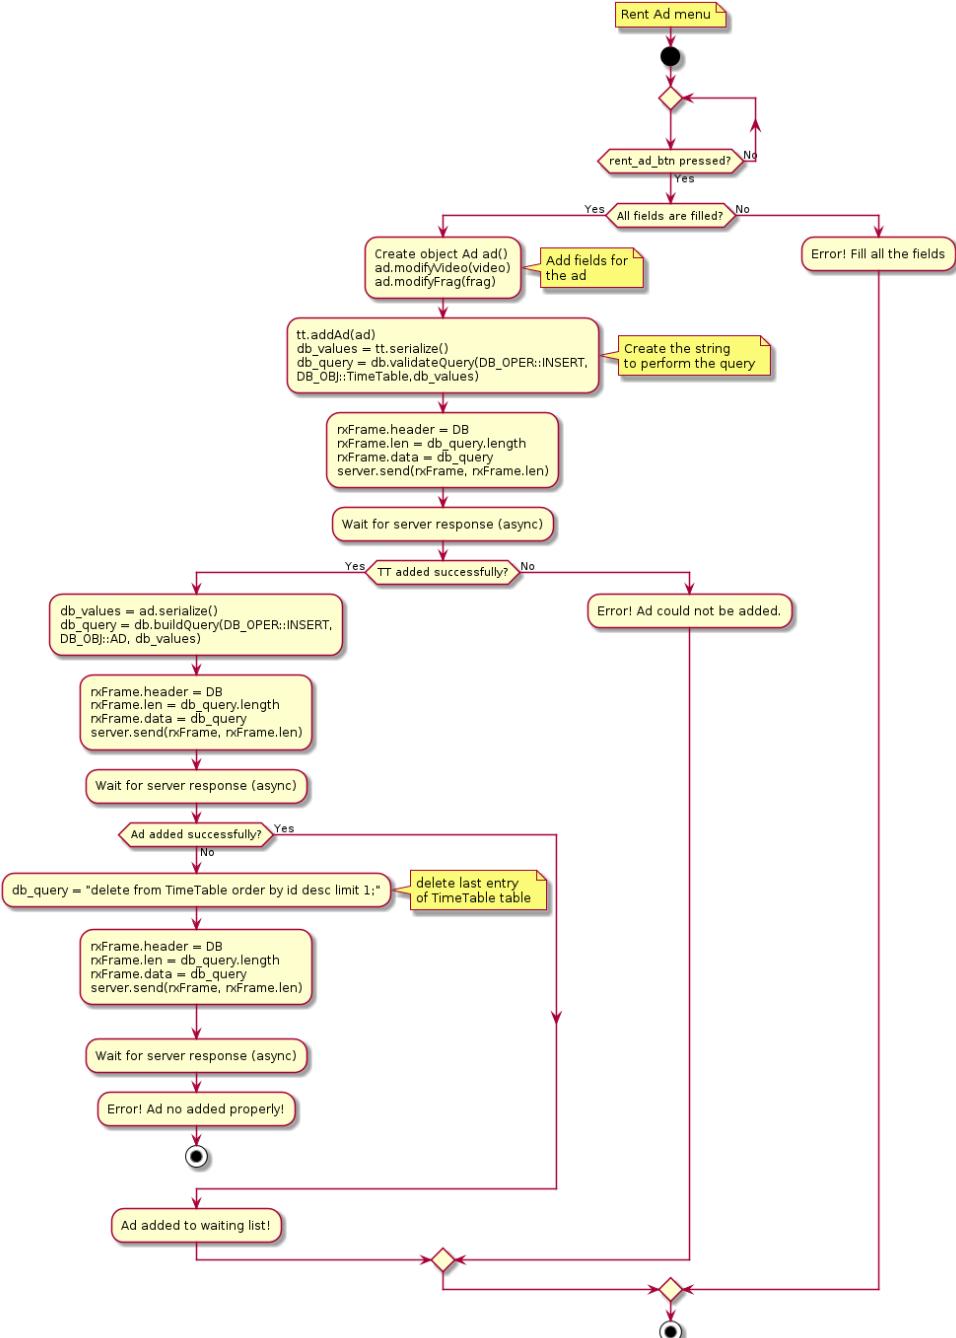


Figure 1.28.: Flowchart: Remote Client – Rent Ad

1.7. Test cases

Table 1.4.: Remote Client Test Cases

Use Case	Type of test	Description	Expected Result
Register	Functional	One will try to make a new register as a Brand	If the User is created and added to the database, everything is in order
Login	Functional	One will try to Login through its user and password.	If the login is successful, everything is working as expected.
Logout	Functional	One will try to log out from the account.	If it returns to the login page, it works.
Manage User	Functional	One will manage a user removing it or giving him privileges as Admin.	If the user is removed from the DB or has privileges as admin, it works well.
Manage Station	Functional	One will try to manage a station by powering on/off, manage ads or enable/disable ad.	If the information is updated and the station reacts to the commands, the system is working well.
Test Operation	Functional	One will choose to test the operation of the machine.	If a command line is provided with the remote server, it works properly.
Display Rented Ads	Functional	One will try to display the rented ads by the user in case.	If there are displayed all the ads of that brand, then everything works properly.
Rent Ads	Functional	One will try to rent ads as a brand, inserting all data necessary.	If the remote client responds in order, saving all data in the DB, it works well.
See Notifications	Functional	One will try to watch the notifications of a brand.	If the brand has notifications, it should be displayed. This means that it works.

1.7. Test cases

Table 1.5.: Remote Server Test Cases

Use Case	Type of test	Description	Expected Result
Disconnect	Functional	One will try to disconnect.	It has to disconnect successfully.
Authenticate User	Functional	One will try to authenticate a user already present in the database.	The server needs to respond in order: accept authentication or decline if failed.
Help	Functional	One will try to get help.	Information to help the user should be provided.
Interact with databases	Functional	One will try to query a database, reading, modifying, adding or deleting something.	If the database is correctly updated according to the command, then it works.
Test Operation			
Manage User	Functional	One will manage a user removing it or giving him privileges as Admin.	If the user is removed from the DB or has privileges as admin, it works well.
Manage Audio	Functional	One will try to manage the audio, playing an audio file that is present on the database.	The server must send the information of the audio to play to the local system. If it works, then it is verified.
Manage Video	Functional	One will try to manage the video, playing a video file that is present on the database.	The server must send the information of the video to play to the local system. If it works, then it is verified.
Manage Fragrance	Functional	One will try to activate a fragrance diffusion to the machine.	If the server sends the right information to the LS, then the LS should diffuse the fragrance.
Manage Camera	Functional	One will try to manage the camera with its various features (turn on/off, facial recognition, take GIF, take picture apply filter).	If the remote server sends the right info, then the local system should actuate in the camera according to the function that was requested to operate.
Share	Functional	One will try to share some file through social media.	If the LS responds correctly to that command, then it is working properly.

1.7. Test cases

Table 1.6.: Local System Test Cases

Use Case	Type of test	Description	Expected Result
Establish Connection	Functional	One will try to establish connection to the machine	If the connection is established and the credentials are verified, everything works.
End remote Connection	Functional	One will try to end the remote connection.	If the connection is ended correctly, then it works as expected.
Select Image Filter	Functional	One will try to select an image filter and use it.	It has to apply correctly the facial detection and also apply correctly the filter.
Take Picture	Functional	One will try to take a picture.	The Local System has to take the picture and store it in order to behave properly.
Create GIF	Functional	One will try to create a GIF.	The Local System has to generate the GIF and store it in order to work properly.
Share on social media	Functional	One will try to share a picture or a GIF on social media.	If the Local System shares to the social media the picture or the GIF, it works.
Diffuse Fragrance	Functional	One will try to diffuse the fragrance.	If the fragrance is diffused, it works.
Play Video	Functional	One will try to play one video of an ad or something else.	If the video plays properly, then the machine is working as predicted.
Play Audio	Functional	One will try to play a random audio.	If the video audio plays properly, then the machine is working as predicted.
Process Commands	Functional	One will try to send some commands for the machine to process.	If the machine receives the commands properly and processes them, then it works well.
Detect Face	Functional	One will trigger the machine to detect the face of a user.	The face will be detected if the machine is working properly.
Recognize Gesture	Functional	One will make gestures to the camera in order to see the machine behavior.	The machine will recognize the gestures and act according to the gesture made.
Update Internal DBs	Functional	One will try to play an ad or diffuse a fragrance one more time.	The machine should update the number of times the ad was played or the percentage of fragrance that is still in the slot (in the DBs).

Bibliography

- [1] Fei Tao, Meng Zhang, and A.Y.C. Nee. Chapter 12 - digital twin, cyber–physical system, and internet of things. In Fei Tao, Meng Zhang, and A.Y.C. Nee, editors, Digital Twin Driven Smart Manufacturing, pages 243–256. Academic Press, 2019. ISBN 978-0-12-817630-6. doi: <https://doi.org/10.1016/B978-0-12-817630-6.00012-6>. URL <https://www.sciencedirect.com/science/article/pii/B9780128176306000126>.
- [2] What the nose knows. URL <https://news.harvard.edu/gazette/story/2020/02/how-scent-emotion-and-memory-are-intertwined-and-exploited/>. accessed: 2021-10-23.
- [3] Martin Lindstrom. Brand sense: How to build powerful brands through touch, taste, smell, sight and sound. Strategic Direction, 2006.
- [4] Digital outdoor advertising: The what, the why, the how. URL <https://bubbleoutdoor.com/digital-outdoor-advertising-what-why-how/>. accessed: 2021-10-24.
- [5] Digital outdoor market to be worth \$55 Billions (BN) in 5 years. URL <https://www.decisionmarketing.co.uk/news/digital-outdoor-market-to-be-worth-55bn-in-5-years>. accessed: 2021-10-24.
- [6] Scent marketing; type of sensory marketing targeted at the olfactory sense, . URL <https://www.air-aroma.com/scent-marketing/>. accessed: 2021-10-24.
- [7] Scent basics: What is scent marketing, scent branding and ambient scent, . URL <https://reedpacificmedia.com/scent-basics-what-is-scent-marketing-scent-branding-and-ambient-scent/>. accessed: 2021-10-24.
- [8] Digital scent technology market with covid-19 impact analysis, . URL <https://www.marketsandmarkets.com/Market-Reports/digital-scent-technology-market-118670062.html>. accessed: 2021-10-24.

BIBLIOGRAPHY

- [9] Ian Sommerville. Software process models. *ACM computing surveys (CSUR)*, 28(1):269–271, 1996.
- [10] Michael A Cusumano and Stanley A Smith. Beyond the waterfall: Software development at microsoft. 1995.
- [11] Bernd Bruegge and Allen H Dutoit. *Object-Oriented Software Engineering Using UML, Patterns and Java-(Required)*, volume 2004. Prentice Hall, 2004.
- [12] DICK AUTOR BUTTLAR, Bradford Nichols, Dick Buttlar, Jacqueline Farrell, and Jackie Farrell. *Pthreads programming: A POSIX standard for better multiprocessing.* " O'Reilly Media, Inc.", 1996.
- [13] Michael Kerrisk. *The Linux programming interface: a Linux and UNIX system programming handbook*. No Starch Press, 2010.
- [14] E Bryan Carne. *A professional's guide to data communication in a TCP/IP world*. Artech House, 2004.
- [15] Gary R Wright and W Richard Stevens. *Tcp/ip illustrated. vol. 2: The implementation.* *tii*, 1995.
- [16] Albert S Huang and Larry Rudolph. *Bluetooth essentials for programmers*. Cambridge University Press, 2007.
- [17] M David Hanson. The client/server architecture. In *Server Management*, pages 17–28. Auerbach Publications, 2000.
- [18] Client/server model. URL https://www.ibm.com/support/knowledgecenter/en/SSAL2T_8.1.0/com.ibm.cics.tx.doc/concepts/c_clnt_sevr_model.html. accessed: 2020-07-02.
- [19] Prof. Adriano Tavares & Prof. Mongkol. Daemons class slides, 2021.
- [20] Device drivers: Why they're important and how to work with them. URL <https://www.lifewire.com/what-is-a-device-driver-2625796>. accessed: 2021-12-1.
- [21] Prof. Adriano Tavares & Prof. Mongkol. Linux + ddrivers class slides, 2021.
- [22] Richard M Stallman and Roland McGrath. *GNU Make: A Program for Directing Recompilation: GNU Make Version 3.79*. 1. Free software foundation, 2002.
- [23] Peter Baker. Using gnu make to manage the workflow of data analysis projects. *Journal of Statistical Software*, 94(1):1–46, 2020.

BIBLIOGRAPHY

- [24] Eric S Raymond. The art of Unix programming. Addison-Wesley Professional, 2003.
- [25] Arnold Robbins. Unix in a Nutshell. "O'Reilly Media, Inc.", 2005.
- [26] An overview over build systems (mostly over c++ projects), 2018. URL <https://julienjorge.medium.com/an-overview-of-build-systems-mostly-for-c-projects-ac9931494444>. accessed: 2021-12-1.
- [27] Gnu automake manual, 2021. URL <https://www.gnu.org/software/automake/manual/automake.html>. accessed: 2021-12-1.
- [28] Source code documentation best practices, 2017. URL <https://easternpeak.com/blog/source-code-documentation-best-practices/>. accessed: 2021-12-2.
- [29] Doxygen, . URL <https://www.doxygen.nl/index.html>. accessed: 2021-12-2.
- [30] Doxygen: Documenting the code, . URL <https://www.doxygen.nl/manual/docblocks.html>. accessed: 2021-12-2.
- [31] Tengteng Wen, Dehan Luo, Yongjie Ji, and Pingzhong Zhong. Development of a piezoelectric-based odor reproduction system. Electronics, 8(8):870, 2019.
- [32] What's the difference between an ultrasonic diffuser and a nebulizing diffuser. URL <https://www.aromaoutfitters.com/whats-the-difference-between-an-ultrasonic-diffuser-and-a-nebulizing-diffuser/>. accessed: 2021-12-5.
- [33] Saad Hameed Abid, Zhiyong Li, Renfa Li, and Jumana Waleed. A novel olfactory displays' scent dispersing module. International Journal of Hybrid Information Technology, 8(1):435–442, 2015.
- [34] 113khz d20mm ultrasonic mist maker atomizing fogger humidifier module w/ pcb. URL <https://shorturl.at/hlxFQ>. accessed: 2021-12-6.
- [35] Make your own super simple ultrasonic mist maker. URL <https://www.instructables.com/Make-Your-Own-Super-Simple-Ultrasonic-Mist-Maker/>. accessed: 2021-12-6.
- [36] Adrian Kaehler and Gary Bradski. Learning OpenCV 3: computer vision in C++ with the OpenCV library. " O'Reilly Media, Inc.", 2016.
- [37] Top 10 computer vision frameworks you need to know in 2021. URL <https://roboticsbiz.com/top-10-computer-vision-frameworks-you-need-to-know-in-2020/>. accessed: 2021-11-21.

BIBLIOGRAPHY

- [38] Shuo Yang, Ping Luo, Chen-Change Loy, and Xiaoou Tang. Wider face: A face detection benchmark. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 5525–5533, 2016.
- [39] Ming-Hsuan Yang, David J Kriegman, and Narendra Ahuja. Detecting faces in images: A survey. *IEEE Transactions on pattern analysis and machine intelligence*, 24(1):34–58, 2002.
- [40] Cha Zhang and Zhengyou Zhang. A survey of recent advances in face detection. 2010.
- [41] Paul Viola and Michael J Jones. Robust real-time face detection. *International journal of computer vision*, 57(2):137–154, 2004.
- [42] Jianguo Li and Yimin Zhang. Learning surf cascade for fast and accurate object detection. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3468–3475, 2013.
- [43] Navneet Dalal and Bill Triggs. Histograms of oriented gradients for human detection. In *2005 IEEE computer society conference on computer vision and pattern recognition (CVPR'05)*, volume 1, pages 886–893. Ieee, 2005.
- [44] Pedro F Felzenszwalb, Ross B Girshick, David McAllester, and Deva Ramanan. Object detection with discriminatively trained part-based models. *IEEE transactions on pattern analysis and machine intelligence*, 32(9):1627–1645, 2009.
- [45] Piotr Dollár, Christian Wojek, Bernt Schiele, and Pietro Perona. Pedestrian detection: A benchmark. In *2009 IEEE Conference on Computer Vision and Pattern Recognition*, pages 304–311. IEEE, 2009.
- [46] Bin Yang, Junjie Yan, Zhen Lei, and Stan Z Li. Aggregate channel features for multi-view face detection. In *IEEE international joint conference on biometrics*, pages 1–8. IEEE, 2014.
- [47] Haoxiang Li, Zhe Lin, Xiaohui Shen, Jonathan Brandt, and Gang Hua. A convolutional neural network cascade for face detection. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 5325–5334, 2015.
- [48] Shuo Yang, Ping Luo, Chen-Change Loy, and Xiaoou Tang. From facial parts responses to face detection: A deep learning approach. In *Proceedings of the IEEE international conference on computer vision*, pages 3676–3684, 2015.
- [49] Face detection tips, suggestions and best-practices. URL <https://www.pyimagesearch.com/2021/04/26/face-detection-tips-suggestions-and-best-practices/>. accessed: 2021-11-22.

BIBLIOGRAPHY

- [50] Paul Viola and Michael Jones. Rapid object detection using a boosted cascade of simple features. In *Proceedings of the 2001 IEEE computer society conference on computer vision and pattern recognition. CVPR 2001*, volume 1, pages I–I. Ieee, 2001.
- [51] Cascade classifier. URL https://docs.opencv.org/3.4/db/d28/tutorial_cascade_classifier.html. accessed: 2021-11-22.
- [52] Haar cascades, explained. URL https://docs.opencv.org/3.4/db/d28/tutorial_cascade_classifier.html. accessed: 2021-11-22.
- [53] H Aashni, S Archanasri, A Nivedhitha, P Shristi, and SN Jyothi. International conference on advances in computing & communications. *Science Direct*, 115:367–374, 2017.
- [54] Mais Yasen and Shaidah Jusoh. A systematic review on hand gesture recognition techniques, challenges and applications. *PeerJ Computer Science*, 5:e218, 2019.
- [55] SG Vaibhavi, AK Akshay, NR Sanket, AT Vaishali, and SS Shabnam. A review of various gesture recognition techniques. *International Journal of Engineering and Computer Science*, 3:8202–8206, 2014.
- [56] Ananya Choudhury, Anjan Kumar Talukdar, and Kandarpa Kumar Sarma. A review on vision-based hand gesture recognition and applications. In *Intelligent applications for heterogeneous system modeling and design*, pages 256–281. IGI Global, 2015.
- [57] Taining a neural network to detect gestures with opencv in python, . URL <https://towardsdatascience.com/training-a-neural-network-to-detect-gestures-with-opencv-in-python-e09b0a12b0>. accessed: 2021-11-28.
- [58] Munir Oudah, Ali Al-Naji, and Javaan Chahl. Hand gesture recognition based on computer vision: a review of techniques. *journal of Imaging*, 6(8):73, 2020.
- [59] Raghu Ramakrishnan, Johannes Gehrke, and Johannes Gehrke. *Database management systems*, volume 3. McGraw-Hill New York, 2003.
- [60] Crow's foot notation. URL <https://vertabelo.com/blog/crow-s-foot-notation/>. accessed: 2021-11-29.
- [61] Which modern database is right for your use case? URL <https://www.xplenty.com/blog/which-database/>. accessed: 2021-11-30.

BIBLIOGRAPHY

- [62] Sqlite vs mysql – what's the difference, . URL <https://www.hostinger.com/tutorials/sqlite-vs-mysql-whats-the-difference/>. accessed: 2021-11-30.
- [63] Carlos Coronel and Steven Morris. Database systems: design, implementation, & management. Cengage Learning, 2016.
- [64] Mysql connectors and apis, . URL <https://dev.mysql.com/doc/index-connectors.html>. accessed: 2021-11-30.
- [65] Mysql c++ connector: Intro, . URL <https://dev.mysql.com/doc/connector-cpp/8.0/en/connector-cpp-introduction.html#connector-cpp-benefits>. accessed: 2021-11-30.
- [66] Mysql c++ connector: Example 1, . URL <https://dev.mysql.com/doc/connector-cpp/1.1/en/connector-cpp-examples-complete-example-1.html>. accessed: 2021-11-31.
- [67] The beginner's guide to motion sensors, . URL <https://www.safewise.com/resources/motion-sensor-guide/>. accessed: 2021-12-6.
- [68] Understanding how ultrasonic sensors work, . URL <https://www.linearmotiontips.com/ultrasonic-sensors-for-linear-position-and-distance-measuring/>. accessed: 2021-12-6.
- [69] Understanding how ultrasonic sensors work, . URL <https://www.maxbotix.com/articles/how-ultrasonic-sensors-work.htm>. accessed: 2021-12-6.
- [70] How to spot the biscuit thief with raspberry pi and c++, . URL <https://www.rs-online.com/designspark/beginners-guide-to-computer-vision-with-raspberry-pi-4>. accessed: 2021-12-6.
- [71] What are video encoding formats? | video formats, . URL <https://www.cloudflare.com/learning/video/video-encoding-formats/>. accessed: 2021-12-8.
- [72] Using your raspberry pi as a video player, . URL <https://pimylifeup.com/raspberry-pi-video-player/>. accessed: 2021-12-8.
- [73] Working with video using opencv and qt, . URL <http://codingexodus.blogspot.com/2012/12/working-with-video-using-opencv-and-qt.html>. accessed: 2021-12-9.
- [74] Give hermione granger a cool pair of glasses by building snapchat filter using opencv. URL <https://www.analyticsvidhya.com/blog/2021/07/give-hermione-granger-a-cool-pair-of-glasses-by-building-snapchat-filter-using-opencv/>. accessed: 2021-12-10.

BIBLIOGRAPHY

- [75] Graphics interchange format (gif) specification. URL <https://www.w3.org/Graphics/GIF/spec-gif87.txt>. accessed: 2021-12-10.
- [76] John Miano. Compressed image file formats: Jpeg, png, gif, xbm, bmp. Addison-Wesley Professional, 1999.
- [77] Imagemagick. URL <https://imagemagick.org/index.php>. accessed: 2021-12-10.
- [78] Magickwand, . URL <https://imagemagick.org/script/magick-wand.php>. accessed: 2021-12-10.
- [79] Magickcore, . URL <https://imagemagick.org/script/magick-core.php>. accessed: 2021-12-10.
- [80] Magick++, . URL <https://imagemagick.org/script/magick++.php>. accessed: 2021-12-10.
- [81] Magick++ | documentation, . URL <https://www.imagemagick.org/Magick++/Documentation.html>. accessed: 2021-12-10.
- [82] Top 10 social media apis: Twitter, facebook, instagram, and many more. URL <https://medium.com/rakuten-rapidapi/top-10-social-media-apis-twitter-facebook-instagram-and-many-more-5c13262c61fe>. accessed: 2021-12-7.
- [83] Top 10 social media apis for developers. URL <https://www.ayrshare.com/top-10-social-media-apis-for-developers/>. accessed: 2021-12-7.
- [84] Getting started with the twitter api | docs | twitter developer platform, . URL <https://developer.twitter.com/en/docs/twitter-api/getting-started/about-twitter-api>. accessed: 2021-12-8.
- [85] Getting access to the twitter api | docs | twitter developer platform, . URL <https://developer.twitter.com/en/docs/twitter-api/getting-started/getting-access-to-the-twitter-api>. accessed: 2021-12-8.
- [86] What is a rest api? URL <https://www.redhat.com/en/topics/api/what-is-a-rest-api>. accessed: 2021-12-8.
- [87] Make your first request | docs | twitter developer platform, . URL <https://developer.twitter.com/en/docs/twitter-api/getting-started/make-your-first-request>. accessed: 2021-12-8.
- [88] Manage tweets: Introduction | docs | twitter developer platform, . URL <https://developer.twitter.com/en/docs/twitter-api/tweets/manage-tweets/introduction>. accessed: 2021-12-8.

BIBLIOGRAPHY

- [89] Manage tweets: Introduction | docs | twitter developer platform, . URL <https://developer.twitter.com/en/docs/twitter-api/tweets/manage-tweets/quick-start>. accessed: 2021-12-8.
- [90] Post tweets – api reference | docs | twitter developer platform, . URL <https://developer.twitter.com/en/docs/twitter-api/tweets/manage-tweets/api-reference/post-tweets>. accessed: 2021-12-8.
- [91] curl. URL <https://curl.se/>. accessed: 2021-12-8.
- [92] Creating twitter libraries in c++, . URL <https://blog.hashtagify.me/2020/03/18/creating-twitter-libraries-in-c/>. accessed: 2021-12-8.
- [93] libcurl | the multiprotocol file transfer library, . URL <https://curl.se/libcurl/>. accessed: 2021-12-8.
- [94] libcurl bindings, . URL <https://curl.se/libcurl/bindings.html>. accessed: 2021-12-8.
- [95] twitcurl | github repository, . URL <https://github.com/swatkat/twitcurl>. accessed: 2021-12-8.
- [96] C++ ui libraries. URL https://philippegroarke.com/posts/2018/c++_ui_solutions/. accessed: 2021-12-2.
- [97] Qt framework and qml, . URL <https://www.sam-solutions.com/blog/qt-framework/>. accessed: 2021-12-1.
- [98] The building blocks of qt, . URL <https://www.qt.io/product/frameworkhttps://www.qt.io/product/framework>. accessed: 2021-12-2.
- [99] Signals & slots | qt core 5.15.7, . URL <https://doc.qt.io/qt-5/signalsandslots.html>. accessed: 2021-12-2.
- [100] Coffee machine example, . URL <https://doc.qt.io/qt-5/qtdoc-demos-coffee-example.html>. accessed: 2021-12-2.
- [101] Embedded linux – working with qt, . URL <https://devarea.com/embedded-linux-working-with-qt/#Ya3vmWjP0kl>. accessed: 2021-12-6.
- [102] What are the top file transfer protocols? URL <https://www.goanywhere.com/blog/what-are-the-top-file-transfer-protocols>. accessed: 2021-12-8.
- [103] Cisco. Transferring files using http or https. <https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/ifs/configuration/xe-16/ifs-xe-16-book/ifs-file-trans-http.pdf>, 2018. accessed: 2021-12-08.

BIBLIOGRAPHY

- [104] Transfer sh website, . URL <https://transfer.sh>. accessed: 2021-12-10.
- [105] Raspberry pi 4 tech specs, . URL <https://www.raspberrypi.com/products/raspberry-pi-4-model-b/specifications/>. accessed: 2021-12-11.
- [106] How hc-sr04 ultrasonic sensor works & interface it with arduino, . URL <https://lastminuteengineers.com/arduino-sr04-ultrasonic-sensor-tutorial/>. accessed: 2021-12-11.
- [107] Micro usb ultrasonic atomizing humidifier module fogger mist generator uk. URL <https://www.ebay.co.uk/itm/203635455945?hash=item2f699e77c9:g:j-cAAOSwE75hVti0>. accessed: 2021-12-11.
- [108] Raspberry pi camera module 2, . URL <https://www.raspberrypi.com/products/camera-module-v2/>. accessed: 2021-12-11.
- [109] 10.1 inch hdmi screen lcd display with audio driver board monitor for raspberry pi banana/orange pi mini computer. URL [https://www.aliexpress.com/item/33005274109.html?spm=a2g0o.detail.1000013.3.38072ea5MrfWq9&gps-id=pcDetailBottomMoreThisSeller&scm=1007.13339.169870.0&scm_id=1007.13339.169870.0&scm-url=1007.13339.169870.0&pvid=e1784609-f2f3-4547-9d9e-d5461fddc4c8&_t=gps-id:pcDetailBottomMoreThisSeller,scm-url:1007.13339.169870.0,pvid:e1784609-f2f3-4547-9d9e-d5461fddc4c8,tpp_buckets:668%232846%238110%231995&&pdp_ext_f=%7B"sceneld":"3339","sku_id":"12000023440173741"%7D](https://www.aliexpress.com/item/33005274109.html?spm=a2g0o.detail.1000013.3.38072ea5MrfWq9&gps-id=pcDetailBottomMoreThisSeller&scm=1007.13339.169870.0&scm_id=1007.13339.169870.0&scm-url=1007.13339.169870.0&pvid=e1784609-f2f3-4547-9d9e-d5461fddc4c8&_t=gps-id:pcDetailBottomMoreThisSeller,scm-url:1007.13339.169870.0,pvid:e1784609-f2f3-4547-9d9e-d5461fddc4c8,tpp_buckets:668%232846%238110%231995&&pdp_ext_f=%7B). accessed: 2021-12-11.
- [110] Passive vs. active speakers, which is right for you? URL <https://www.aperionaudio.com/blogs/aperion-audio-blog/passive-vs-active-speakers>. accessed: 2021-12-11.
- [111] 5w speaker - para display (h). URL <https://www.botnroll.com/pt/colunas-sirenes/2726-5w-speaker-para-display-h.html>. accessed: 2021-12-11.
- [112] Carregador 4x usb 5v / 2,4a (branco) - fonestar. URL <https://www.castroelectronica.pt/product/carregador-4x-usb-5v-24a-branco--fonestar>. accessed: 2021-12-11.
- [113] Raspberry pi 4 pinout, . URL <https://www.the-diy-life.com/raspberry-pi-4-pinout/>. accessed: 2021-12-13.

Appendices

A. Project Planning – Gantt diagram

In Fig. A.1 is illustrated the Gantt chart for the project, containing the tasks' descriptions.

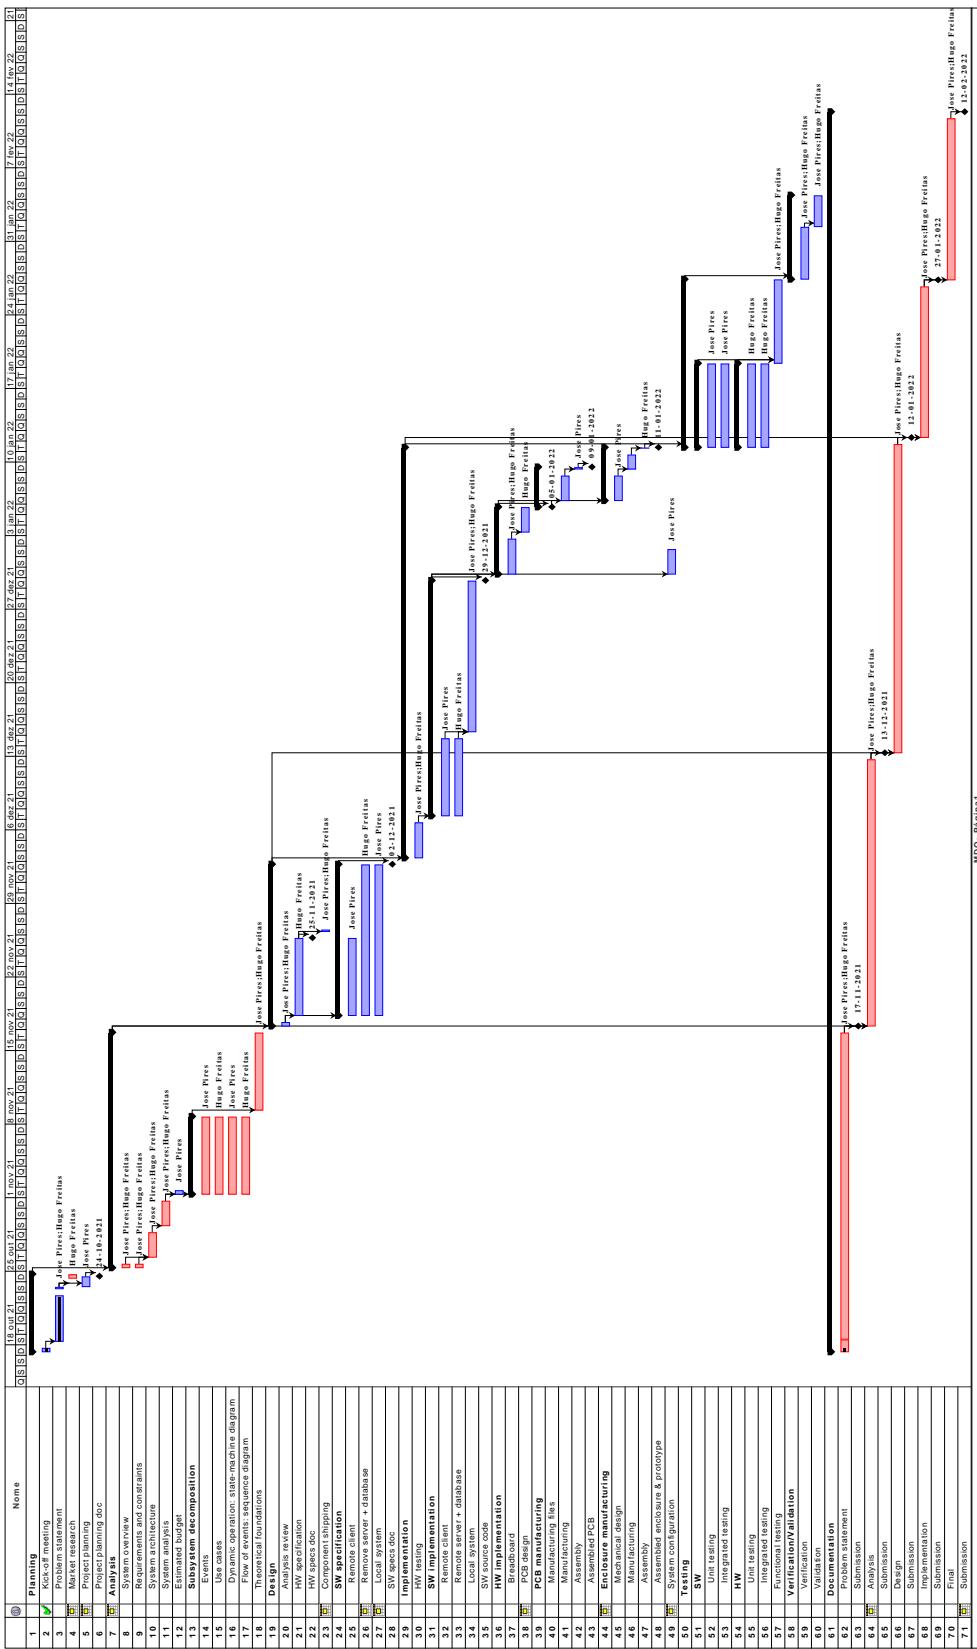


Figure A.1.: Project planning – Gantt diagram