



University of Minho  
School of Engineering  
Electronics Engineering department  
Embedded systems

Project: Report

# Marketing Digital Outdoor with gesture interaction — Problem statement

Group 8

José Pires      A50178

Hugo Freitas    A88258

Supervised by:

Professor Tiago Gomes

Professor Ricardo Roriz

Professor Sérgio Pereira

November 9, 2021

# Contents

|                                   |            |
|-----------------------------------|------------|
| <b>Contents</b>                   | <b>i</b>   |
| <b>List of Figures</b>            | <b>iii</b> |
| <b>List of Abbreviations</b>      | <b>iv</b>  |
| <b>1 Introduction</b>             | <b>1</b>   |
| 1.1 Context and motivation        | 1          |
| 1.2 Problem statement             | 2          |
| 1.3 Market research               | 2          |
| 1.4 Project goals                 | 3          |
| 1.5 Project planning              | 4          |
| 1.6 Report Outline                | 5          |
| <b>2 Analysis</b>                 | <b>7</b>   |
| 2.1 Requirements and Constraints  | 7          |
| 2.1.1 Functional requirements     | 7          |
| 2.1.2 Non-functional requirements | 8          |
| 2.1.3 Technical constraints       | 8          |
| 2.1.4 Non-technical constraints   | 8          |
| 2.2 System overview               | 8          |
| 2.2.1 MDO Remote Client           | 9          |
| 2.2.2 MDO Remote Server           | 10         |
| 2.2.3 MDO Local system            | 10         |
| 2.3 System architecture           | 11         |
| 2.3.1 Hardware architecture       | 11         |
| 2.3.2 Software architecture       | 12         |
| 2.4 Subsystem decomposition       | 15         |

## Contents

---

|   |               |           |
|---|---------------|-----------|
| 2.4.1                                     | Remote Client | 16        |
| 2.4.2                                     | Remote server | 21        |
| 2.4.3                                     | Local system  | 21        |
| <b>Bibliography</b>                       |               | <b>35</b> |
| <b>Appendices</b>                         |               | <b>36</b> |
| <b>A Project Planning — Gantt diagram</b> |               | <b>37</b> |

# List of Figures

|      |   |    |
|------|---|----|
| 1.1  | Example of a Digital Outdoor, withdrawn from [4]                                    | 3  |
| 1.2  | Attractive Opportunities in the Digital Scent Technology Market, withdrawn from [8] | 4  |
| 2.1  | Marketing Digital Outdoor (MDO) system overview                                     | 9  |
| 2.2  | Hardware (HW) architecture diagram  | 11 |
| 2.3  | Software (SW) architecture diagram: remote client                                   | 13 |
| 2.4  | SW architecture diagram: remote server  | 14 |
| 2.5  | SW architecture diagram: local system   | 16 |
| 2.6  | User mockups: remote client   | 19 |
| 2.7  | Use cases: remote client  | 20 |
| 2.8  | State Machine Diagram: remote client  | 26 |
| 2.9  | State Machine Diagram: remote client communication manager                          | 27 |
| 2.10 | State Machine Diagram: remote client database manager                               | 28 |
| 2.11 | State Machine Diagram: remote client app manager                                    | 29 |
| 2.12 | User mockups: local system  | 30 |
| 2.13 | Use cases diagram: local system   | 31 |
| 2.14 | State machine diagram: local system   | 32 |
| 2.15 | State machine diagram: local system — Comm Manager                                  | 33 |
| 2.16 | State machine diagram: local system — Database (DB) Manager                         | 33 |
| 2.17 | State machine diagram: local system — Supervisor                                    | 34 |
| A.1  | Project planning — Gantt diagram  | 38 |

# List of Abbreviations

| Notation | Description                       | Page List                |
|----------|-----------------------------------|--------------------------|
| AC       | Alternating Current               | 12                       |
| API      | Application Programming Interface | 4, 12, 13, 15            |
| BN       | Billions                          | 2, 3, 35                 |
| BSP      | Board Support Package             | 13–15                    |
| CAGR     | Compound Annual Growth Rate       | 3                        |
| CLI      | Command Line Interface            | 14                       |
| COTS     | Commercial off-the-shelf          | 5                        |
| CPS      | Cyber–Physical Systems            | 1, 3                     |
| CV       | Computer Vision                   | 15                       |
| DB       | Database                          | iii, 12–15, 23–25, 33    |
| DC       | Direct Current                    | 12                       |
| DOOH     | Digital Out-Of-Home               | 2                        |
| GIF      | Graphics Interchange Format       | 2, 7, 10, 15, 17, 22, 25 |
| HW       | Hardware                          | iii, 5, 8, 11, 23        |
| IP       | Internet Protocol                 | 15, 23                   |
| MDO      | Marketing Digital Outdoor         | iii, 2, 8–10, 12         |
| MDO-L    | MDO Local System                  | 9–12, 21                 |
| MDO-RC   | MDO Remote Client                 | 9, 10, 12, 16            |
| MDO-RS   | MDO Remote Server                 | 9–12                     |

## List of Abbreviations

---

| Notation | Description                                     | Page List                    |
|----------|---|------------------------------|
| OS       | Operating System                                | 13–15                        |
| OSI      | Open Systems Interconnection                    | 13                           |
| PCB      | Printed Circuit Board                           | 5                            |
| R&D      | Research and Development                        | 3                            |
| RDBMS    | Relational Database Management System           | 14                           |
| SoC      | System-on-a-Chip                                | 12                           |
| SW       | Software  | iii, 5, 11–16                |
| TCP/IP   | Transmission Control Protocol/Internet Protocol | 9, 11, 13                    |
| UI       | User Interface                                  | 9, 10, 12, 14–<br>16, 21, 22 |

# 1. Introduction

The present work, within the scope of the Embedded Systems course, consists in the project of a Cyber–Physical Systems (CPS), i.e., a system that provides seamless integration between the cyber and physical worlds [1]. The Waterfall methodology is used for the project development, providing a systematic approach to problem solving and paving the way for project's success.

In this chapter are presented the project's context and motivation, the problem statement — clearly defining the problem, the market research — defining the product's market share and opportunities, the project goals, the project planning and the document outline.

## 1.1. Context and motivation

COVID pandemics presented a landmark on human interaction, greatly reducing the contact between people and surfaces. Thus, it is an imperative to provide people with contactless interfaces for everyday tasks. People redefined their purchasing behaviors, leading to a massive growth of the online shopping. However, some business sectors, like clothing or perfumes, cannot provide the same user experience when moving online. Therefore, one proposes to close that gap by providing a marketing digital outdoor for brands to advertise and gather customers with contactless interaction.

Scenting marketing is a great approach to draw people into stores. Olfactory sense is the fastest way to the brain, thus, providing an exceptional opportunity for marketing [2] — “75% of the emotions we generate on a daily basis are affected by smell. Next to sight, it is the most important sense we have” [3].

Combining that with additional stimuli, like sight and sound, can significantly boost the marketing outcome. Brands can buy advertisement space and time, selecting the videoclips to be displayed and the fragrance to be used at specific times, drawing the customers into their stores.

Marketing also leverages from better user experience, thus, user interaction is a must-have, providing the opportunity to interact with the customer. In this sense, when users approach the outdoor a gesture-based interface will be provided for a brand immersive experience, where the user can take pictures or create GIFs with brand specific image filters and share them through their social media, with the opportunity to gain

several benefits.

## 1.2. Problem statement

The first step of the project is to clearly define the problem, taking into consideration the problem's context and motivation and exploiting the market opportunities.

The project consists of a Marketing Digital Outdoor (MDO) with sound and video display, and fragrance emission selected by the brands, providing a gesture-based interface for user interaction to create pictures and Graphics Interchange Format (GIF)s, brand-specific, and share them on social media. It is comprised of several modes:

- normal mode (advertisement mode): the MDO will provide sound, video and fragrance outputs.
- interaction mode: When a user approaches the device, the MDO will go into interaction mode, turning on and displaying the camera feed and waiting for recognizable gestures to provide additional functionalities, such as brand-specific image filters.
- multimedia mode: in this mode the facial recognition is applied, enabling the user to select and apply different brand-specific image filters and take pictures or create a GIF.
- sharing mode: after a user take a picture or create a GIF, it can share it across social media.

Brands can buy advertisement space and time, selecting the videoclips to be displayed and the fragrance to be used at specific times, drawing the customers into their stores. Customers can be captivated by the combination of sensorial stimuli, the gesture-based interaction, the immersive user experience provided by the brands — feeling they belong in a TV advertisement, and the opportunity to gain several benefits, e.g., discount coupons.

## 1.3. Market research

A Digital Outdoor is essentially a traditional outdoor advertising powered up by technology. The pros of a digital outdoor compared to a traditional one is mostly the way that it captivates the attention of consumers in a more dynamic way. It can also change its advertisement according to certain conditions, such as weather and/or time. Some researches tells that the British public sees over 1.1 Billions (BN) digital outdoor advertisements over a week [4], which can tell how much digital marketing is valued nowadays.

When talking about numbers, "At the end of 2020, despite the Covid wipeout, the Digital Out-Of-Home (DOOH) market was estimated to be worth \$41.06 BN, but by 2026, nearly two out of three (65%) advertising executives predict this will rise to between \$50 BN and \$55 BN. A further 16% expect it to be worth between



#### 1.4. Project goals

---

\$55 BN and \$60 BN, and 14% estimate it will be even bigger” [5].



Figure 1.1.: Example of a Digital Outdoor, withdrawn from [4]

Scent market is the art of taking a company’s brand identity, marketing messages, target audience and creating a scent that amplifies these values. That’s because “a scent has the ability to influence behavior and trigger memories almost instantaneously. When smell is combined with other marketing cues, it can amplify a brand experience and establish a long lasting connection with consumers” [6].

Ambient scent uses fragrance to enhance the experience of consumers with different purposes, whereas scents in scent branding are unique to each company’s identity. According to a Samsung study: “when consumers were exposed to a company scent, shopping time was increased by 26% and they visited three times more product categories” [7]. Also, “the digital scent technology market is expected to grow from \$1.0 BN in 2021 to \$1.5 BN by 2026, at a Compound Annual Growth Rate (CAGR) of 9.2%.” [8].

The market growth can be attributed to several factors, such as expanding application and advancements in e-nose technologies, increasing use of e-nose devices for disease diagnostic applications, emerging Research and Development (R&D) activities to invent e-nose to sniff out COVID-19, and rising use of e-nose in food industry for quality assurance in production, storage, and display.

## 1.4. Project goals

The project aims to develop a CPS for multi-sensory marketing with contactless user interaction. The key goals identified and the respective path to attain them are:

1. devise a device with audio and video outputs, as well as fragrance diffusion: understand audio and video streaming and study fragrance nebulizer technologies.

## 1.5. Project planning

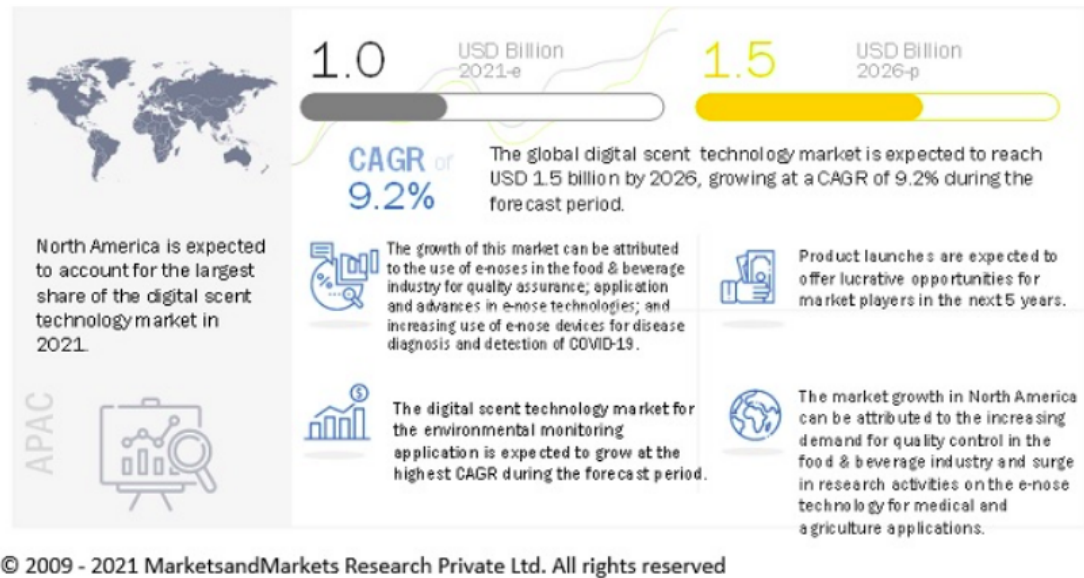


Figure 1.2.: Attractive Opportunities in the Digital Scent Technology Market, withdrawn from [8]

2. create a contactless user interface based on gestures through computer vision: identify user gestures through computer vision and match them to interface callbacks; a virtual keyboard may be required for user input.
3. devise a distributed architecture to convey brand advertisement information to the local device: understand distributed architectures and apply them for optimal data flow; create a remote client-server model to convey information from the brands to the device through remote cloud database services; devise adequate data frames to convey information to the local device; create a local server to respond to the remote server requests.
4. apply facial recognition to the camera feed and subsequently apply image filters specific to each brand: understand facial recognition algorithms and apply them to the camera feed; apply image filters on top of the identified faces through a specialized Application Programming Interface (API).
5. enable image and GIFs sharing to social media for increased brand awareness: understand how to use social media APIs for media sharing.

## 1.5. Project planning

In Appendix A is illustrated the Gantt chart for the project (Fig. A.1), containing the tasks' descriptions. It should be noted that the project follows the Waterfall project methodology, which is meant to be iterative.

The tasks are described as follows:

- Project planning: in the project planning, a brainstorming about conceivable devices takes place, whose viability is then assessed, resulting in the problem statement (Milestone 0). A market research is performed to assess the product's market space and opportunities. Finally, an initial version of the project planning is conceived to define a feasible timeline for the suggested tasks.
- Analysis: in this phase an overview of the system is conceived, presenting a global picture of the problem and a viable solution. The requirements and constraints are elicited, defining the required features and environmental restrictions on the solution. The system architecture is then derived and subsequently decomposed into subsystems to ease the development, consisting of the events, use cases, dynamic operation of the system and the flow of events throughout the system. Finally, the theoretical foundations for the project development are presented.
- Design: at this stage the analysis specification is reviewed, and the HW and SW and the respective interfaces are fully specified. The HW specification yields the respective document, enabling the component selection, preferably Commercial off-the-shelf (COTS), and shipping. The SW specification is separately performed in the subsystems identified, yielding the SW specifications documentation (milestone).
- Implementation: product implementation which is done by modular integration. The HW is tested and the SW is implemented in the target platforms, yielding the SW source code as a deliverable (milestone). The designed HW circuits are then tested in breadboards for verification and the corresponding Printed Circuit Board (PCB) is designed, manufactured and assembled. After designing the PCB, the enclosure is designed to accommodate all HW components, manufactured and assembled. Lastly, the system configuration is performed, yielding prototype alpha of the product.
- Tests: modular tests and integrated tests are performed regarding the HW and SW components and a functional testing is conducted.
- Functional Verification/Validation: System verification is conducted to validate overall function. Regarding validation, it is conducted by an external agent, where a user should try to interact with the designed prototype.
- Documentation: throughout the project the several phases will be documented, comprising several milestones, namely: problem statement; analysis; design; implementation; and final.

## 1.6. Report Outline

This report is organized as follows:

- In Chapter 1 is presented the project's context and motivation, the problem statement, the market research, the project goals, and project planning.

- In Chapter [2](#), the product requirements are derived — defining the client expectations for the product — as well as the project constraints — what the environments limits about the product. Based on the set of requirements and constraints, a system overview is produced, capturing the main features and interactions with the system, as well as its key components. Then, the system architecture is devised, comprising both hardware and software domains. Next, the system is decomposed into subsystems, presenting a deeper analysis over it, comprising its user mockups, events, use cases diagram, dynamic operation and flow of events. Finally, the theoretical foundations are outlined, providing the basic technical knowledge to undertake the project.
- Lastly, the appendices (see Section [2.4.3](#)) contain detailed information about project planning and development.

## **2. Analysis**

In the analysis phase, the product requirements are derived — defining the client expectations for the product — as well as the project constraints — what the environment limits about the product. Based on the set of requirements and constraints, a system overview is produced, capturing the main features and interactions with the system, as well as its key components.

Then, the system architecture is devised, comprising both hardware and software domains. Next, the system is decomposed into subsystems, presenting a deeper analysis over it, comprising its user mock-ups, events, use cases diagram, dynamic operation and flow of events.

Lastly, the theoretical foundations are outlined, providing the basic technical knowledge to undertake the project.

### **2.1. Requirements and Constraints**

The development requirements are divided into functional and non-functional if they pertain to main functionality or secondary one, respectively. Additionally, the constraints of the project are classified as technical or non-technical.

#### **2.1.1. Functional requirements**

- Advertising through a screen and speakers;
- Have fragrance diffusion;
- Take pictures and GIFs;
- Detect a user in range of the device;
- Contactless user interaction through gesture recognition;
- Camera feed and facial recognition;
- Apply brand-specific image filters;
- Enable sharing multimedia across social media;

- Provide a remote user interface for brands to purchase and configure the advertisements;
- Provide a remote user interface for company staff to monitor and control the MDO local system.

### 2.1.2. Non-functional requirements

- Low power consumption;
- Provide user-friendly interfaces;
- Have low latency between local system and remote server;
- Use wireless communication between the local and remote systems.

### 2.1.3. Technical constraints

- Use device drivers;
- Use Makefiles;
- Use C/C++;
- Use Raspberry Pi as the development board;
- Use compatible HW with the development board;
- Use buildroot;
- Social media APIs for sharing multimedia
- Image filtering through specialized APIs.

### 2.1.4. Non-technical constraints

- Project duration: one semester (circa 20 weeks);
- Pair work flow;
- Limited budget;
- Scale model prototype.

## 2.2. System overview

The system overview presents a global view of the system, considering its main features, components and interactions. It is not intended to be complete, but rather provide a basis for the outline of the system architecture. Fig. 2.1 presents the MDO system overview.

Considering the system interactions, three main actors were identified:

## 2.2. System overview



Figure 2.1.: MDO system overview

1. Brand: represents the brands contracting the advertisement services;
2. Administrator: the development company staff, which can monitor and control the outdoor (administrative privileges).
3. User: the user (the target audience of the advertisement) interacting with the system.

Considering the data flow across the **MDO system**, three main subsystems were identified: **MDO Remote Client (MDO-RC)**, **MDO Remote Server (MDO-RS)**, and **MDO Local System (MDO-L)**. The rationale behind this initial decomposition is explained next.

### 2.2.1. MDO Remote Client

The Brand and Administrator members require a remote User Interface (UI) (front-end) to interact with the system: the former to configure the advertisements being displayed at the MDO and purchase them; the latter to remotely monitor and control the operation of the MDO. Thus, it is clear that an authentication mechanism must be provided for the remote UI.

The data is then dispatched to the back-end, where it is processed and feed back to the UI user and/or sent to the remote server, via Transmission Control Protocol/Internet Protocol (TCP/IP) comprising the data logic component of the UI.

### 2.2.2. MDO Remote Server

Although the MDO-RC could communicate directly with the MDO-L, this is not desirable or a good architecture mainly due to: communications failure could result in data loss, compromising the system's integrity; the remote client and the local system become tightly coupled, meaning the remote client must be aware of all the available local systems; if the data storage in the local system fails, the remote client would have to provide the backup information.

Thus, a remote server component is included, providing the access and management of the system databases, pertaining to the Brand, Company, and MDO Local system. The first two provide the historical information of the **Brand** and **Administrator** entities, and the last one the information related to all of the **MDO-L** systems in operation.

The main functions of the **MDO-RS** are:

- UI requests responses: when a UI user requests/modifies some information from the database, the server must provide/update it.
- MDO-L monitoring and control: provide command dispatch and feedback to the **Administrator** staff for remote monitoring and control of the device.
- MDO-L update: periodically check for start times of each MDO-L device and transfer the relevant data to it.

The server interface is the responsible for managing the requests and respective responses from the remote client and for periodically send the update data to all MDO-L devices.

### 2.2.3. MDO Local system

The MDO local system (MDO-L) is the marketing device, interacting with the user to display multi-sensory advertisements. As aforementioned in Section 1.2, it is comprised of four modes:

- normal mode: the MDO provides sound, video and fragrance outputs. It is the default mode.
- interaction mode: When a user approaches the device, the MDO will go into interaction mode, turning on and displaying the camera feed and waiting for recognizable gestures to provide additional functionalities, such as brand-specific image filters. This is the **User UI**.
- multimedia mode: in this mode the facial recognition is applied, enabling the user to select and apply different brand-specific image filters and take pictures or create a GIF.
- sharing mode: after a user take a picture or create a GIF, it can share it across social media.

The user interaction is considered to be a higher priority activity than the advertisements, so when a **User** interacts with the system, the **normal mode** is overridden by the **Interaction mode**, thus, halting the advertisements.



The MDO-L application communicates with the remote server (MDO-RS) through the Supervisor via TCP/IP to handle requests from Administrator members to monitor and control the device through the Supervisor or to update the advertisements. Additionally, the Supervisor oversees the application mode and the communication (Comm Manager) and database (Database manager) managers to handle system events.

## 2.3. System architecture

In this section, the system architecture is devised in the HW and SW components, using the system overview as a starting point.

### 2.3.1. Hardware architecture

Fig. 2.2 illustrates an initial hardware big picture that fulfils the system's goals, meeting its requirements and constraints. As it can be seen, the diagram is divided in four distinct parts: External Environment, Local System, Remote Server and Remote Client.

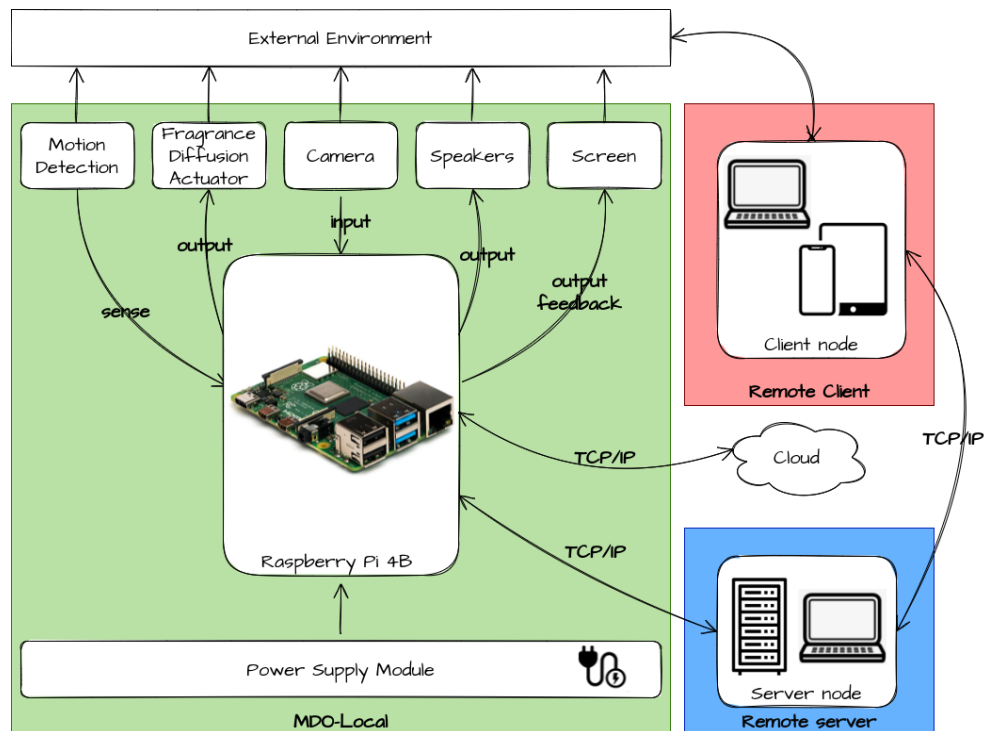


Figure 2.2.: HW architecture diagram

Firstly, the **External Environment** represents all the environment that interacts with the system. In this case, these are all its users — normal users, brands and company staff (Administrator role).

Secondly, the **Local System** is composed of the main controller, which is the Raspberry Pi 4B. This System-on-a-Chip (SoC) is responsible to control all the **Local System** and to establish a connection with the **Remote Server** through its included WiFi module. Additionally, the **Local system** also communicates with the Cloud to share contents on social media, and, potentially, to access image filtering APIs. The **Local System** is powered through a Alternating Current (AC)-Direct Current (DC) power converter, and, potentially, a step-down converter — **Power Supply Module**. The main board has several blocks connected to it:

- Motion Detection: used to detect the users and switch from normal mode to interaction mode;
- Fragrance Diffusion Actuator: used to diffuse the fragrance into the air;
- Camera: used to capture image that is then processed;
- Speakers: used to reproduce advertisements sounds;
- Screen: used to display video clips of advertisements.

In third place, the **Remote Server** has a server node running in another machine that can be one computer or a main frame. The remote server stores all databases which the **Remote Client** and **Local System** may need to access and serves as a proxy server to enable the **Admin** users to control and monitor the **Local System**.

Lastly, the **Remote Client** runs the MDO management application, which can be deploy to a computer (like the Raspberry Pi), a tablet or a smartphone.

### 2.3.2. Software architecture

In this section the SW architecture for MDO-RC, MDO-RS, and MDO-L subsystems is presented, defining its SW stack.

#### MDO remote client

Fig. 2.3 illustrates the SW architecture for the remote client, representing its SW stack. It is comprised of the following layers:

- Application: contains the remote client application. The **Brand** and **Admin** members interact with the UI, which is the visual part of the interface. The **UI engine** is notified and handles all UI events — internal or external — providing the **UI** with feedback for its users. The relevant commands are then parsed — **Parser** component — and responded. The commands are then translated to the appropriate DB queries and responded through the **DB Manager**. The **Comm Manager** is responsible

### 2.3. System architecture

for encapsulating the DB queries into the respective TCP/IP frames to be sent to the **Remote Server** as well as unwrap the incoming server responses.

- **Middleware**: contains the TCP/IP framework supporting these communication protocols as part of Open Systems Interconnection (OSI) model for internet applications. It manages the incoming/outgoing TCP/IP frames by providing the adequate protocol handshaking and queueing and timing aspects of the bytes to send/receive.
- **OS & BSP** – Operating System (OS) & Board Support Package (BSP): it contains the low-level and communication drivers required to handle input (keyboard/touch), output (screen) and communication to the **Remote Server**.

It should be noted that for desktop and mobile applications, the **Middleware** and **OS & BSP** layers are usually abstracted by the OS, thus, the relevant APIs should be used.

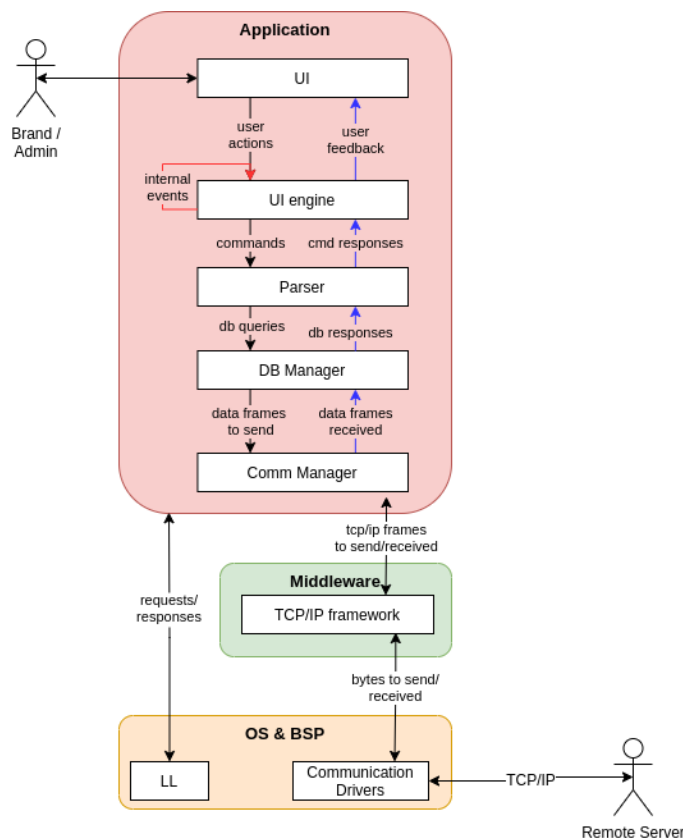


Figure 2.3.: SW architecture diagram: remote client

### MDO remote server

Fig. 2.4 illustrates the SW stack for architecture for the remote server. It is comprised of the following layers:

### 2.3. System architecture

- Application: contains the remote server application. It provides a Command Line Interface (CLI) to handle **Remote client** requests. The CLI engine is notified and handles all UI events – internal or external – providing the appropriate feedback. The relevant commands are then parsed – **Parser** component – and responded: DB queries are handled by the **Relational Database Management System (RDBMS)** issuing DB transactions; other commands received from the **Remote Client** are handled internally and translated, being dispatched to the **Local System** by the **Comm Manager** (via **Communication drivers**). Internal events can also trigger the **RDBMS** to issue database transactions for the **Remote Client** or **Local System**. The **Comm Manager** is responsible for wrapping/unwrapping the data frames received by or sent to the **Remote Client** or **Local System**.
- Middleware: contains the RDBMS framework supporting the management of the relational databases using database transactions.
- OS & BSP – OS & BSP: it contains the **Communication drivers** to handle requests from the **Remote Client**, and the **File I/O drivers** to manipulate DB transactions from/to storage.



Figure 2.4.: SW architecture diagram: remote server

It should be noted that the **Remote Server** main functions are:

- provide relational databases for easier management of all entities and respective data in the system;
- decompose the relationship many-to-many, between the remote clients and local systems — many remote clients may want to connect to different local systems;
- decouple the architecture as the **Remote Client** should not know the Internet Protocol (IP) address of every local system it may potentially try to access, acting as a proxy server.

### MDO local system

Fig. 2.5 illustrates the SW stack for architecture for the **Local System**. It is comprised of the following layers:

- Application: contains the local system application. It provides a UI to handle **User** interaction. The **Interface** engine is notified and handles all UI events — internal or external — through gesture recognition, providing the appropriate feedback. The relevant commands are then parsed — **Supervisor** component — and responded: DB queries are handled by the **Database manager** issuing DB transactions for internal databases; commands received from the **Remote Server** to monitor or control the system are handled internally and responded back by the **Comm Manager** (via **Communication drivers**); mode management is performed. Internal events can also trigger the **Database manager** to issue database transactions to update the **Local System**. The **Comm Manager** is responsible for wrapping/unwrapping the data frames received by or sent to the **Remote Server**.
- Middleware: contains: the DB framework supporting the management of the internal databases using database transactions; the Computer Vision (CV) framework that handles gesture and facial recognition; image filtering and GIF frameworks for multimedia; social media framework.
- OS & BSP — OS & BSP: contains: the **Communication** drivers to handle requests from the **Remote Server** and for social media sharing, and, potentially the API calls to cloud-based image filtering frameworks, depending on the application profiling; the **File I/O** drivers to manipulate internal DB transactions from/to storage; audio, video and fragrance diffuser actuator drivers for normal mode; the camera driver for camera feed; the detection sensor driver to signal a **User** is in range, triggering the switch from normal mode to interaction mode.

The **Local system** is a **soft real-time** system, as no mandatory deadlines must be met.

## 2.4. Subsystem decomposition

For each subsystem, do:

1. User mockups
2. Events

## 2.4. Subsystem decomposition

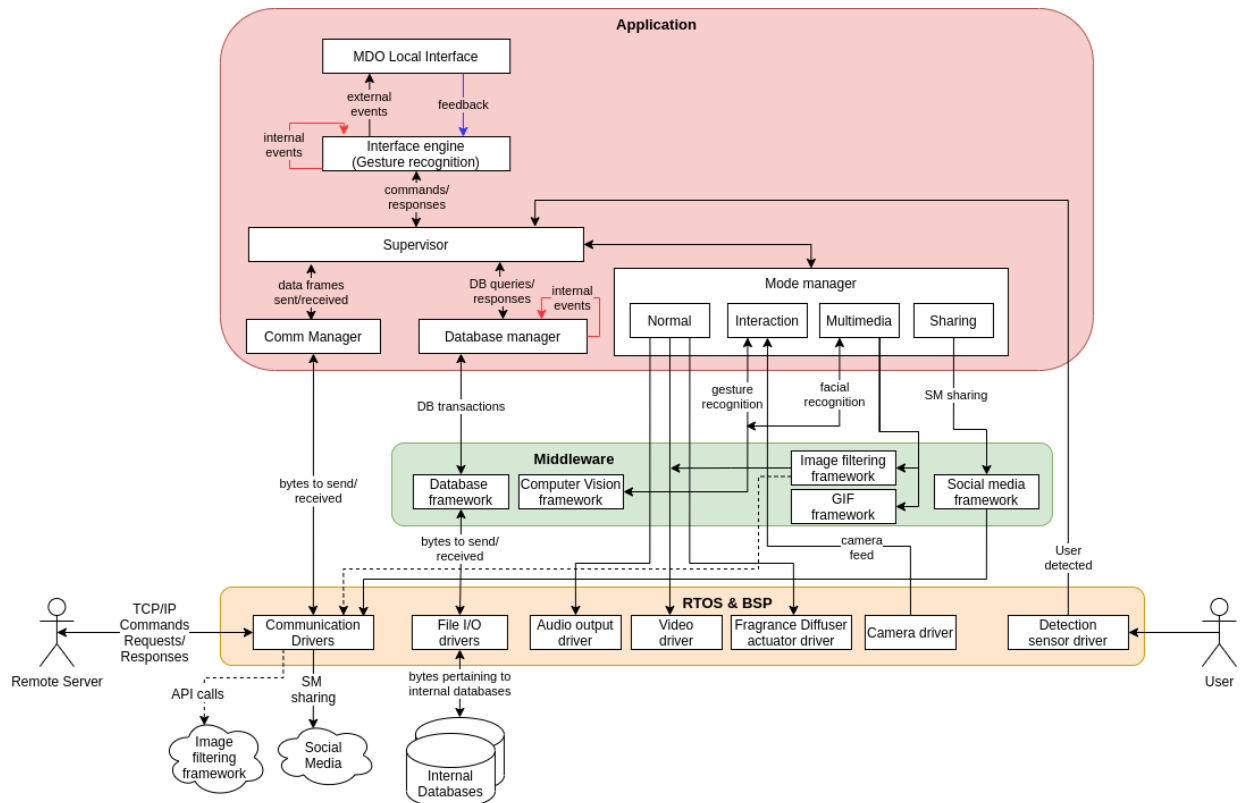


Figure 2.5.: SW architecture diagram: local system

3. Use cases
4. State machine diagram
5. Sequence diagram

### 2.4.1. Remote Client

In this section the remote client is analyzed, considering its events, use cases, dynamic operation and the flow of events.

#### User mockups

In Fig. 2.6 is illustrated the user mockups for the remote client. It intends to clarify how does the UI works for the two different sides: Brands and Company (staff).

The initial state of the MDO-RC's UI is depicted in thick border outline: the 'Sign In' window. If the User makes a mistake in its username and/or password, it will be shown an error message. Also, the 'Sign In' window has an option to recover the password, which sends an e-mail to switch password. If the User still

## 2.4. Subsystem decomposition

---

remembers its credentials, the app flows through one out of two possibilities: if the user is an admin, goes to the admin main menu, or else if the user is a brand, it will appear the brand main menu.

Firstly, the **Admin** workflow:

- The **Admin** main menu contains a drop down button with all the stations available. Choosing one of them, the **Admin** can turn it On/Off, see it's current mode and the current brand ad being displayed. Also, the **Admin** can log out and choose between two different paths:
  - Statistics: It is possible to see various statistics of all different brands that are currently playing on the station: the number of times that the ad was shown, the number of pictures/GIFs and shared posts, the fragrance slot and quantity (percentage) and the days remaining for the rent to end. It is also possible to deactivate the add if something wrong occurs and go back to the previous menu.
  - Users: In this window, the admin can manage all users and see their information. It is possible to the admin to change the type of user to brand or to admin, and it can also remove its type. Also, the admin can delete users from the database.
  - Ads to Activate: In this window, the **Admin** can handle all the ads that the brands are intending to rent. For that, the **Admin** needs to see if everything is in order, such as if all the videos that the brand wants to display are in order (in case there are some or decontextualized videos), if it has a filter, a fragrance and a slot. After that, the **Admin** can either accept or deny the ad. If it accepts the ad, it is shown a success message and the ad is added to the station with its preferences. If the ad is denied, the **Admin** needs to send a reason why it denied the ad, that is consequently send to the brand's email.

Secondly, the **Brand** workflow:

- The **Brand** main menu contains a welcome message, a notification bell to see if another ad was accepted or denied and three buttons - Rented, To Rent and Log Out. The 'Log Out' button logs the **Brand** out of its account, the other two buttons switch to different widgets:
  - Rented: The **Brand** can see all statistics of all its rented ads on different stations that it rented. That statistics are: status, number of times the ad was shown, the fragrance slot and quantity (percentage), the number of pictures/GIFs taken, the number of shared posts and the number of days remaining to end its rent. The 'Go Back' button goes back to the previous menu.
  - To Rent: The **Brand** can rent ads in the same station or in other stations. To that happens, it is only needed to choose the target hours and then a calendar will show what days are available to that hours, then after choosing the days, the **Brand** need to upload a filter and a .zip file

## 2.4. Subsystem decomposition

Table 2.1.: Events: remote client

| Event                      | System response   | Source        | Type         |
|----------------------------|---|---------------|--------------|
| Login                      | The system verifies if the user credentials are correct and what type of user is and asks for data from databases | User          | Asynchronous |
| Verify internet connection | Periodically verify internet connection   | Remote Client | Synchronous  |
| Statistics                 | Request to the Remote Server all the information to show statistics from all stations and brands                  | User (Admin)  | Asynchronous |
| Accept/Deny ad             | Send information to the Remote Server if the ad is either accepted or denied and if so, why                       | User (Admin)  | Asynchronous |
| Power On/Off Station       | Send command to Remote Server to Power On/Off a certain station   | User (Admin)  | Asynchronous |
| Rented                     | Request to the Remote Server all the information to show statistics from all stations the brand rented            | User (Brand)  | Asynchronous |
| Rent                       | Send to the Remote Server all the information of rent from the brand, all the videos and the filter               | User (Brand)  | Asynchronous |
| Forgot Password            | Send e-mail to the user that has forgotten his password   | User          | Asynchronous |

with a maximum of ten videos. Finally, the **Brand** needs to select the fragrance that wants to spill to the air and select 'Rent'. After that, a success message will be shown and the ad will enter in wait list for an **Admin** check if everything is in order.

It is also possible to register a new user through the 'Register' button. This opens a window to type a username, a password, confirm the password and the e-mail. If everything is in order, the user is created with the default user type of Brand.

Finally, at any time, it can occur the loss of internet connection, which toggles an error message informing the automatic log out of the account.

## Events

Table 2.1 presents the most relevant events for the Local system, categorizing them by their source and synchronism and linking it to the system's intended response.

## Use cases

Fig. 2.7 depicts the use cases diagram for the **Remote Client**, describing how the system should respond under various conditions to a request from one of the stakeholders to deliver a specific goal.



## 2.4. Subsystem decomposition

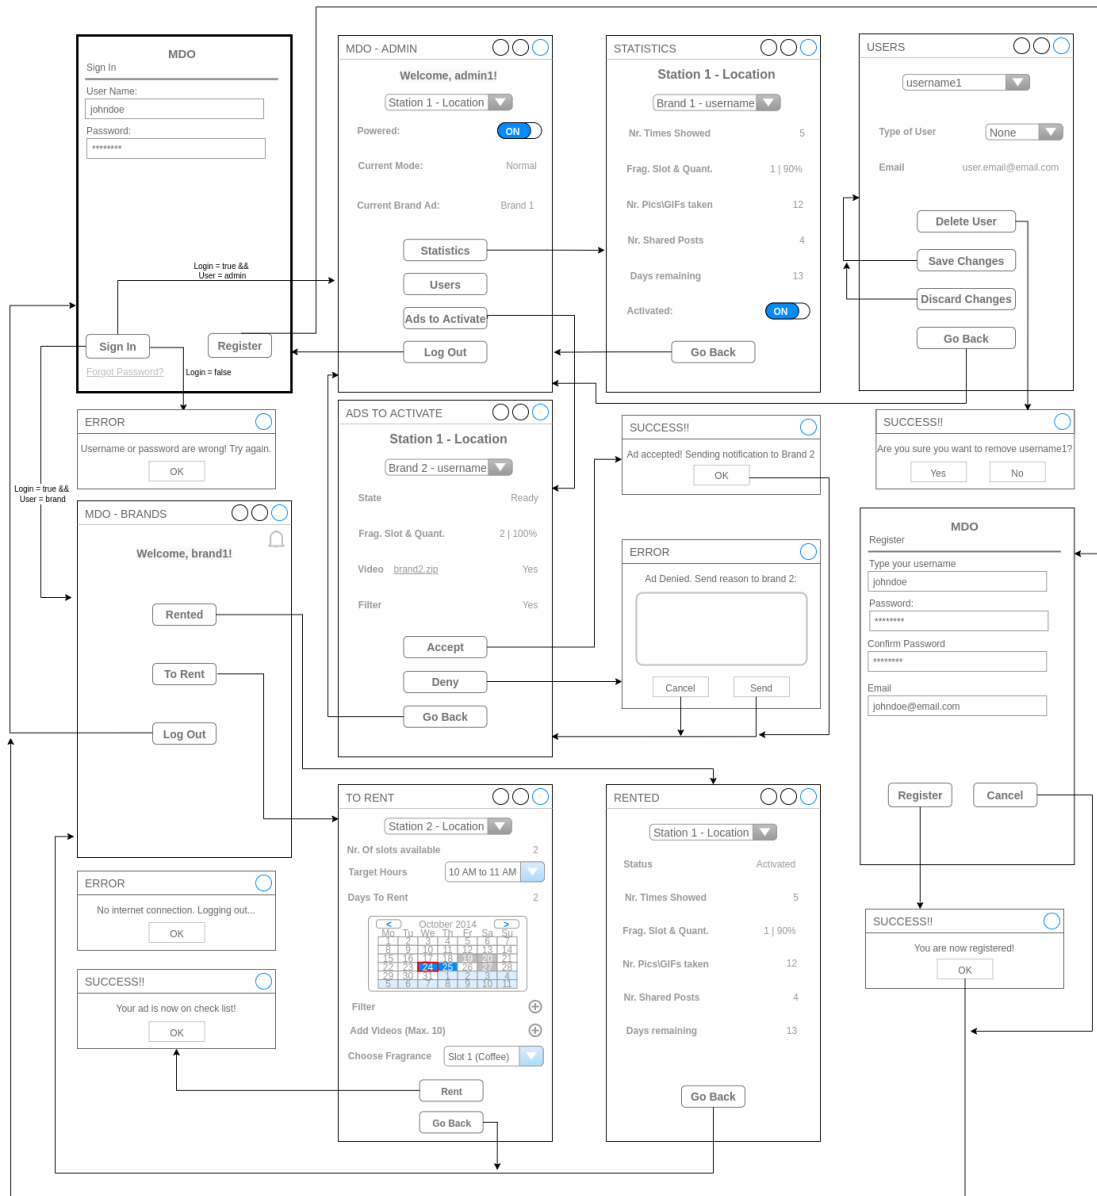


Figure 2.6.: User mockups: remote client

The Admin and the Brand interact with the Remote Client and this last interacts with the Remote Server to process commands, such as query databases or power on/off machines.

The Admin can Manage the Station, which includes Power On/Off Station, Manage Ads to Activate and Enable/Disable an Ad. It can also manage users, removing or modifying them. All these use cases are processed from the Remote Client and are requested to the Remote Server.

The Brand can see Rented Ads, Rent Ads, See notifications and register. All these cases are also processed from the Remote Client and are requested to the Remote Server.

## 2.4. Subsystem decomposition

There are some use cases that are common to the Admin and to the Brand: Login and Logout.

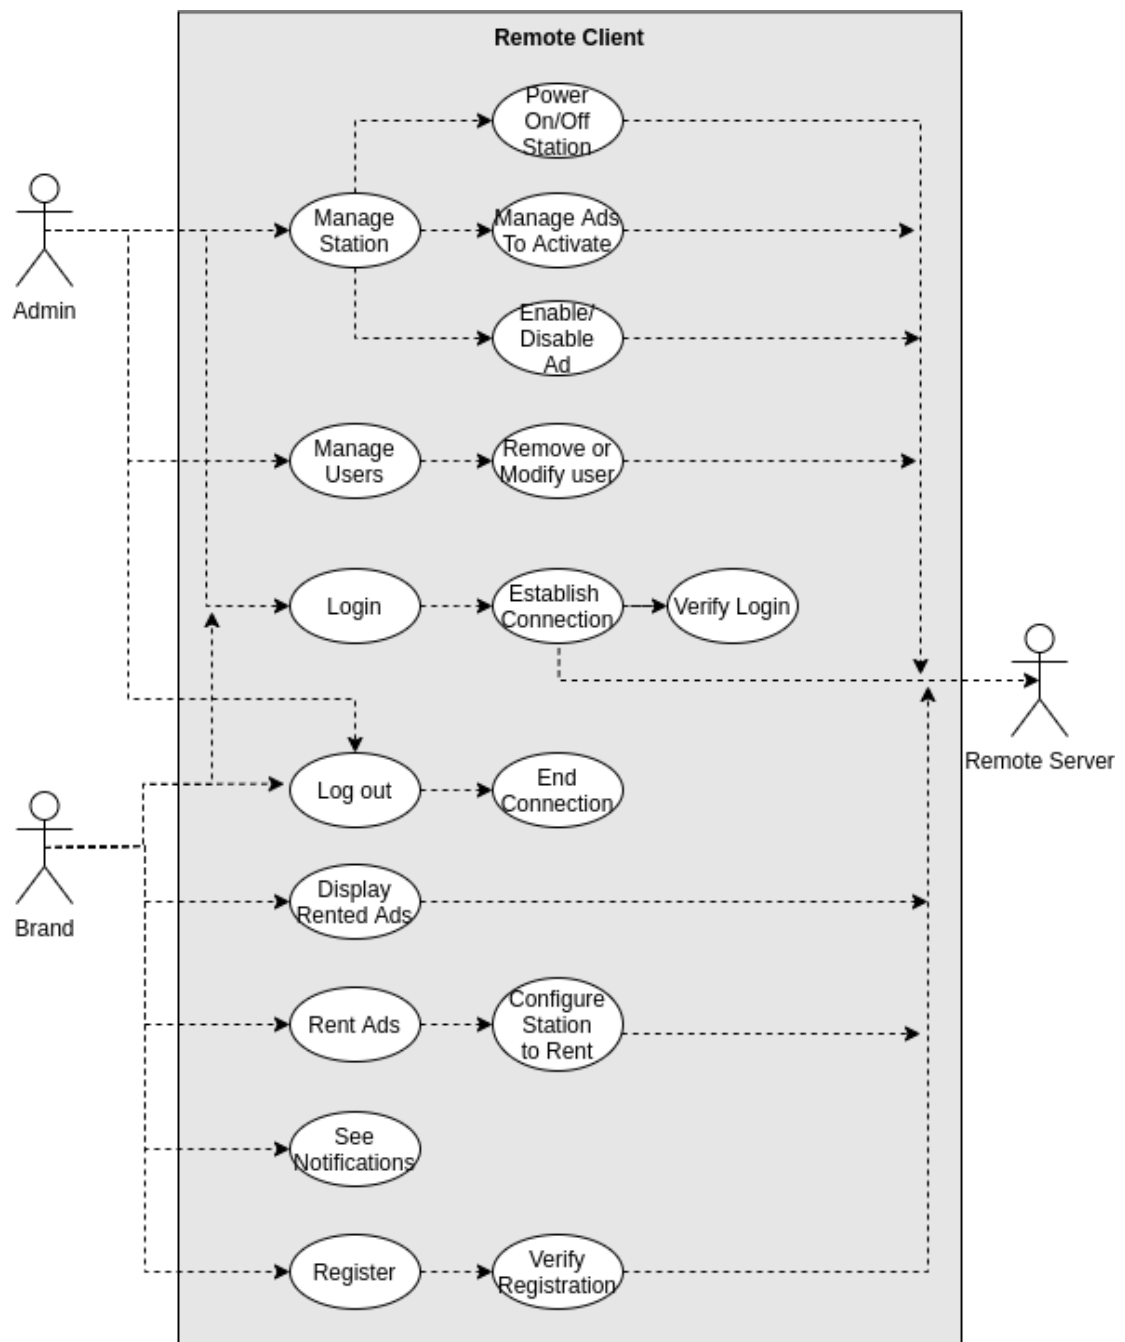


Figure 2.7.: Use cases: remote client

### **Dynamic operation**

#### **Flow of events**

Sequence diagram

### **2.4.2. Remote server**

#### **User mockups**

#### **Events**

#### **Use cases**

#### **Dynamic operation**

State machine diagram

#### **Flow of events**

Sequence diagram

### **2.4.3. Local system**

In this section the local system is analyzed, considering its events, use cases, dynamic operation and the flow of events.

#### **User mockups**

Fig. 2.12 illustrates the user mockups for the local system. It intends to mimic the user interaction with the local system, clarifying the user actions (gestures) and the respective responses, as well as the workflow, comprising its four modes.

The initial state of the MDO-L's UI is depicted in thick border outline, after a **User** has been detected — **Interaction mode**. On the left it is the camera feed and on the right the commands ribbon, containing the hints to use the system and the available options. As it can be, the **User** can choose an option by hovering with pointing finger over the desired option for a designated amount of time (e.g., 3 seconds).

The workflow can be as follows:

- If the **User** selects the **Image filter** option, the **Image filtering** view is shown, presenting the options to select filters (which can be scrolled through palm raising/lowering), to cancel or accept the image filter. If a filter is selected **filter1\_pressed**, it is applied, and if accepted it will return to **Interaction mode**, keeping the filter on.
- If the **User** selects the **Take Pic** option, **Picture mode** is started with a timer to allow the **User** to get ready before actually taking the picture. The **User** can **Cancel** — returning to main menu — or **Share** — starting **Sharing mode**.
- If the **User** selects the **Create GIF** option, **GIF mode (setup)** is started with a timer to allow the **User** to get ready before actually creating the GIF. After the **setup\_timer** is elapsed, the **GIF mode (operation)** starts, displaying a dial with the GIF duration until being complete. When the **gif\_timer** elapses, the GIF is created, enabling the **User** to **Cancel** — returning to main menu — or to **Share** — starting **Sharing mode**.
- Lastly, in the **Sharing mode**, the **User** can **Cancel** — returning to main menu — or select the social media network. After selecting the social media, the **User** can edit the post by entering its customized message and, if **Share** is pressed, a message box will appear displaying the status of the post sharing — **Success** or **Error**.

### Events

Table 2.2 presents the most relevant events for the **Local system**, categorizing them by their source and synchronism and linking it to the system's intended response. A further division is done separating UI events from the remaining ones.

### Use cases

Fig. 2.13 depicts the use cases diagram for the **Local System**, describing how the system should respond under various conditions to a request from one of the stakeholders to deliver a specific goal.

The **Admin** interacts with the **Remote Client** (through its UI) requesting the **Remote Server** to process commands, getting the state of the device, adding a video or selecting the fragrance. Additionally, the **Admin** may test the operation of the device: play video, test audio, nebulize fragrance or test the camera. This last one tests the main functionalities the **User** also utilizes, namely: select image filter, apply/reject image filter, take picture, create GIF or share multimedia on the social media.

A precondition for the interaction of the **Admin** with the **Local System** is the establishment of a remote connection between the **Remote Server** and the **Local system**, verifying its credentials. However, there is another important use case for this remote connection: the update of the **Local System's** internal databases

## 2.4. Subsystem decomposition

Table 2.2.: Events: local system

| Event                     | System response  | Source            | Type         |
|---------------------------|--|-------------------|--------------|
| Power on                  | Initialize sensors and go to Normal mode                   | System maintainer | Asynchronous |
| User detected             | Turn on camera feed and go to Interaction mode             | User              | Asynchronous |
| Command received          | Parse it and respond                                       | Remote Server     | Asynchronous |
| Database update           | Request update of internal databases to Remote Server      | Database manager  | Asynchronous |
| Enable fragrance diffuser | Enable fragrance diffusion for a predefined period of time | Local System      | Synchronous  |
| Video ended               | Playback the next video on the queue                       | Local System      | Synchronous  |
| Check WiFi connection     | Periodically check WiFi connection                         | Local System      | Synchronous  |
| <b>UI events</b>          |  |                   |              |
| Option selected           | Track the option selected and inform the UI engine         | User              | Asynchronous |
| Image filter pressed      | Go to Image filter view                                    | User              | Asynchronous |
| Filter selected           | Detect User's face and apply filter                        | User              | Asynchronous |
| Pic pressed               | Go to Picture mode   | User              | Asynchronous |
| Pic setup elapsed         | Take picture   | Local System      | Synchronous  |
| GIF pressed               | Go to GIF mode   | User              | Asynchronous |
| GIF setup elapsed         | Go to GIF operation  | Local System      | Synchronous  |
| GIF operation elapsed     | Finish GIF   | Local System      | Synchronous  |
| Share mode pressed        | Go to Sharing mode (selection)                             | User              | Asynchronous |
| Keyboard pressed          | Give feedback to user                                      | User              | Asynchronous |
| Share post pressed        | Upload post to designated social media                     | User              | Asynchronous |
| Share post status         | Inform user about shared post status                       | Cloud             | Asynchronous |

from the Remote server which will sent appropriate commands for this purpose.

### Dynamic operation

Fig. 2.14 depicts the state machine diagram for the Local System, illustrating its dynamic behavior. There are two main states:

- **Initialization**: the device is initialized. The settings are and DBs are loaded and if invalid they are restored. The WiFi communication is setup, signaling the communication status and if valid, an IP address is returned. Lastly, the HW is initialized, checking its presence, configuring it and testing the

configuration: if any error occurs the device goes into the **Critical Error** state, dumping the error to a log file and waiting for reset; otherwise, the initialization is complete.

- **Execution:** after the initialization is successful, the system goes into the **Execution** macro composite state with several concurrent activities, modeled as composite states too. However, it should be noted that there is only one actual state for the device, although at the perceivable time scale they appear to happen simultaneously. These activities are communication management (**Comm Manager**), DB management (**DB manager**), and application supervision (**Supervisor**), and are executed forever until system's power off. They are detailed next.

### Communication Manager

Fig. 2.15 depicts the state machine diagram for the **Comm Manager** component. Upon successful initialization the **Comm Manager** goes to **Idle**, listening for incoming connections. When a remote node tries to connect, it makes a connection request which can be accepted or denied. If the connection is accepted and the node authenticates successfully the **Comm Manager** is ready for bidirectional communication. When a message is received from the remote node, it is written to **TX msg queue** and the **Supervisor** is notified. When a message must be sent to the remote, it is read from the **TX msg queue** and sent to the recipient. If the connection goes down, it is restarted, going into **Idle** state again.

### Database Manager

Fig. 2.16 depicts the state machine diagram for the **DB Manager** component. Upon successful initialization the **DB Manager** goes to **Idle**, waiting for incoming DB requests. When a request arrives, it is parsed, checking its validity. If the request is a DB query, a transaction is read from the respective DB to the **RX transaction queue** and the **Supervisor** is notified that there is a transaction to read. Otherwise, if the request is a DB update the transaction is written from the **TX transaction queue** to the DB and the **Supervisor** is notified that the DB was updated.

### Supervisor

Fig. 2.17 depicts the state machine diagram for the **Supervisor** component, comprising two tasks running in 'parallel':

- **Request Handler:** handles incoming requests from the **Remote server**. When a request arrives, it is parsed, and, if valid, the appropriate callback is triggered, processing the request and returning its output.
- **Mode manager:** Upon successful initialization the **Mode Manager** goes to **Idle**, and it is 'awake' if it is time to play the advertisements or if a user is detected. If the former is verified— **Normal mode** —

the device retrieves video and fragrance data from the DB and plays video and nebulizes fragrance. If the latter is verified — **Interaction mode** the device turns on the camera and mirrors the feed on the display, waiting for a recognizable gesture. If the **User** choose to select an image filter, take a picture or create a GIF, the device goes into **Multimedia mode**, returning back to **Interaction mode** after its exit condition or after a timeout. Lastly, if the **User** chooses to share the image or GIF created, it must select the social media network, edit the post to enter some message and confirm the sharing, returning to **Interaction mode**. If no user interaction happens for a while, the device returns back to **Idle mode**.

### Flow of events

Sequence diagram

## 2.4. Subsystem decomposition

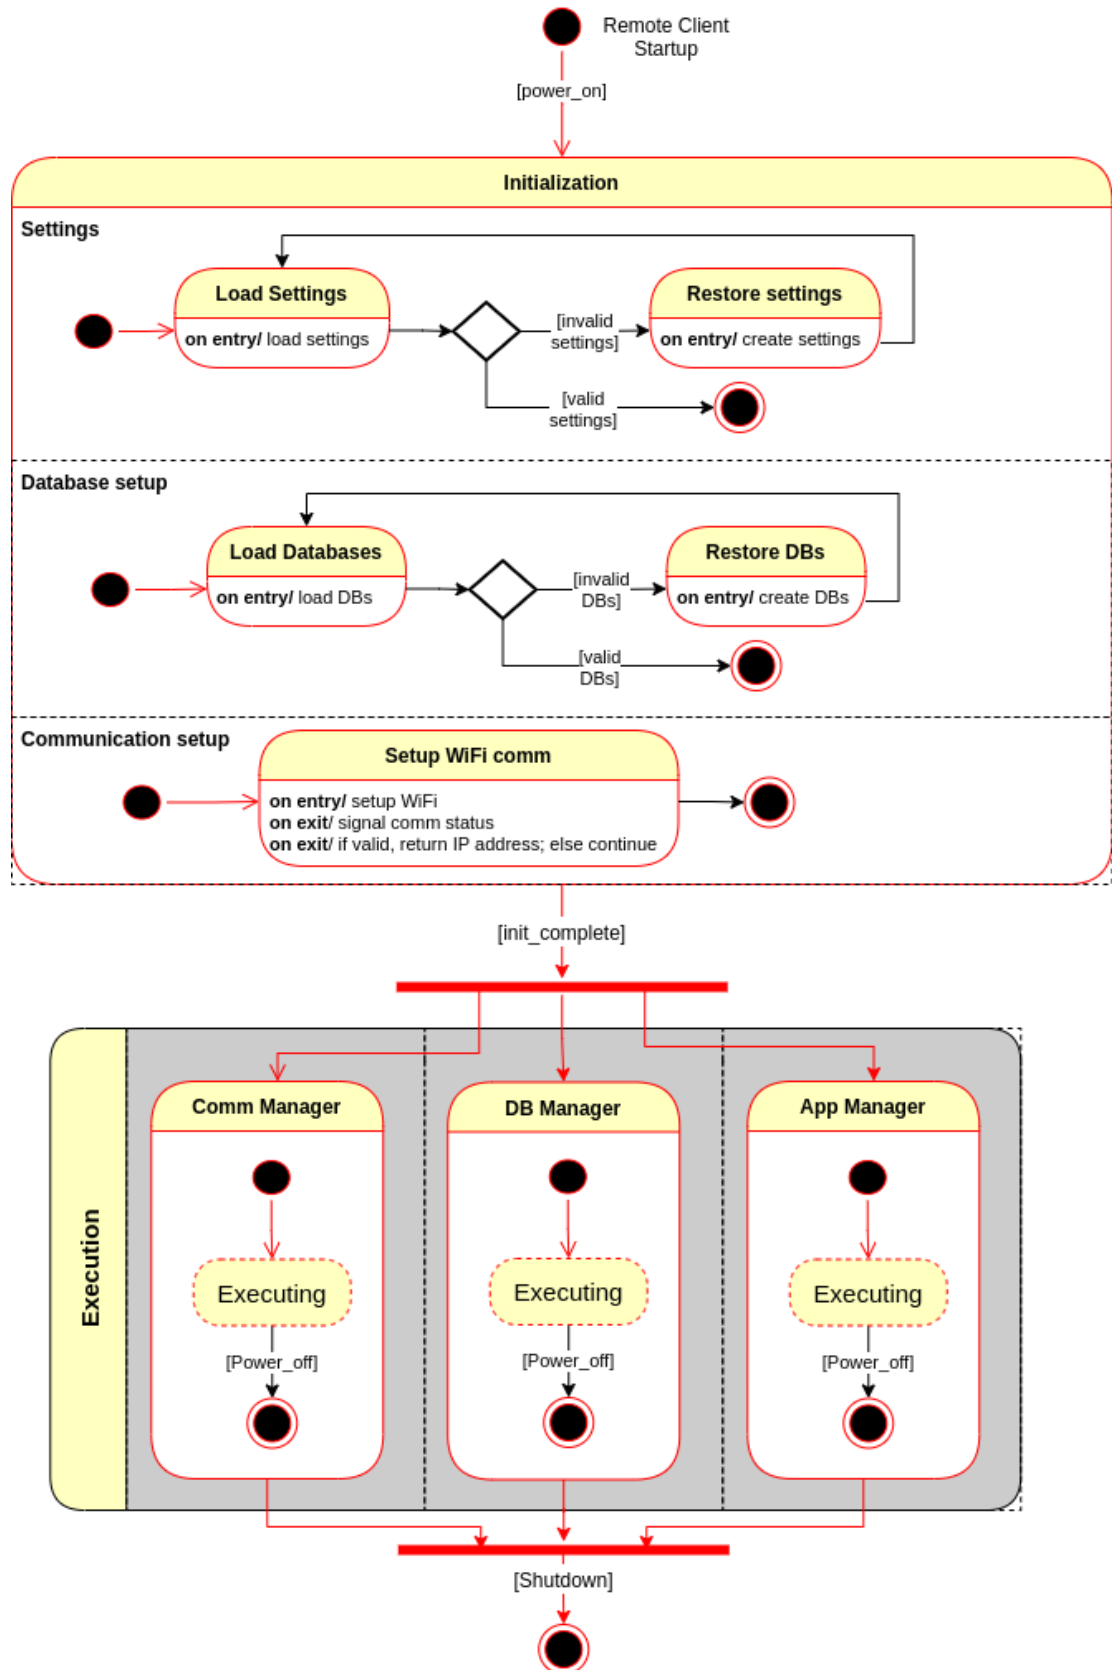


Figure 2.8.: State Machine Diagram: remote client



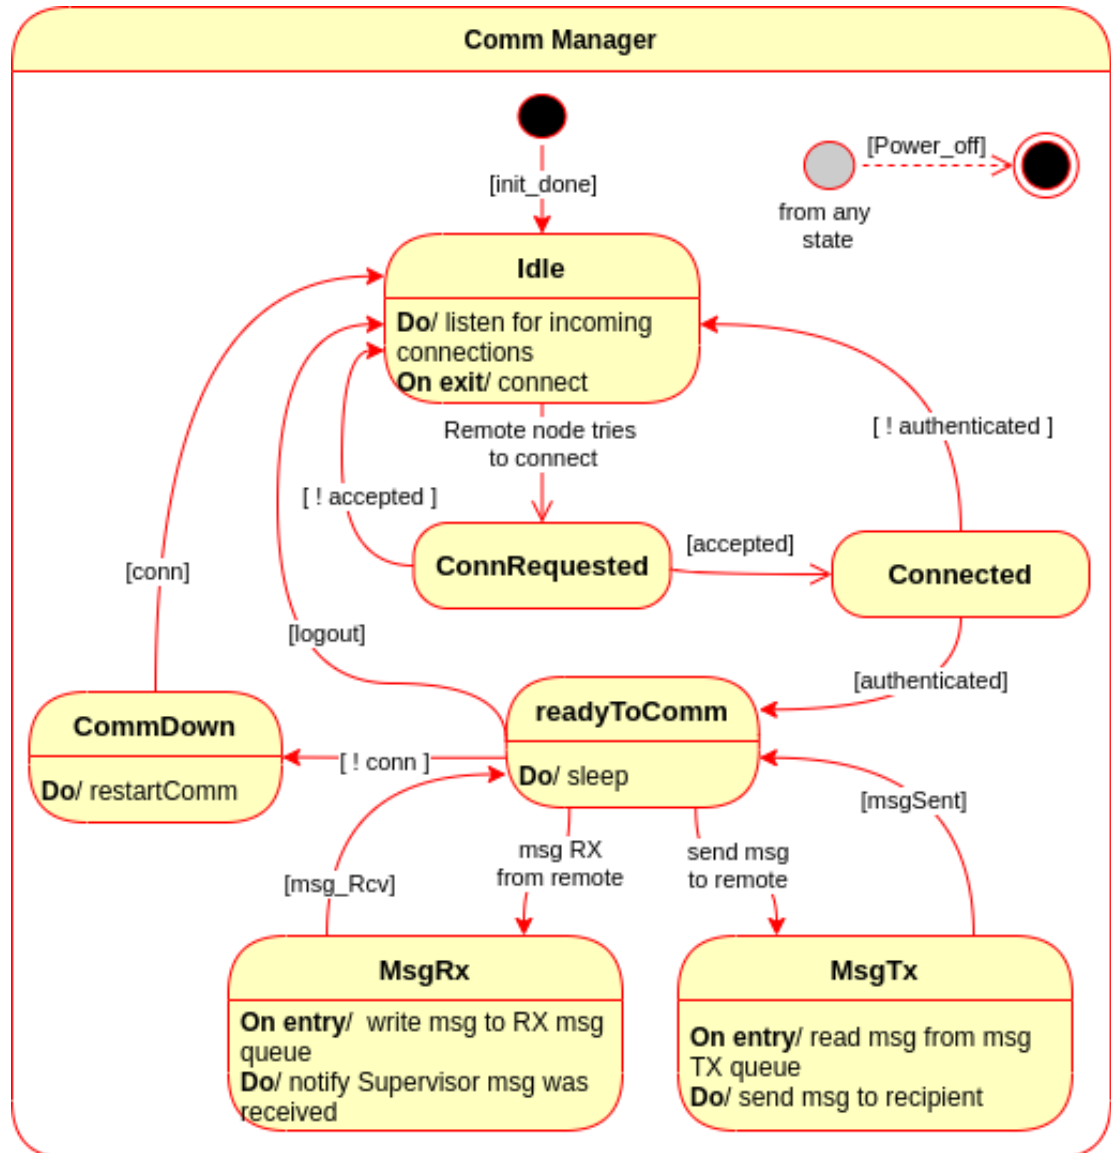


Figure 2.9.: State Machine Diagram: remote client communication manager

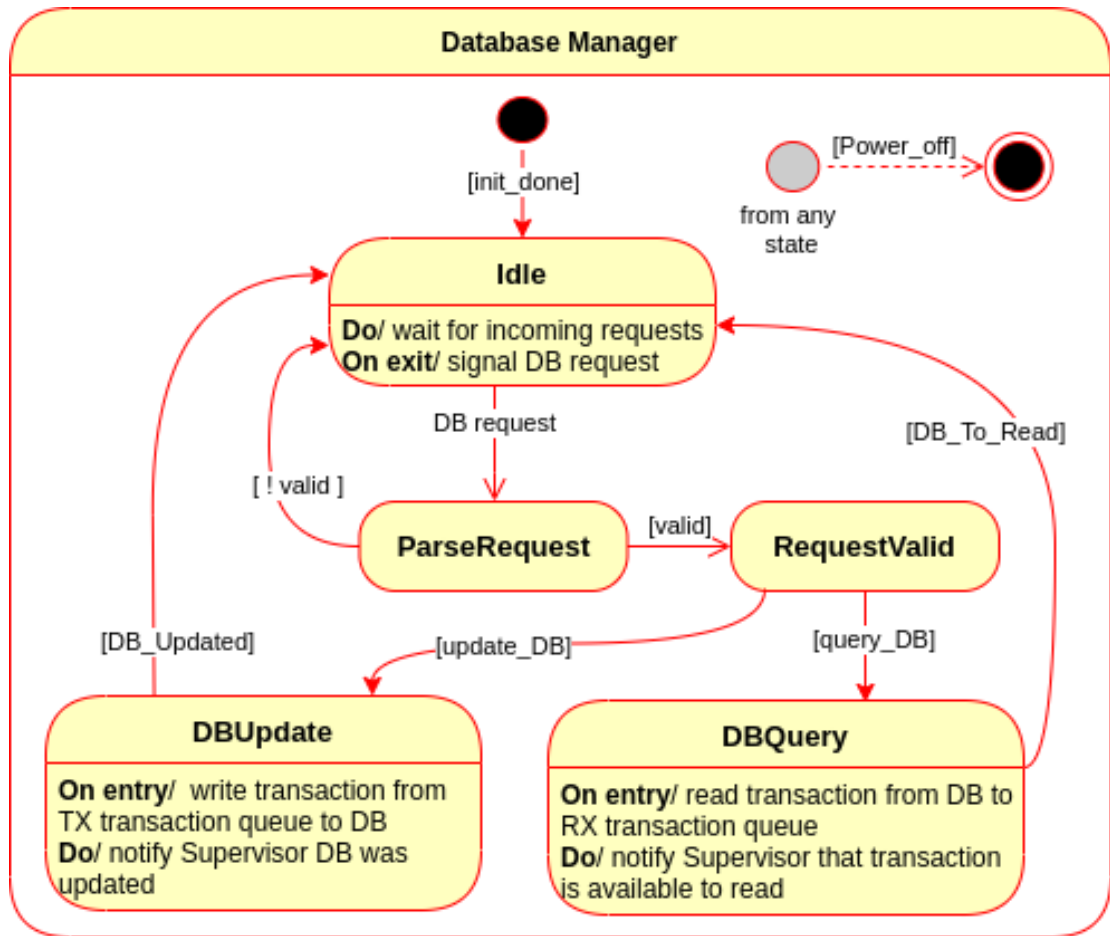


Figure 2.10.: State Machine Diagram: remote client database manager

## 2.4. Subsystem decomposition

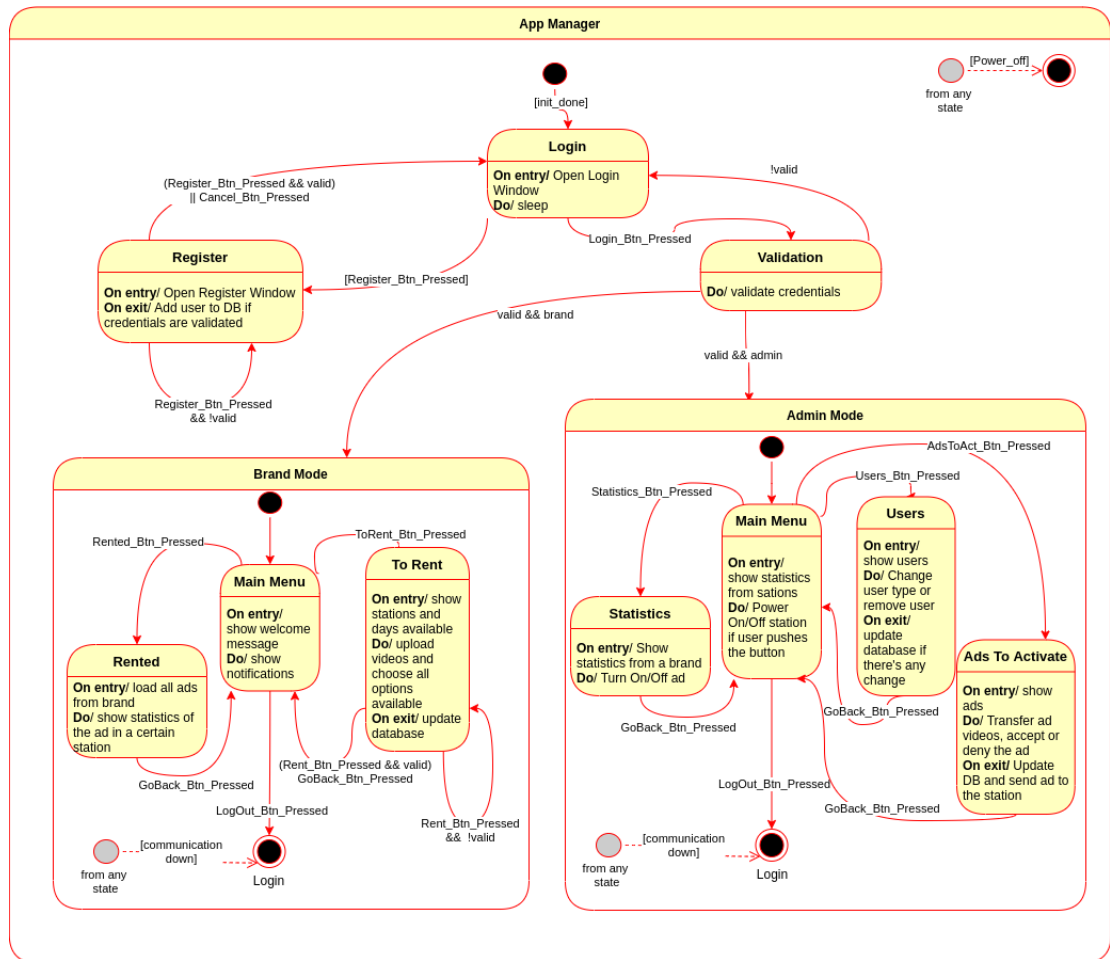


Figure 2.11.: State Machine Diagram: remote client app manager

## 2.4. Subsystem decomposition

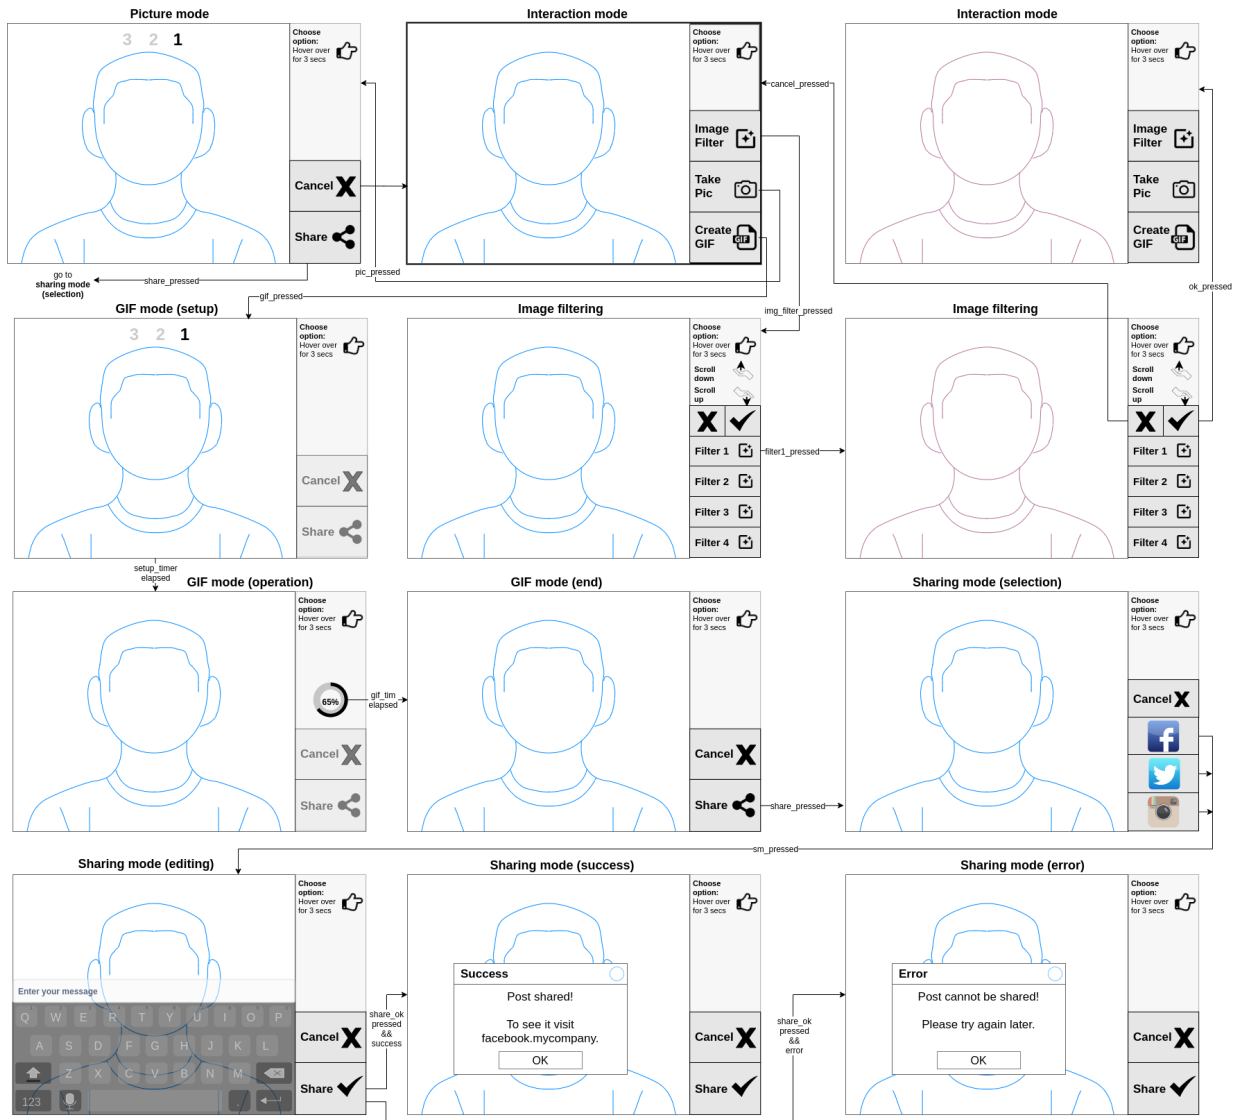


Figure 2.12.: User mockups: local system

## 2.4. Subsystem decomposition

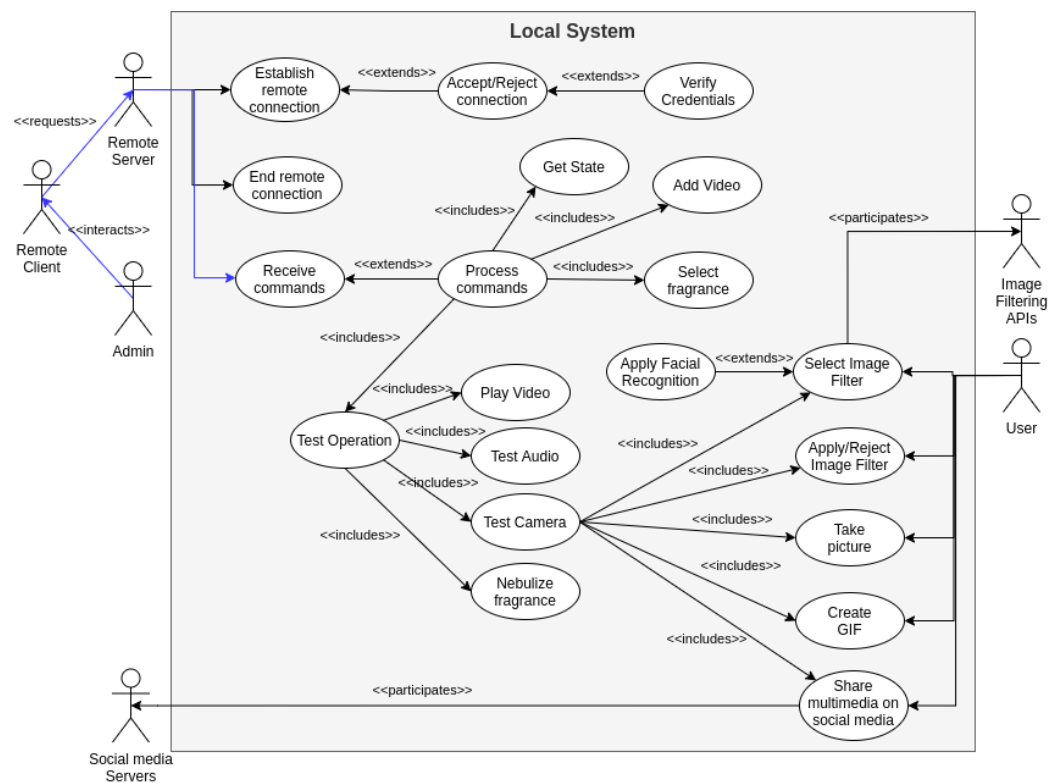


Figure 2.13.: Use cases diagram: local system

## 2.4. Subsystem decomposition

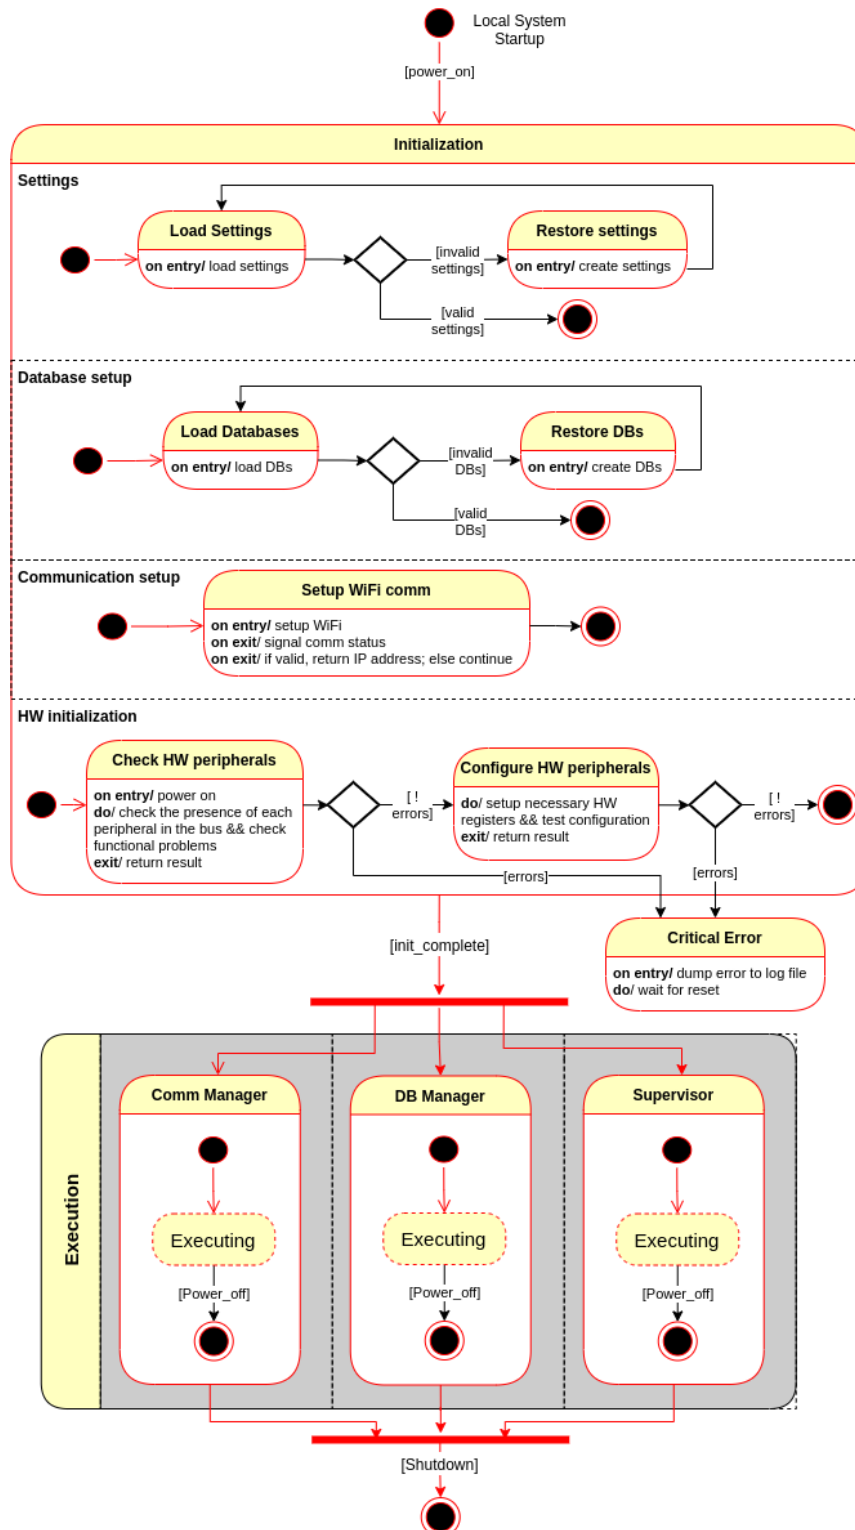


Figure 2.14.: State machine diagram: local system

## 2.4. Subsystem decomposition

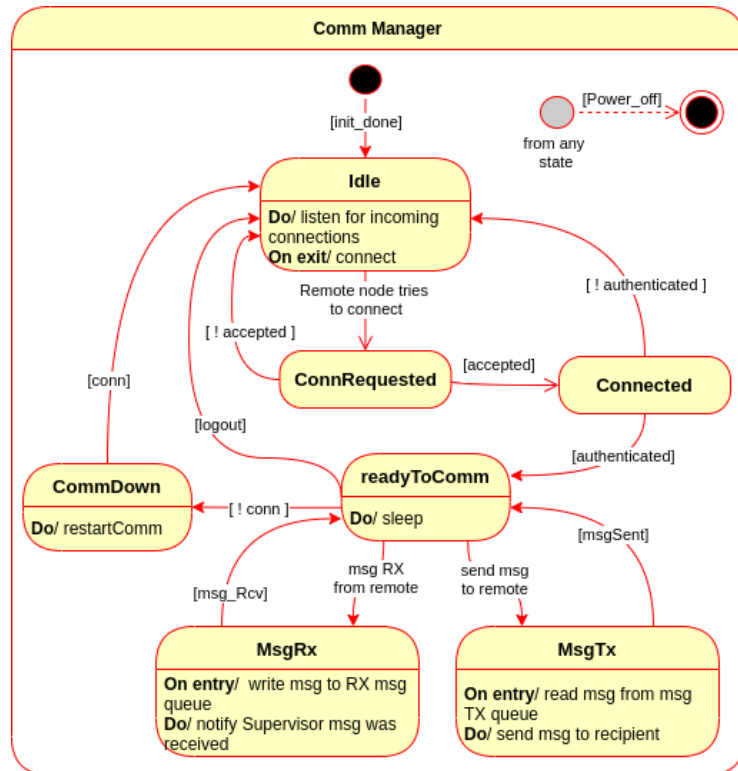


Figure 2.15.: State machine diagram: local system – Comm Manager

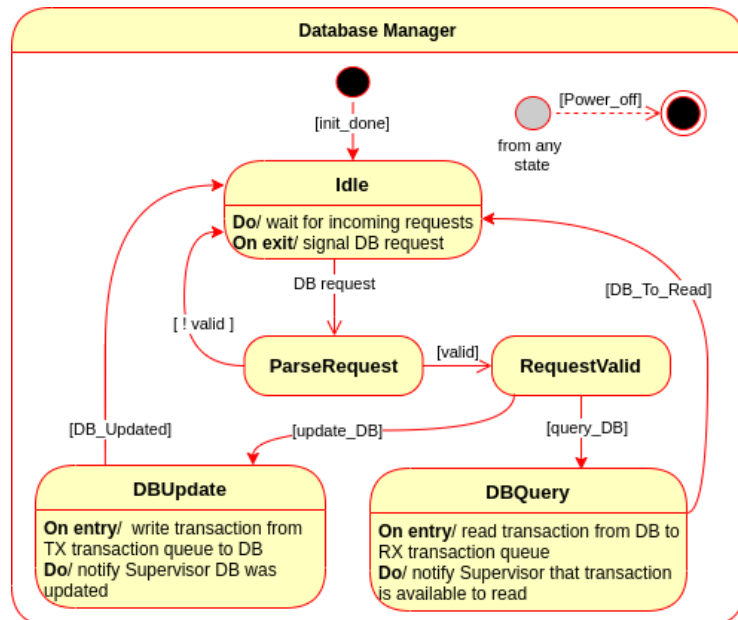


Figure 2.16.: State machine diagram: local system – DB Manager

## 2.4. Subsystem decomposition

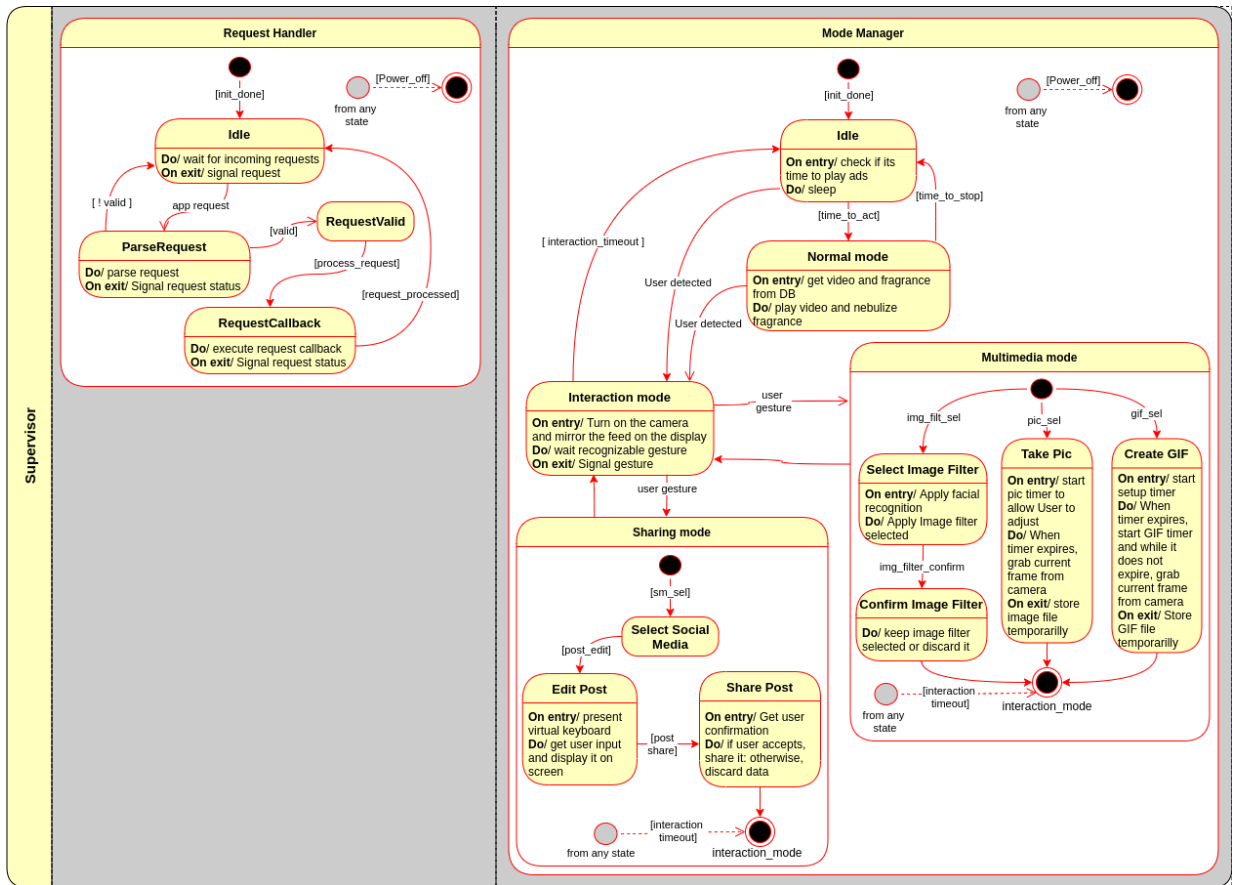


Figure 2.17.: State machine diagram: local system – Supervisor



# Bibliography

- [1] Fei Tao, Meng Zhang, and A.Y.C. Nee. Chapter 12 - digital twin, cyber-physical system, and internet of things. In Fei Tao, Meng Zhang, and A.Y.C. Nee, editors, Digital Twin Driven Smart Manufacturing, pages 243–256. Academic Press, 2019. ISBN 978-0-12-817630-6. doi: <https://doi.org/10.1016/B978-0-12-817630-6.00012-6>. URL <https://www.sciencedirect.com/science/article/pii/B9780128176306000126>.
- [2] What the nose knows. URL <https://news.harvard.edu/gazette/story/2020/02/how-scent-emotion-and-memory-are-intertwined-and-exploited/>. accessed: 2021-10-23.
- [3] Martin Lindstrom. Brand sense: How to build powerful brands through touch, taste, smell, sight and sound. Strategic Direction, 2006.
- [4] Digital outdoor advertising: The what, the why, the how. URL <https://bubbleoutdoor.com/digital-outdoor-advertising-what-why-how/>. accessed: 2021-10-24.
- [5] Digital outdoor market to be worth \$55 BN in 5 years. URL <https://www.decisionmarketing.co.uk/news/digital-outdoor-market-to-be-worth-55bn-in-5-years>. accessed: 2021-10-24.
- [6] Scent marketing; type of sensory marketing targeted at the olfactory sense, . URL <https://www.air-aroma.com/scent-marketing/>. accessed: 2021-10-24.
- [7] Scent basics: What is scent marketing, scent branding and ambient scent, . URL <https://reedpacificmedia.com/scent-basics-what-is-scent-marketing-scent-branding-and-ambient-scent/>. accessed: 2021-10-24.
- [8] Digital scent technology market with covid-19 impact analysis, . URL <https://www.marketsandmarkets.com/Market-Reports/digital-scent-technology-market-118670062.html>. accessed: 2021-10-24.

# Appendices

## **A. Project Planning – Gantt diagram**

In Fig. [A.1](#) is illustrated the Gantt chart for the project, containing the tasks' descriptions.

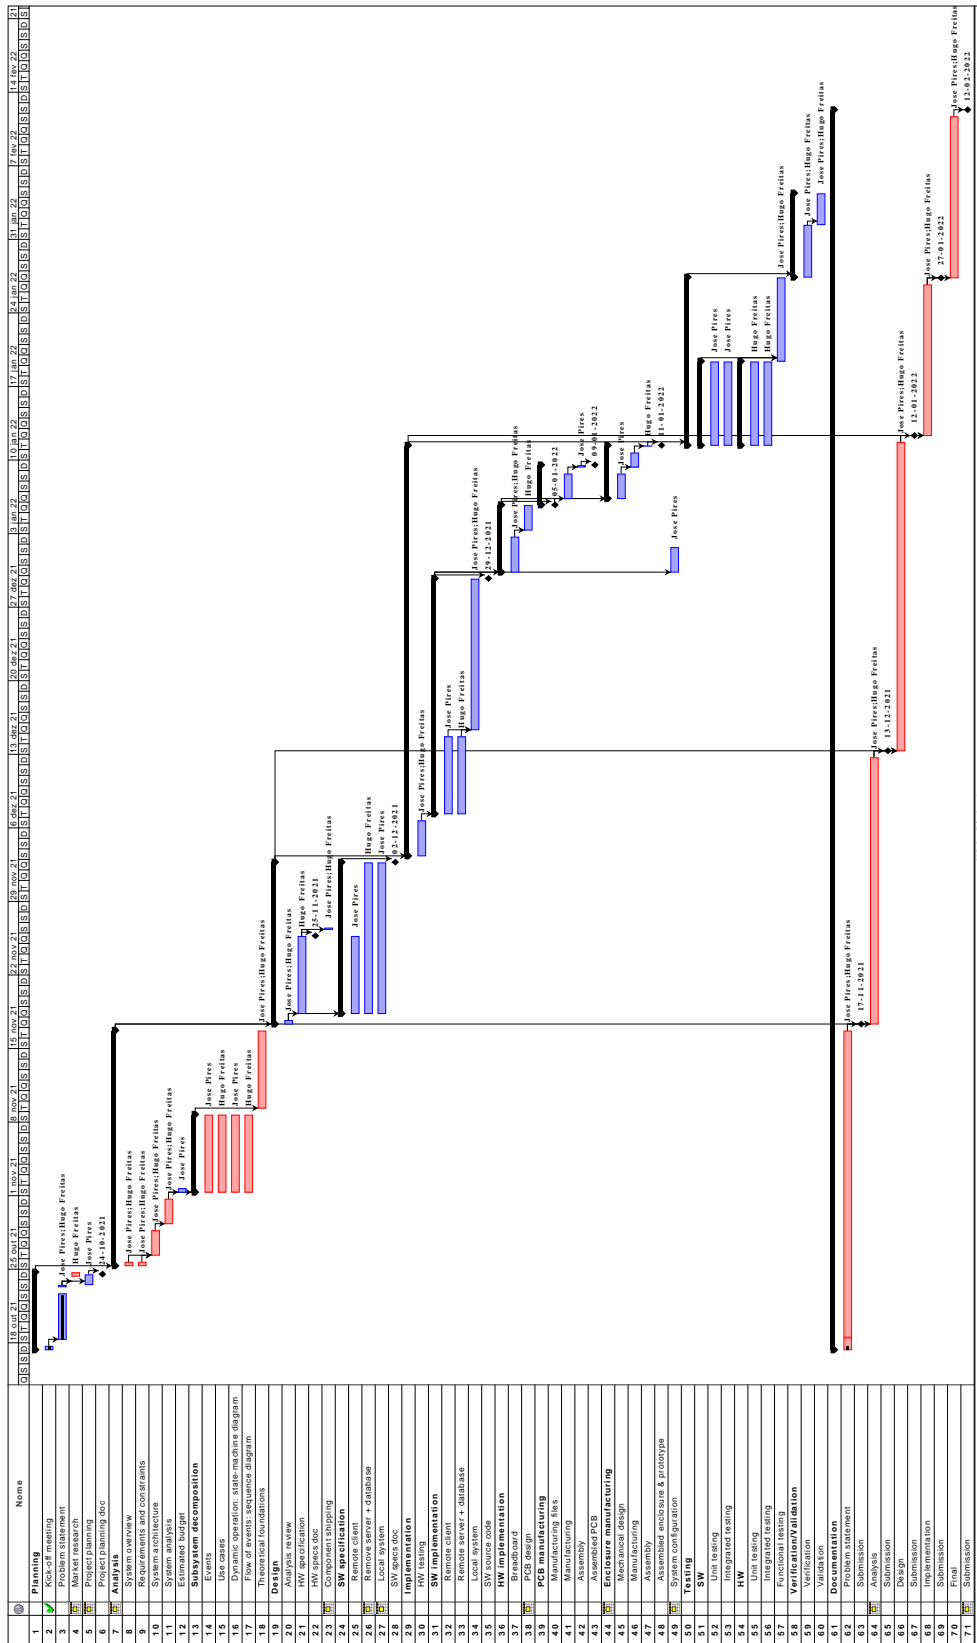


Figure A.1.: Project planning — Gantt diagram