




Data Link Connector (OBD-II, SAE J1962)

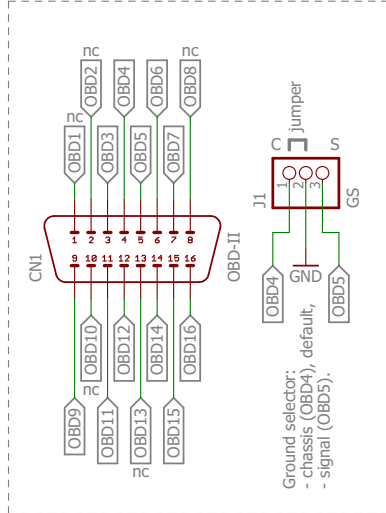


Power switch (ON/OFF)

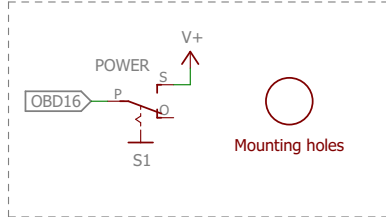


Reset circuit (ATmega2560)

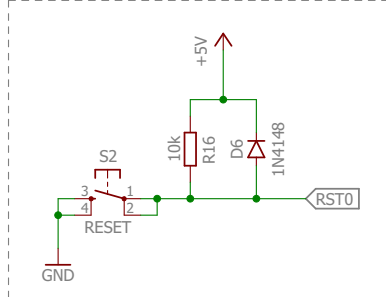


Crystal oscillator circuit (ATmega2560)

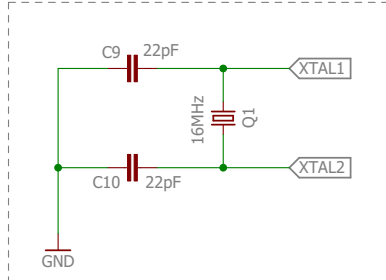


ISP-10 programming port (ATmega2560)

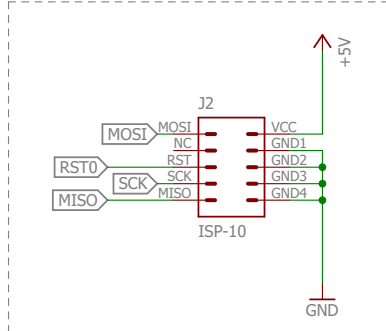


ADC lowpass filter

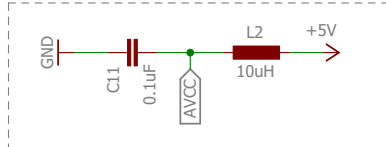


Power supply

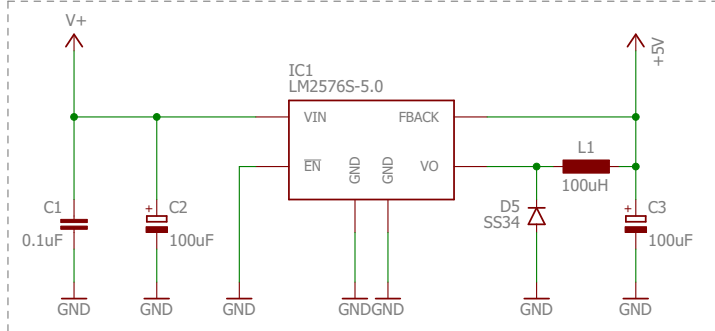


USB / UART Bridge + Micro-B USB connector

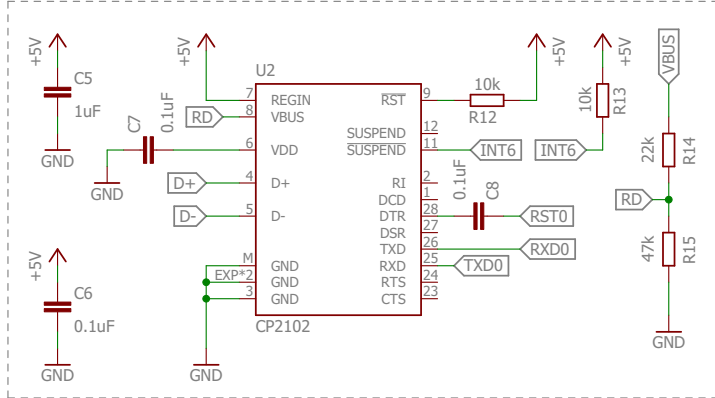


Status LEDs

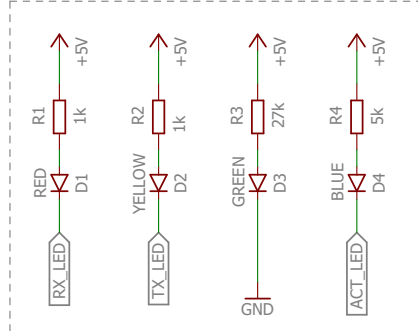


CCD-bus interface (UART mode)

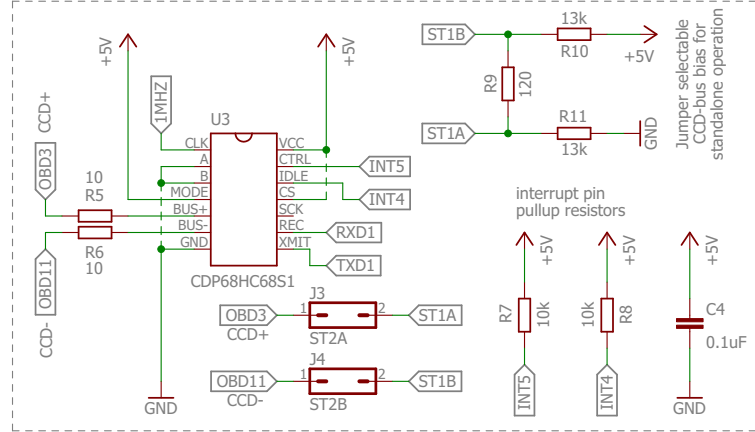


SCI-BUS_A/B_ENGINE interface (UART)

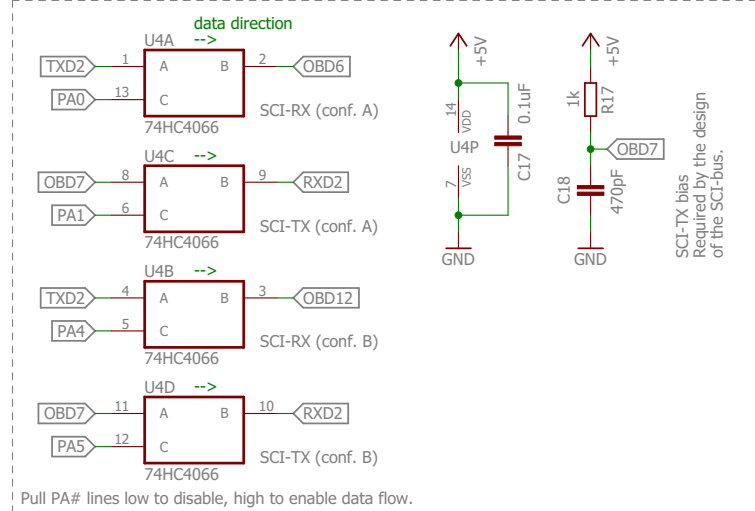


SCI-BUS_A/B_TRANSMISSION interface (UART)

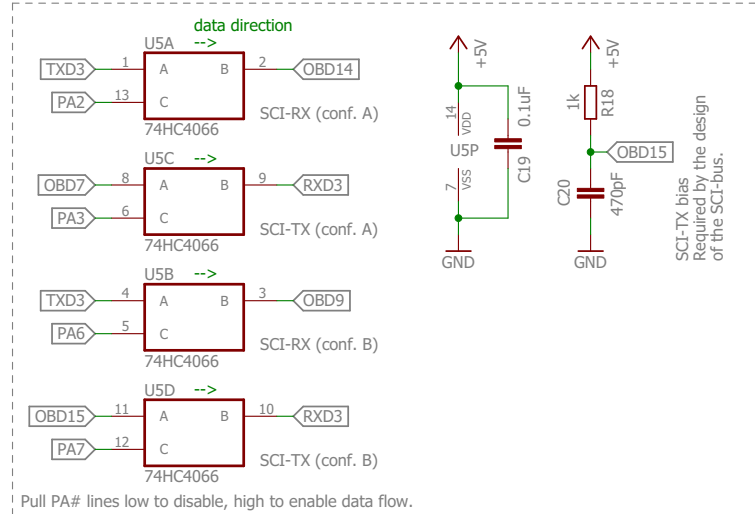


Misc. connectors

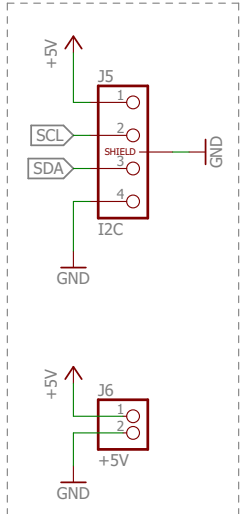


ATmega2560-16AU microcontroller

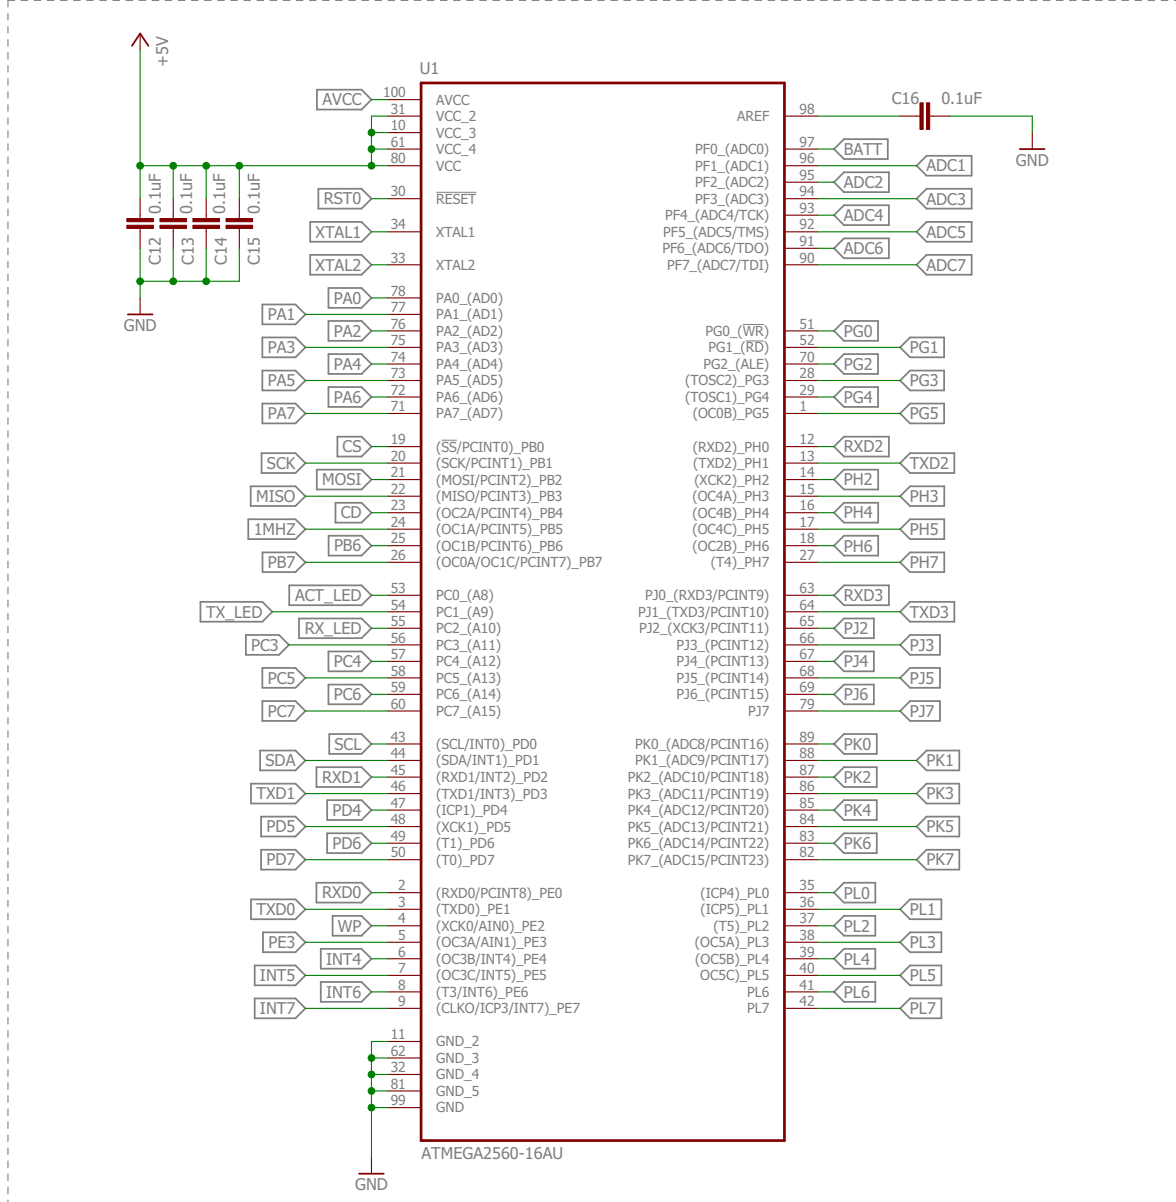

SCI-bus configuration selector

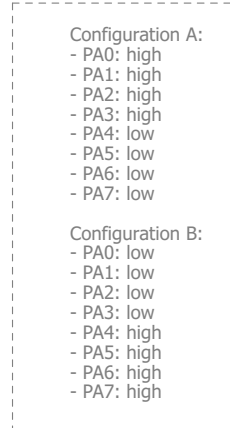

Battery voltage sensor

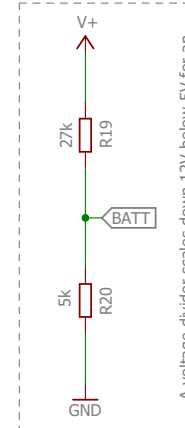

External EEPROM (4kB)

