


Specifications

Rated voltage (Vp-p square wave)	1.5Vp-p
Operating voltage	1~3Vp-p
Rated current at rated voltage	≤15mA
Sound output at 2048Hz at 10cm	≥80dB
Resonant frequency	2048Hz
Coil resistance	42±6Ω
Coil impedance at 2048Hz	120Ω
Operating temperature	-20~+70°C
Storage temperature	-30~+80°C
Weight	2g

Requires additional electronic circuitry to operate as a sounder. Not wave solderable.

ABT-410-RC

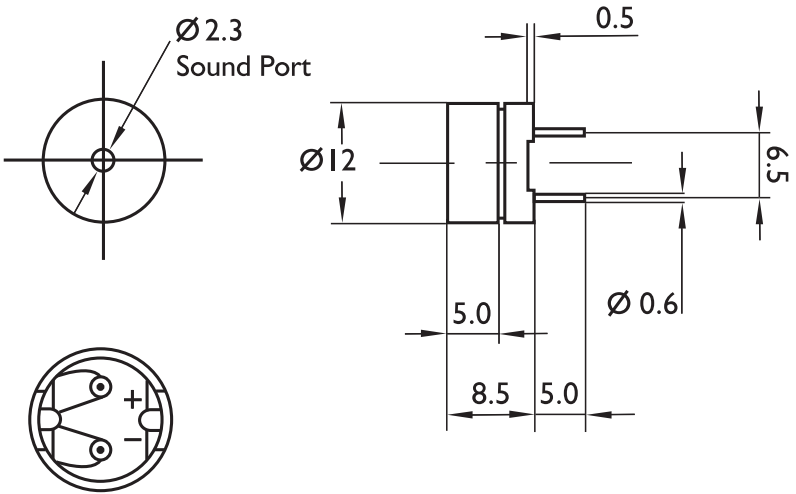

Features

- ROHS compliant
- PCB mountable
- Low current consumption

All data at 25°C unless otherwise specified

Dimensions Unit: mm Tolerance: ±0.5mm