

Generation IV Nuclear Reactors: Safety and Efficiency

Vorwissenschaftliche Arbeit verfasst von

Elias Leitinger

Klasse 8B



Betreuer: Patrick Ritt

BRG Steyr Michaelerplatz
Mühlbergstraße 1
4407 Dietach

Steyr, February 2023

Abstract

This is a placeholder for the abstract. It summarizes the whole thesis to give a very short overview. Usually, this the abstract is written when the whole thesis text is finished.

Contents

Abstract	ii
1 Basic concepts of nuclear power	1
1.1 Fission	1
1.2 Nuclear Cross Section	2
1.3 Criticality	2
1.4 Components of Nuclear Reactors	3
1.4.1 Fuel	3
1.4.2 Moderator	4
1.4.3 Control Rods or Blades	5
1.4.4 Coolant	5
2 Common Nuclear Reactor Types	7
2.0.1 PWR – Pressurized Water Reactor	7
Bibliography	9

1 Basic concepts of nuclear power


Nuclear power reactors harness the heat generated by splitting atoms of certain elements in a controlled and predictable way. This heat is used to create electrical power¹.

1.1 Fission

Nuclear fission is the spontaneous or induced reaction, by which an atom is broken up. In the case of nuclear power reactors these reactions are exothermic. Nuclear radiation such as in equation 1.1 already liberates a large amount of energy.

$${}_{92}^{238}\text{U} \rightarrow {}_{90}^{234}\text{Th}, \quad P = 8 \cdot 10^{-9} \frac{W}{g} \quad (1.1)$$

This power is increased in nuclear reactors by 10 orders of magnitude. Although the effective lifespan is lowered from $4.468 \cdot 10^9$ years to a few months. Therefore fission is the main reaction through which nuclear reactors generate the majority of their power output. An example of such a reaction is given in equation 1.2.²




It is important to note that 1.2 is a simplification of the actual decay series of ${}_{92}^{236}\text{U}$ into stable end products. 1.2 is sufficient to understand the principle

¹World Nuclear Association, 2022.

²Basdevant, Rich, and Spiro, 2005, p. 286.

behind nuclear fission. The decay series of $^{236}_{92}\text{U}$ with no intermediates removed is given in 1.3.³

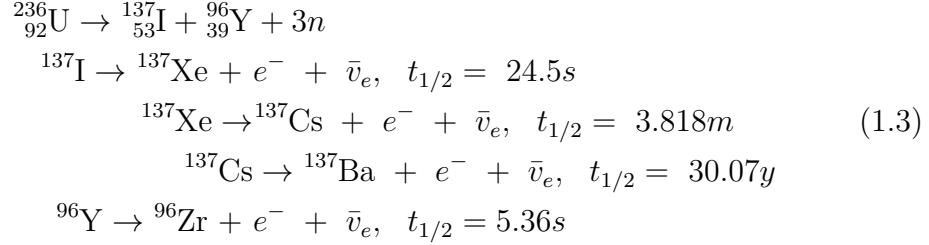

1.2 Nuclear Cross Section

Nuclear cross section describes the probability of a certain nuclear reaction to occur. This aspect needs thorough consideration in the design of nuclear reactors, as the nuclear cross section generally increases with the inverse of the velocities of the reactants⁴.

1.3 Criticality

Criticality is the operating condition of a nuclear reactor, in which the neutrons produced by fission events is sufficient to sustain a chain reaction. It is measured using the multiplication factor k . It is defined as in 1.4. If the factor k equals 1 the reaction is said to be critical as the number of neutrons remains constant. If the factor k is less than 1, therefore the number of neutrons is decreasing and the chain reaction is said to be subcritical. If the factor k is greater than 1 the number of neutrons is increasing exponentially and the reaction is supercritical.^{5,6}

$$k = \frac{\text{number of neutrons in one generation}}{\text{number of neutrons in the previous generation}}\tag{1.4}$$

³Basdevant, Rich, and Spiro, 2005, p. 287.

⁴Basdevant, Rich, and Spiro, 2005, p. 108.

⁵Basdevant, Rich, and Spiro, 2005, p. 308.

⁶Stacey, 2018, p. 39.

1.4 Components of Nuclear Reactors

1.4.1 Fuel

The reactor fuel is the fissile material used in the fission reaction inside of a reactor. In most cases uranium oxide UO_2 pressed into pellets is used for this purpose. These pellets are put into tubular fuel rods. The whole fuel assembly inside the reactor consists of many such rods⁷.

1.4.1.1 Startup Neutron Source

As the fission of uranium produces three neutrons per reaction, there does not need to be a constant external influx of neutrons. However, to start this chain reaction inside a new reactor equipped with newly made fuel rods a neutron source is needed. Usually beryllium combined with an alpha emitter is used for this purpose, as the collision of an α -particle with ${}^9_4\text{Be}$ releases a neutron as part of its reaction, as can be seen in equation 1.5^{8,9}.



⁷World Nuclear Association, 2022.

⁸World Nuclear Association, 2022.

⁹Basdevant, Rich, and Spiro, 2005, p. 100.

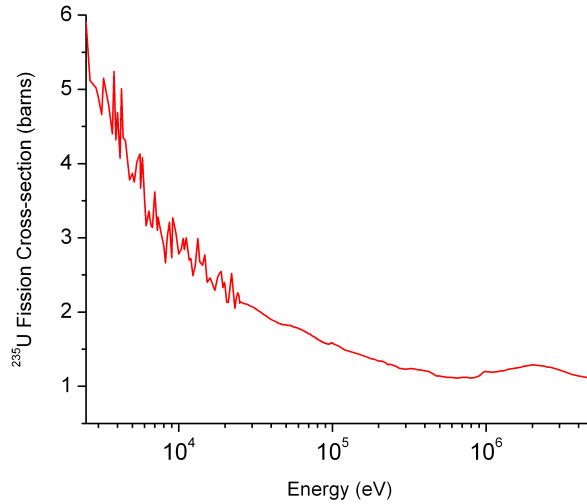


Figure 1.1: Nuclear cross section of ^{235}U in relation to neutron energy

1.4.2 Moderator

Nuclear fission events release neutrons with energies in excess of multiple MeV, or speeds higher than $10^7 \frac{m}{s}$. However at these speeds the nuclear cross section of the fission reaction is quite low as can be seen in figure 1.1.

Therefore the emitted neutrons need to be slowed down in order to be useful. These are called thermal neutrons. This is done using a moderator. When passing through a moderator the neutrons are slowed down through collisions with the aforementioned. Although it is important to note that the moderator should absorb as few neutrons as possible to not hinder the chain reaction. For this reason H_2O and graphite are commonly used.¹⁰

1.4.2.1 Fast Reactors

However, there is a category of reactors which harness fast neutrons in their nuclear reaction. These have no moderator and instead make use of fuel, which

¹⁰Stacey, 2018, p. 28.

requires a higher share of ^{235}U as this reduces the chance of neutron capture by ^{238}U and increases the likelihood of a fission event to occur. As actinides are fissile by fast neutrons, fast reactors may reduce the amount of transuranic nuclear waste generated by nuclear power production. There is still ongoing research regarding fast reactors to make them useful for widespread energy production.¹¹

1.4.3 Control Rods or Blades

In order to regulate the reaction speed inside of a nuclear reactor the number of neutrons inducing nuclear fission needs to be regulated. This is accomplished using control rods. As a single control rod with a circular cross section would lead to very nonuniform fission and temperature dynamics, the control rods are either arranged into cruciform blades or evenly spaced across the reactor in the form of clusters. A typical reactor contains around 50 clusters, each make up of 20 control rods^{12,13}.

These rods or blades contain materials which readily absorb neutrons, such as boron or cadmium. They may either be made of steel enriched with boron or hollow tubes filled with a brittle salt like material such as cadmium isotopes. Because the amount of fuel inside reactor steadily decreases, the amount of neutrons absorbed needs to be regulated in order for the chain reaction to continue. Therefore the control rods or blades are mounted on a movable apparatus, which extends or retracts the control rods into or out of the reactor, thereby regulating the amount of neutrons absorbed¹⁴.

1.4.4 Coolant

The coolant is a liquid which circulates inside the nuclear reactor core to extract the thermal energy generated from the fission reactions. In most cases today this liquid is H_2O . In the case of boiling water reactors the water is boiled

¹¹World Nuclear Association, 2022.

¹²Stacey, 2018, p. 72.

¹³Grayson, 2011.

¹⁴Grayson, 2011.

directly inside the core. In all other reactor types, such as pressurized water reactors at least a secondary, separated, coolant circuit is used, which transports the heat away from the primary circuit. When the water is not boiled inside the reactor core, a separate steam generator is used to create the steam, which drives the turbine. The same water which is used as a coolant may also be used as the reactor moderator¹⁵.

¹⁵World Nuclear Association, 2022.

2 Common Nuclear Reactor Types

2.0.1 PWR – Pressurized Water Reactor

Pressurized water reactors harness H_2O as coolant and moderator. However they have at least two coolant circuits. The water in the primary coolant circuit is under a large pressure in order to still remain liquid even at the high temperatures generated inside the reactor core. Between the primary and secondary coolant circuit lay a steam generator, which turns the cool water supplied in the secondary circuit into steam used to drive turbines. Special attention needs to be drawn to the fact, that primary and secondary circuit are never directly connected and therefore no radioactive material can be passed from inside the reactor core though the steam generator. Therefore only the reactor components which lay before the steam generator need to be under containment. World Nuclear Association, [2022](#)

Appendix

Bibliography

- Basdevant, J.L., J. Rich, and Michael Spiro (2005). *Fundamentals in Nuclear Physics: From Nuclear Structure to Cosmology*. Advanced Texts in Physics S. Springer. ISBN: 9780387016726 (cit. on pp. 1–3).
- Grayson, James (2011). *Control Rods in Nuclear Reactors*. URL: <http://large.stanford.edu/courses/2011/ph241/grayson1/> (visited on 10/11/2022) (cit. on p. 5).
- Stacey, Weston M. (2018). *Nuclear reactor physics*. 3rd, revised edition. Weinheim, Germany: Wiley-VCH (cit. on pp. 2, 4, 5).
- World Nuclear Association (Aug. 2022). *Nuclear Power Reactors*. URL: <https://world-nuclear.org/information-library/nuclear-fuel-cycle/nuclear-power-reactors/nuclear-power-reactors.aspx> (visited on 09/25/2022) (cit. on pp. 1, 3, 5–7).

List of Figures

1.1	4
-----	-------	---

Eidesstattliche Erklärung

Ich, Elias Leitinger, erkläre hiermit eidesstattlich, dass ich diese vorwissenschaftliche Arbeit selbständig und ohne Hilfe Dritter verfasst habe. Insbesondere versichere ich, dass ich alle wörtlichen und sinngemäßen Übernahmen aus anderen Werken als Zitate kenntlich gemacht und alle verwendeten Quellen angegeben habe.

Dietach, am _____
Datum

Unterschrift