



reversible_plastic — load 0.73476 — post


full mesh / selected region $\Delta E_I/V_0=7.18\text{e-}05$ $\Delta E_S/V_0=7.21\text{e-}05$ $\Delta_{rev}u=0.0514$ forward m3 changes=153 arrows $\times 10$

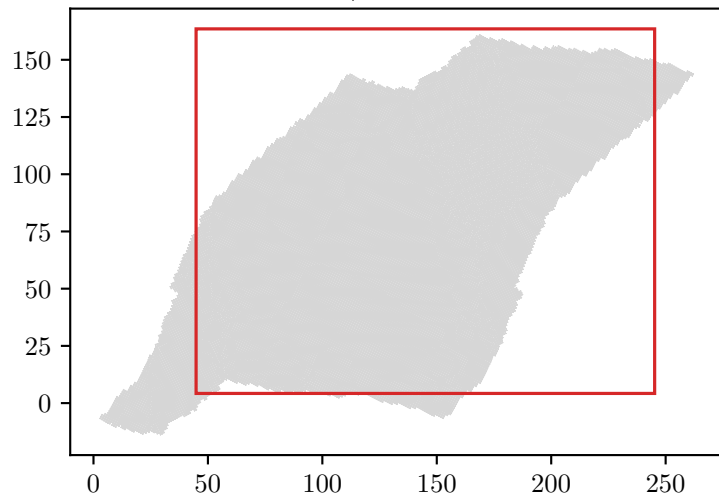

chosen-setting reversible-only scatter

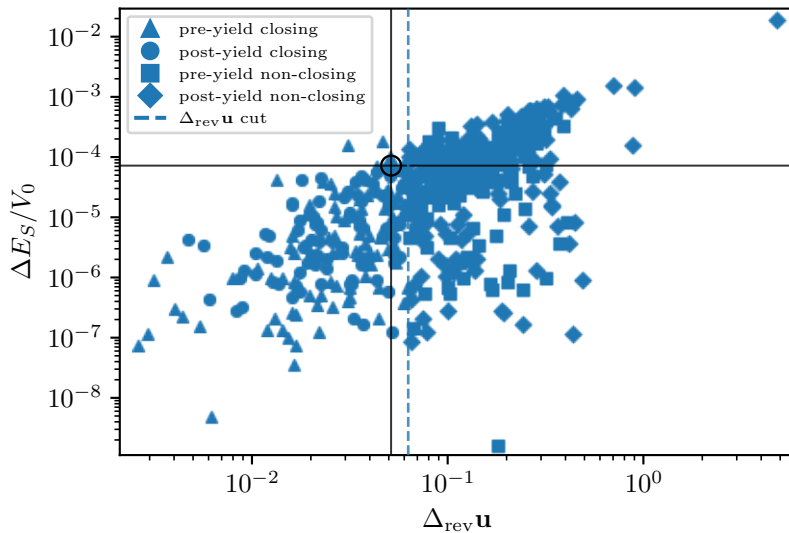

$E_0 - E_2$ with forward relaxation

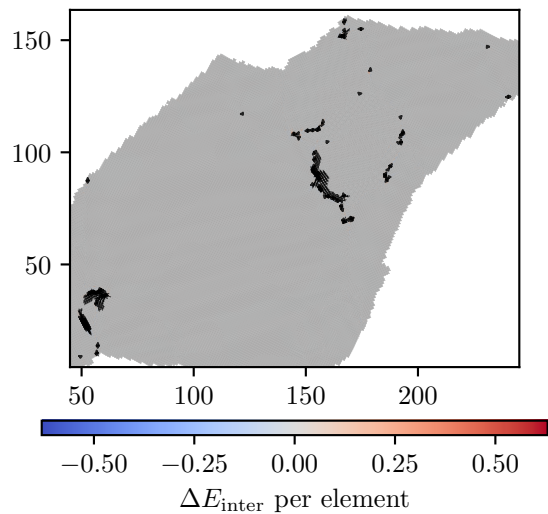

closure residual $x_4 - x_0$

