

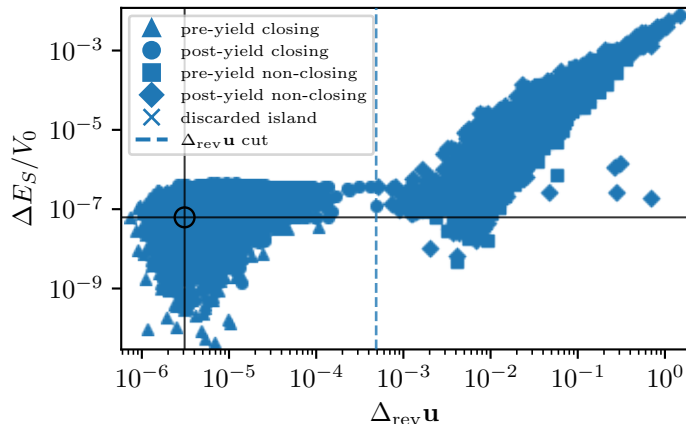


reversible_plastic — load 0.19884 — pre
 $\Delta E_t/V_0 = 2.59\text{e-}07$ $\Delta E_s/V_0 = 6.22\text{e-}08$ $\Delta_{rev}u = 3.09\text{e-}06$ forward m3 changes=1 arrows $\times 10^4$
 full mesh / selected region chosen-setting reversible-only scatter

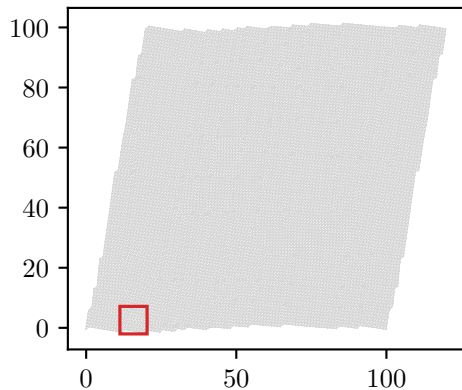

$E_0 - E_2$ with forward relaxation

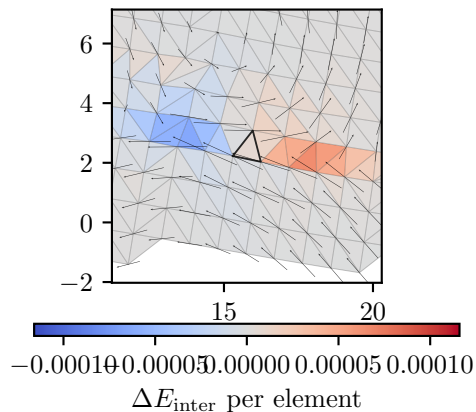

closure residual $x_4 - x_0$

