



reversible_plastic — load 0.16866 — pre


full mesh / $\Delta E_I/V_0=3.64\text{e-}06$ $\Delta E_S/V_0=3.78\text{e-}06$ $\Delta_{rev}u=0.038$ forward m3 changes=72 arrows $\times 10$
selected region

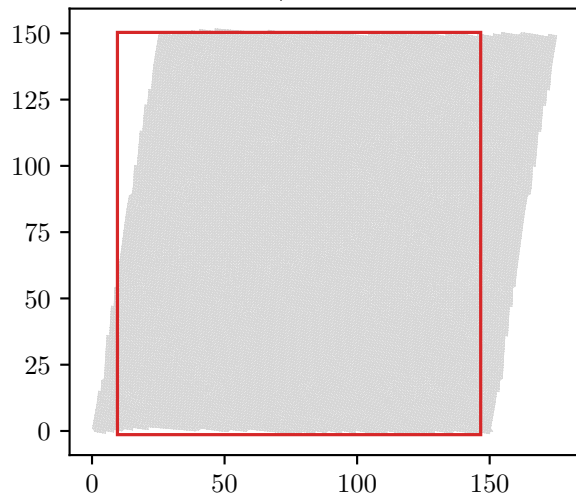

chosen-setting reversible-only scatter

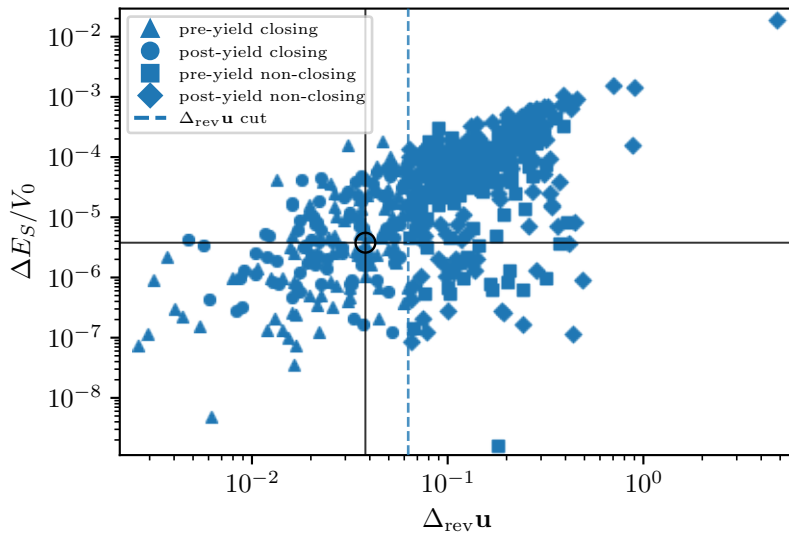

$E_0 - E_2$ with forward relaxation

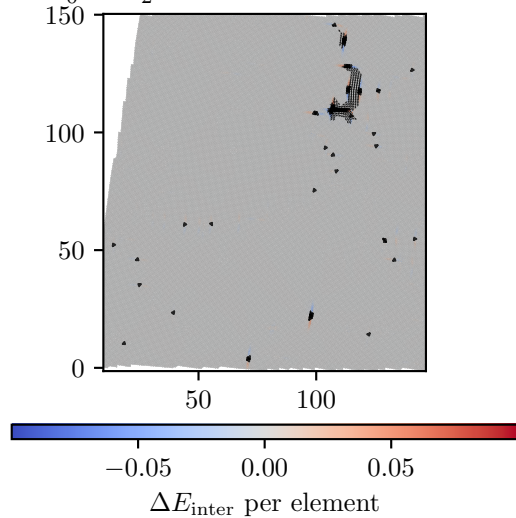

closure residual $x_4 - x_0$

