

DRAWING No.






81360161-30 CS

REV.	
<u>00</u>	IF IN DOUBT, ASK !

FIRST ANGLE PROJECTION

The diagram illustrates the first angle projection of a truncated cone. On the left is the front view, a trapezoid representing the cone's profile, with a horizontal centerline. On the right is the top view, a circle representing the cone's base, with concentric dashed circles indicating the top and bottom surfaces. The views are arranged such that the front view is positioned above the top view, which is a characteristic of first angle projection.

THIS DRG. MUST NOT BE COPIED
WITHOUT WRITTEN PERMISSION
AND THE CONTENTS THERE OF
MUST NOT BE IMPARTED TO A
THIRD PARTY NOR BE USED FOR
ANY UNAUTHORIZED PURPOSES
CONTRAVENTION WILL BE
PROSECUTED.

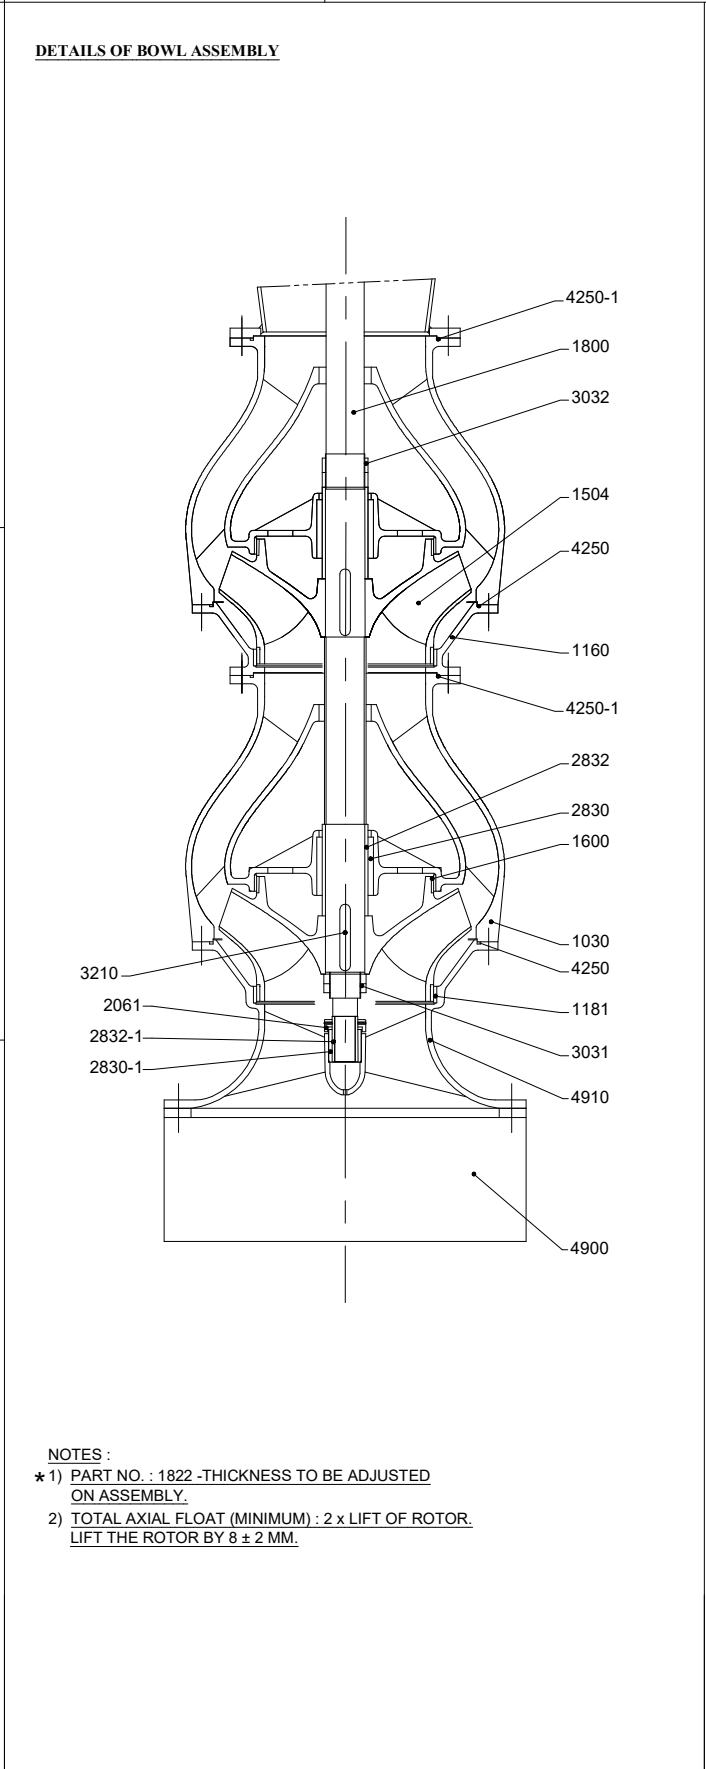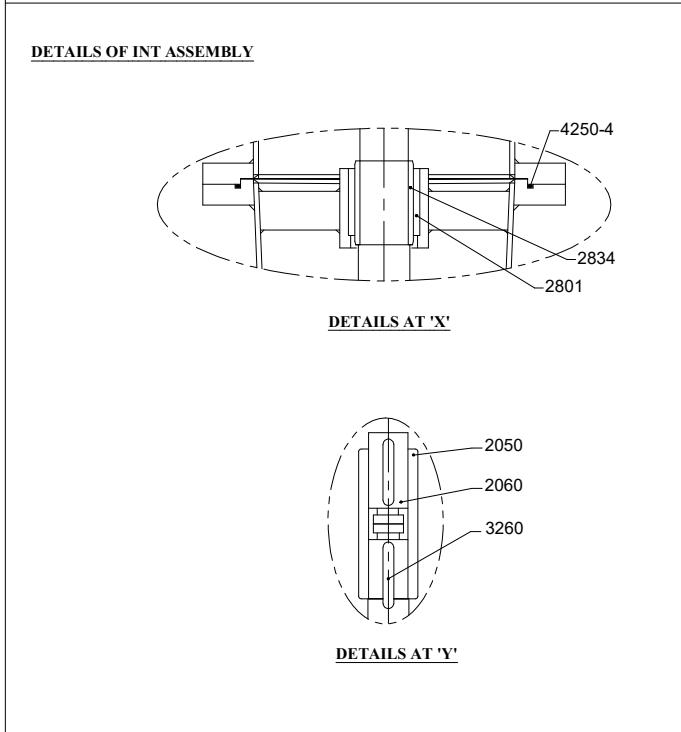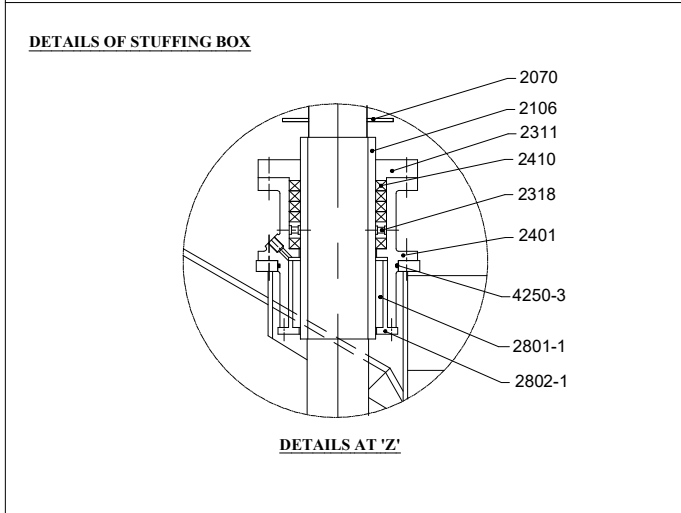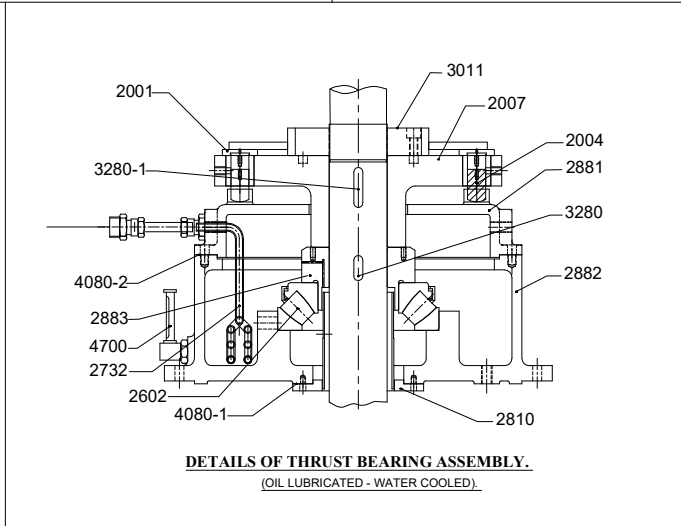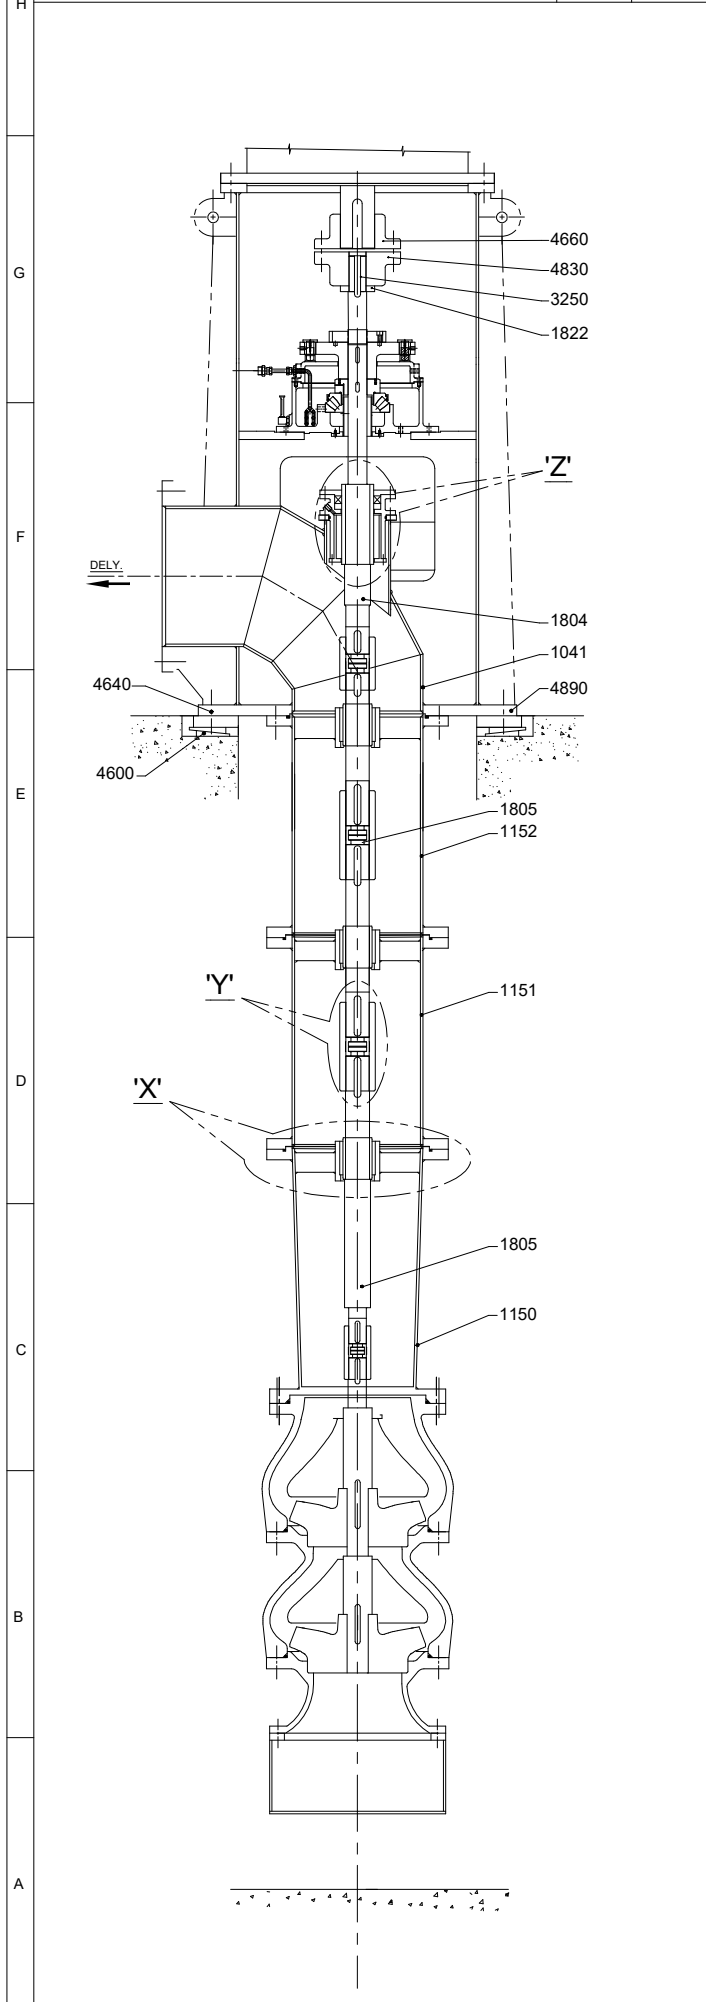

-	FASTNERS (NON WETTED)	AS REQD	ASTM A276 GR SS304
-	FASTNERS (WETTED)	AS REQD	
4910	SUCTION BELL MOUTH	1	FG260 + COATING
4900	SUCTION STRAINER.	1	ASTM A276 GR SS304
4890	SOLE PLATE	1	MS
4830	FLEXIBLE COUPLING (P.H.)	1	FORGED STEEL.
4700	OIL LEVEL INDICATOR	1	MFG.STD
4660	FLEXIBLE COUPLING (M.H.)	1	FORGED STEEL.
4640	FOUNDATION BOLTS	16	M.S.
4600	ERECTION PACKERS.	AS REQD	
4250-4	'O' RING (R.M. PIPE.)	4	
4250-3	'O' RING (ST. BOX)	1	
4250-1	'O' RING (DIFFUSER)	2	NITRILE RUBBER
4250	'O' RING (CONNECTING PIECE)	2	
4080-2	GASKET (FOR BRG. HSG. & OIL BUSH).	1	
4080-1	GASKET (FOR BRG. HSG. & BRG COVER).	1	CHAMPION AF 120.
3280-1	KEY (RATCHET HOLDER PL.)	1	ASTM A276 GR SS410
3280	KEY (THRUST BLOCK.)	1	
3260	KEY (SOLID MUFF COUPLING.)	8	
3250	KEY FOR FLEX. COUPLING	1	
3210	KEY FOR IMPELLER	2	
3032	LOCK NUT	2	
3031	LOCK NUT (IMPELLER)	2	
3011	THRUST BRG. LOCK NUT (L.H)	1	IS:1570, GR.40C8.
2883	THRUST BLOCK	1	
2882	THRUST BRG. HSG.	1	CI IS 210 GR FG260
2881	BRG.COVER CUM RATCHET PLATE	1	ASTM A743, GR.CA15.
2834	INT. BRG. SLEEVE	3	ASTM A276 GR SS410
2832-1	PUMP BRG. SLEEVE (SUCTION BELL)	1	
2832	PUMP BRG. SLEEVE (DIFFUSER)	2	
2830-1	PUMP BRG. BUSH (SUCTION BELL)	1	
2830	PUMP BRG. BUSH (DIFFUSER)	2	CUTLESS + SS410
2810	OIL RETAINER BUSH.	1	M.S. IS:2062, GR.E250 BR.
2802-1	ST. BOX. BUSH CARRIER	1	CI IS 210 GR FG260
2801-1	BRG. BUSH (ST. BOX)	1	CUTLESS + SS410
2801	INT. BEARING BUSH	3	
2732	COOLING COIL.	1	COPPER
2602	SPHERICAL ROLLER THRUST BRG.	1	NO. 29438 E
2410	GLAND PACKING.	AS REQD	GRAPHITED COTTON.
2401	LOOSE STUFFING BOX	1	CI IS 210 GR FG260
2318	LEAK OFF BUSH	1	
2311	GLAND.	1	
2106	GLAND SLEEVE	1	ASTM A276 GR SS410
2070	WATER DEFLECTOR	1	NITRILE RUBBER
2061	SAND COLLAR	1	M.S. IS:2062 GR-B
2060	SPLIT COLLAR	4	ASTM A276 GR SS410
2050	SOLID MUFF COUPLING	4	
2007	RATCHET HOLDER PLATE	1	C.S. ASTMA-216 GR-WCB
2004	RATCHET PIN	12	SS410 HARD CHROME PLT.
2001	RATCHET BUSH	12	EN24 NICKEL PLATED
1822	ADJUSTING RING	1	M.S.IS:2062 GR.'B'
1805	INT. SHAFT	3	ASTM A276 GR SS410
1804	TOP SHAFT	1	
1800	PUMP SHAFT	1	
1600	IMPELLER WEAR RING	4	ASTM A743GR CA6NM
1504	IMPELLER	2	ASTM A743 GR CA6NM + COATING
1181	NECK RING	4	ASTM A743 GR CA15/SS410
1160	CONNECTING PIECE	1	CI IS 210 GR FG260
1152	R.M.PIPE (TOP)	1	M.S.
1151	R.M.PIPE (INT)	1	
1150	R.M.PIPE (BOTTOM)	1	
1041	DELIVERY BEND & MOTOR STOOL	1	
1030	CASING & DIFFUSER	2	CI IS 210 GR FG260 + COATING
REF.	DESCRIPTION	QTY.	MATERIAL.

NOTES :

★ 1) PART NO. : 1822 -THICKNESS TO BE ADJUSTED ON ASSEMBLY.

2) TOTAL AXIAL FLOAT (MINIMUM) : 2 x LIFT OF ROTOR.
LIFT THE ROTOR BY 8 ± 2 MM.

A															WILO MATHER AND PLATT PUMPS PVT. LTD.,PUNE-19.			
															CROSS SECTION OF VMF 65C, 2-STAGES PUMP			
															SCALE: N.T.S.			
											DRAWN BY	SSS	28.02.2026	DRAWING No. <u>81360161-30 CS</u>				<u>00</u>
											CHECKED BY	VAM	28.02.2026					
											APPROVED BY	VMS	28.02.2026					
REV.	REVISION										ZONE	DATE	INITIAL	CHD.				