


Odrive Micro Driving Structure

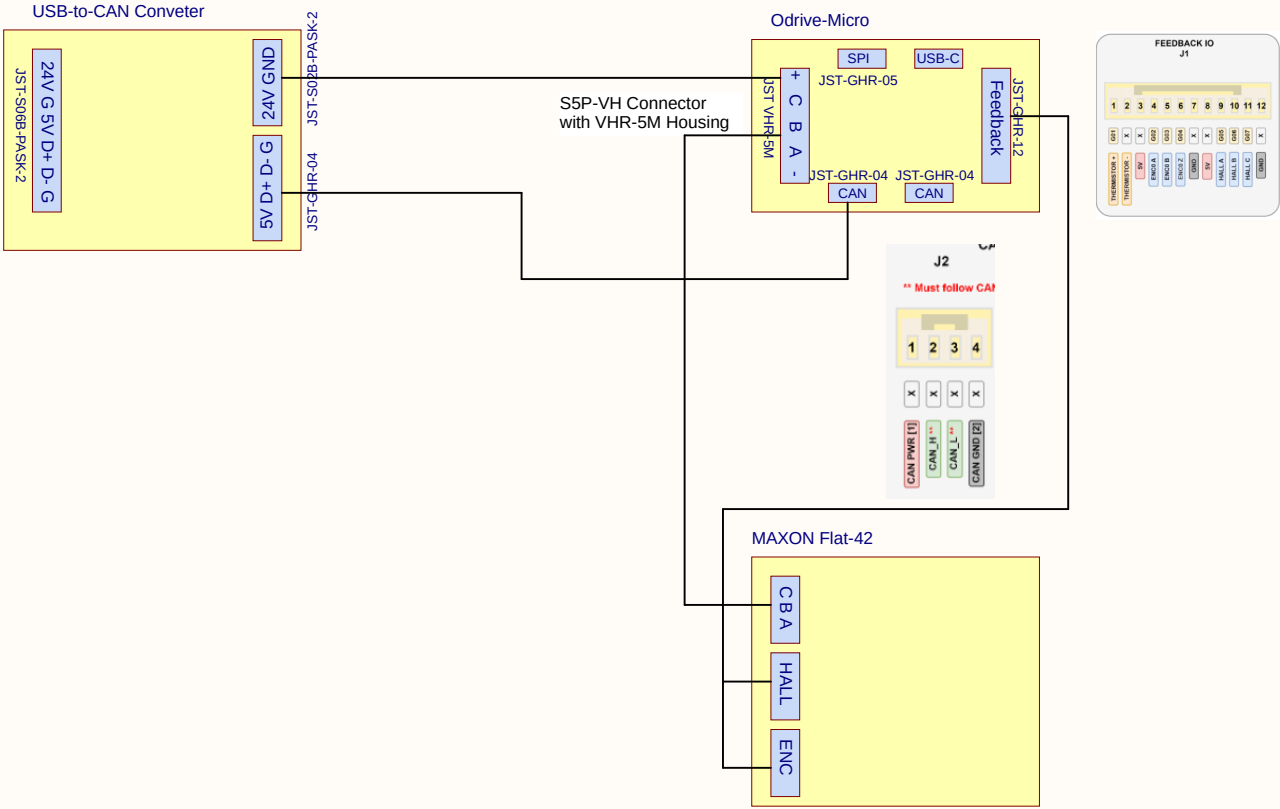



Connections, motor (cable AWG 18)
Pin 1 Motor winding 1
Pin 2 Motor winding 2
Pin 3 Motor winding 3
Pin 4 N.C.
Connector, Part number
Molex, 39-01-2040

Connections, sensors (cable AWG 28)
Pin 1 Hall sensor 1
Pin 2 Hall sensor 2
Pin 3 Hall sensor 3
Pin 4 GND
Pin 5 V_{cc} 2.7...24 VDC
Pin 6 N.C.
Connector, Part number
Molex, 43025-0600


Specifications	
Supply voltage V_{cc}	5V ±5%
Typical current draw	15 mA
Max. operating frequency	1000 kHz
Max. speed	10000 rpm
Connector	10-pin 2.54 mm multipoint connector (IEC/EN 60603-13 / DIN41651)
Pin 1 not connected	
Pin 2 V_{cc}	
Pin 3 GND	
Pin 4 not connected	
Pin 5 channel A	
Pin 6 channel A	
Pin 7 channel B	
Pin 8 channel B	
Pin 9 not connected	
Pin 10 not connected	




MCU

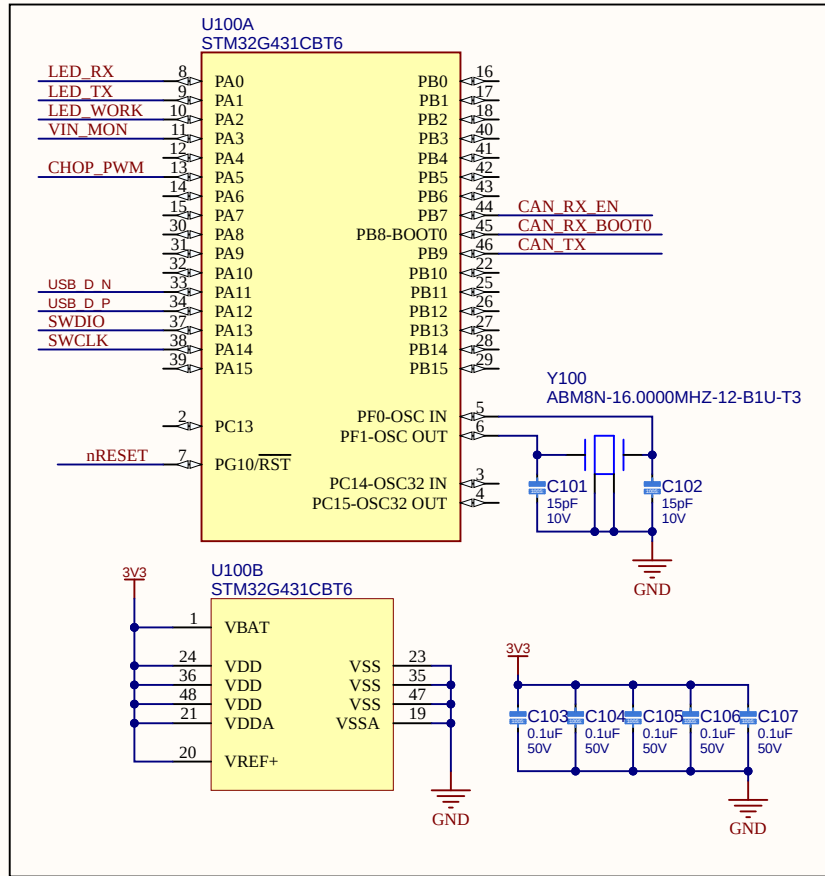


Status LED

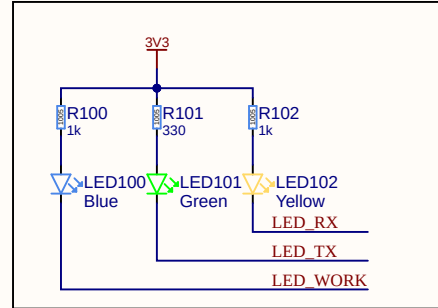


Mode Select Switch

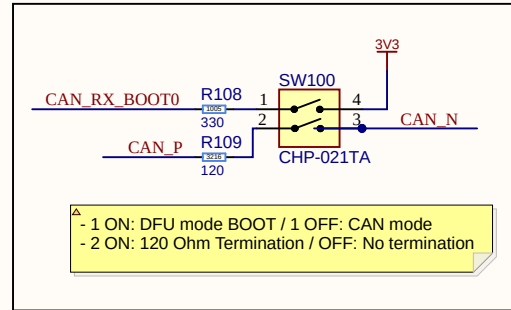


CAN Transceiver (Non-isolated)

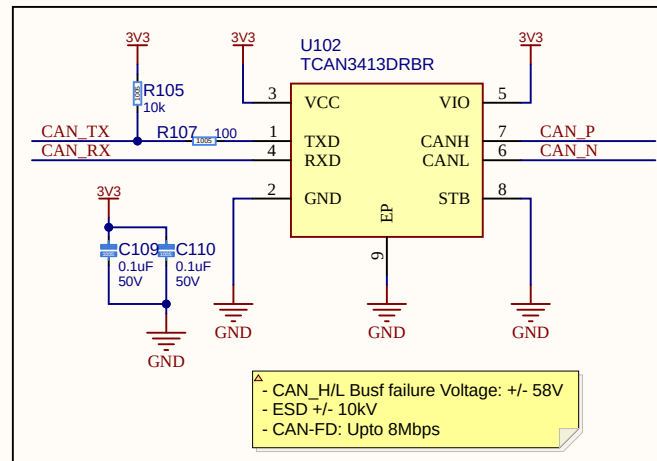

CAN Output port

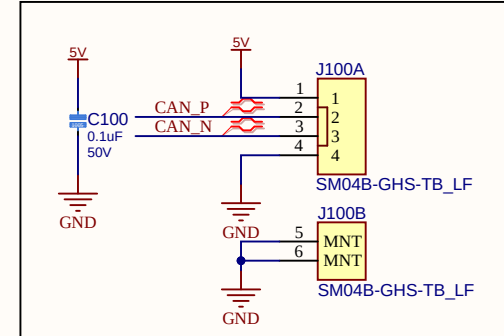

Mode Select Switch

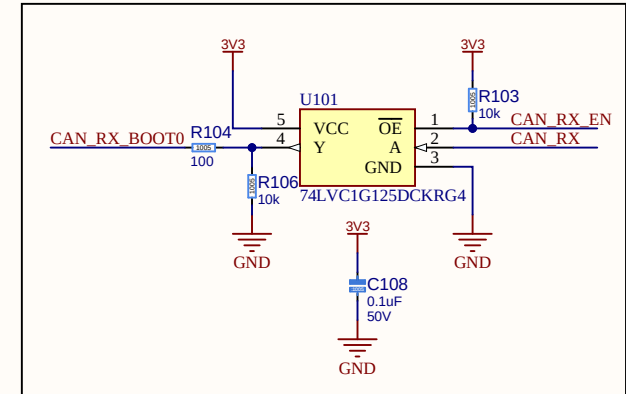

Title UCB(USB-to-CAN)

Author David Kim

Approved by David Kim

2026-06-07

2 of 3 | 01

