

RuggedBoard-I.MX6 ULL SOM (Industrial Pico Computer)

Copyright 2018 PHYTEC TECHNOLOGIE HOLDING AG

INFORMATION IN THIS DOCUMENT IS PROVIDED SOLELY FOR USE IN CONJUNCTION WITH THE PHYTEC PRODUCT DESCRIBED HEREIN. NO INTELLECTUAL PROPERTY RIGHTS -- EXPRESS OR IMPLIED -- ARE GRANTED THROUGH THIS DOCUMENT. LIKEWISE, PHYTEC MAKES NO EXPRESS OR IMPLIED WARRANTIES OF ANY KIND, WHETHER AS TO MANUFACTURABILITY; MERCHANTABILITY; FITNESS FOR A PARTICULAR PURPOSE; OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. SPECIFICATIONS HEREIN ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE.

PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-I.MX6 UL (Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-1P3	Rev:1P3	Sheet: 1 of 15

Block Diagram

Cannot open file D:\RB-imx6ul\Rev1P3\NEW_IMX6UL_1P3\RB_PhyCORE_IMX6ULL_Rev1P3_01 (29-12-2020 11-32-28)\BD-RB-imx6ul.jpg. File does not exist.

PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-LMX6 UL (Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-1P3	Rev:1P3	Sheet: 2 of 15

Revision History


Revision	Date	SL#	Change Description
1P0	15-03-19	01	First Version Release Rev 1P0
1P1	12-09-19	01	Change in version number 1P1 (Board# RB-iMX6UL-1.1)
		02	Added On Board External RTC IC Interface circuit (2nd option)
		03	Added Pull-up 10K at SW1 and net moved to expansion "X_ENET2_TX_CLK_GPIO2_IO14_GSM-Rst
		04	RS485 DE and RE# connected together via a 0R and Conneceted to SOM GPIO and also added 120R A,B Port
		05	Added a Reverse voltage protection diode in in line with VBUS Port
		06	mPCI Port USB Made default Port @ U7 IC
		07	Removed LCD backlight Circuit (ITs a part of Mapper board)
		08	LCD RGB Signals Mapped with PEB-AV-02 Design
		09	Reduced expansion Header Pin counts
		10	
		11	
1P2	18-12-19	12	Refer Change list Note Pad file
		13	
		14	
		15	

PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-I.MX6 UL (Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-1P3	Rev:1P3	Sheet: 3 of 15

Project Overview



Page#	SCHEMATIC TITLE		
01	Introduction		
02	Block Diagram		
03	Revision History		
04	Project Overview		
05	SOM CONNECTOR- QUAD SMD Pads with GND Pads Bottom		
06	Power Management and RTC Circuit with User LED's		
07	Ethernet RJ45 CONN: 10/100Mbps and Serial Ports RS232 Full modem		
08	mPCIe CONN and Hybrid CONN (uSIM & uSD Sockets)		
09	Serial Port RS485_CAN and Debug Console		
10	Digital IN and Digital Out HDR's		
11	USB Host and Power Limit Switch		
12	Micro-BUS HDR Female Dual Row and Wifi ATWIL1000 /eMMC Module		
13	Expansion Female Header		
14	SOM Boot Configuration and Selection Circuit		
15	Board Stack up info		
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32		PHYTEC	PHYTEC Embedded I HSR Layout, Bangalo
33			
34		Project Name:	Department: Design and D

PHYCORE-I.MX-6ULL SOM Module

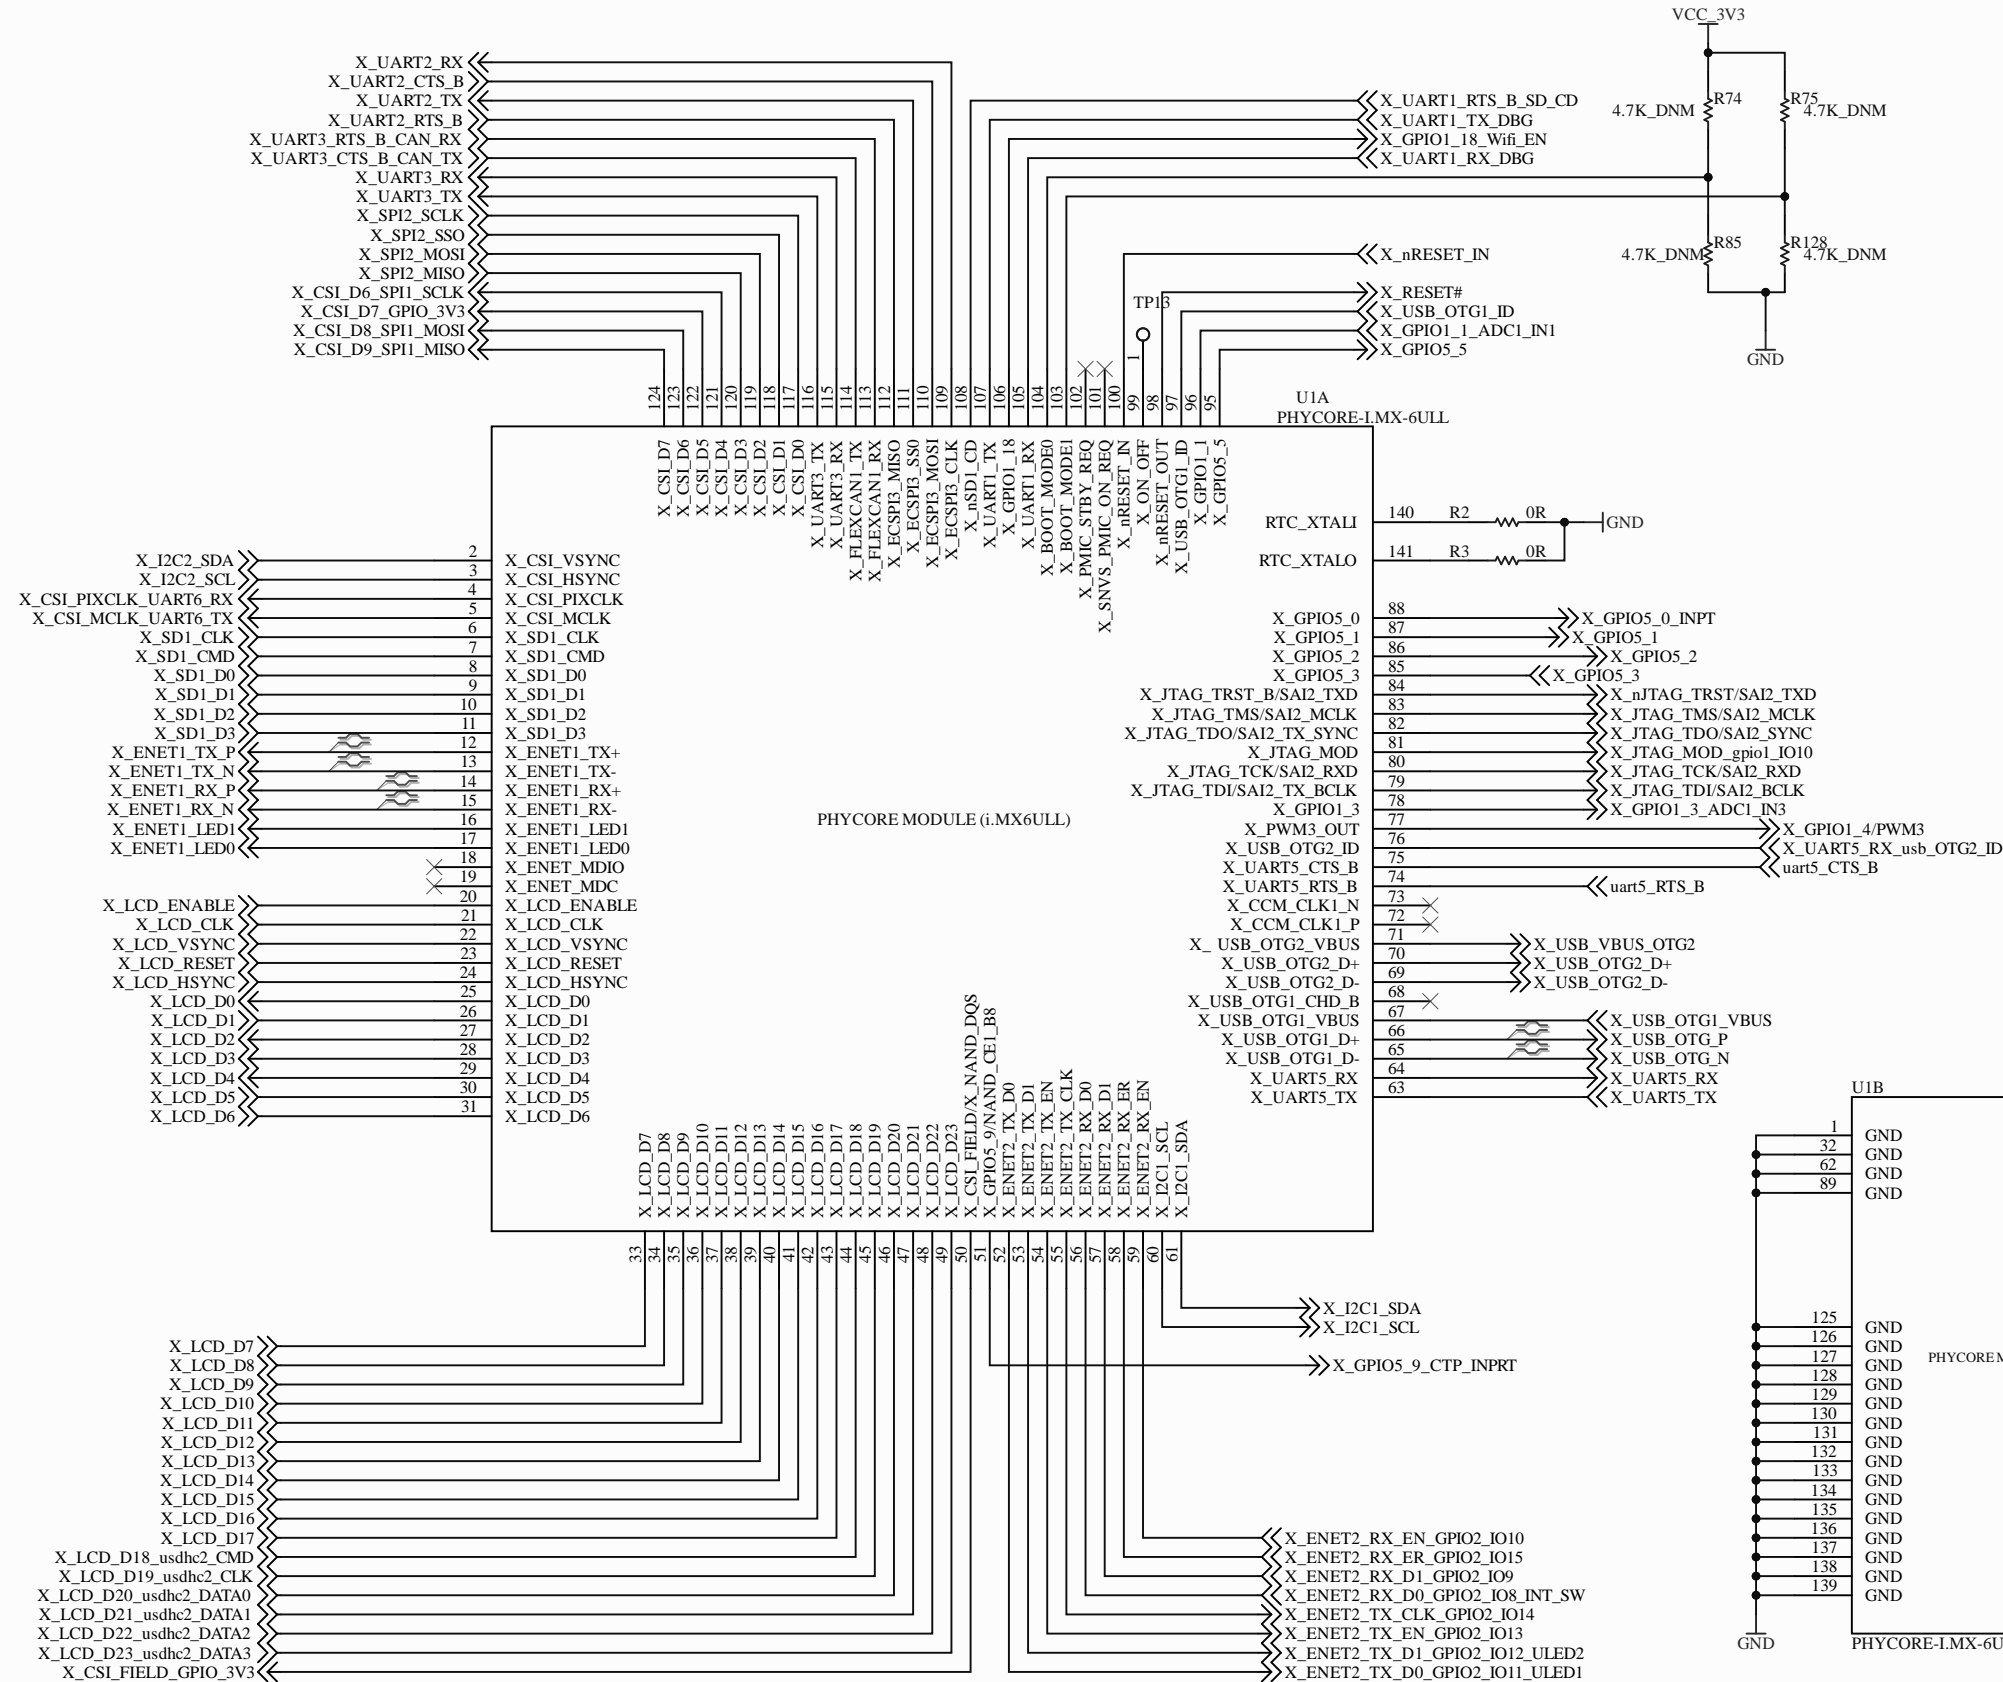


System-On-Module Power Pin Description


SOM_3V3	Main 3.3V Supply inputs.	~3.3V
---------	--------------------------	-------

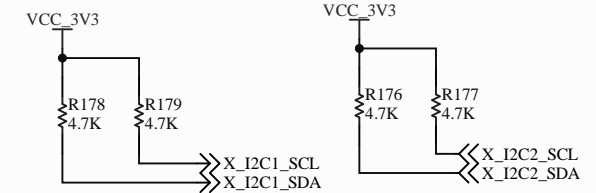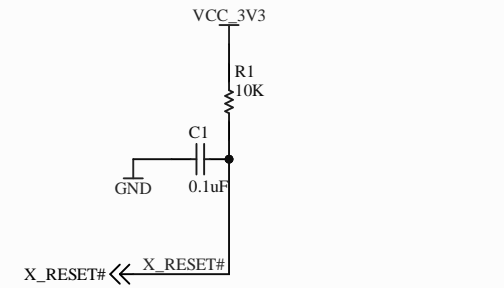

Tamper Pinout:#51,85,86,87,88 and 95

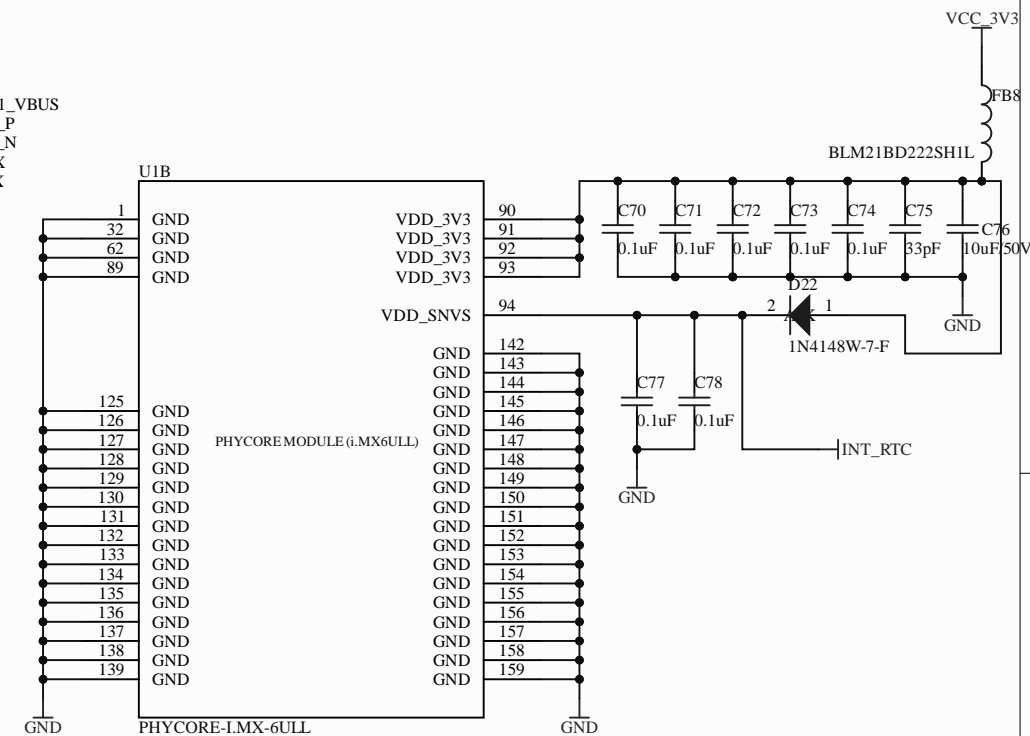


PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-L.MX6 UL(Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-1P3	Rev:1P3	Sheet: 5 of 16

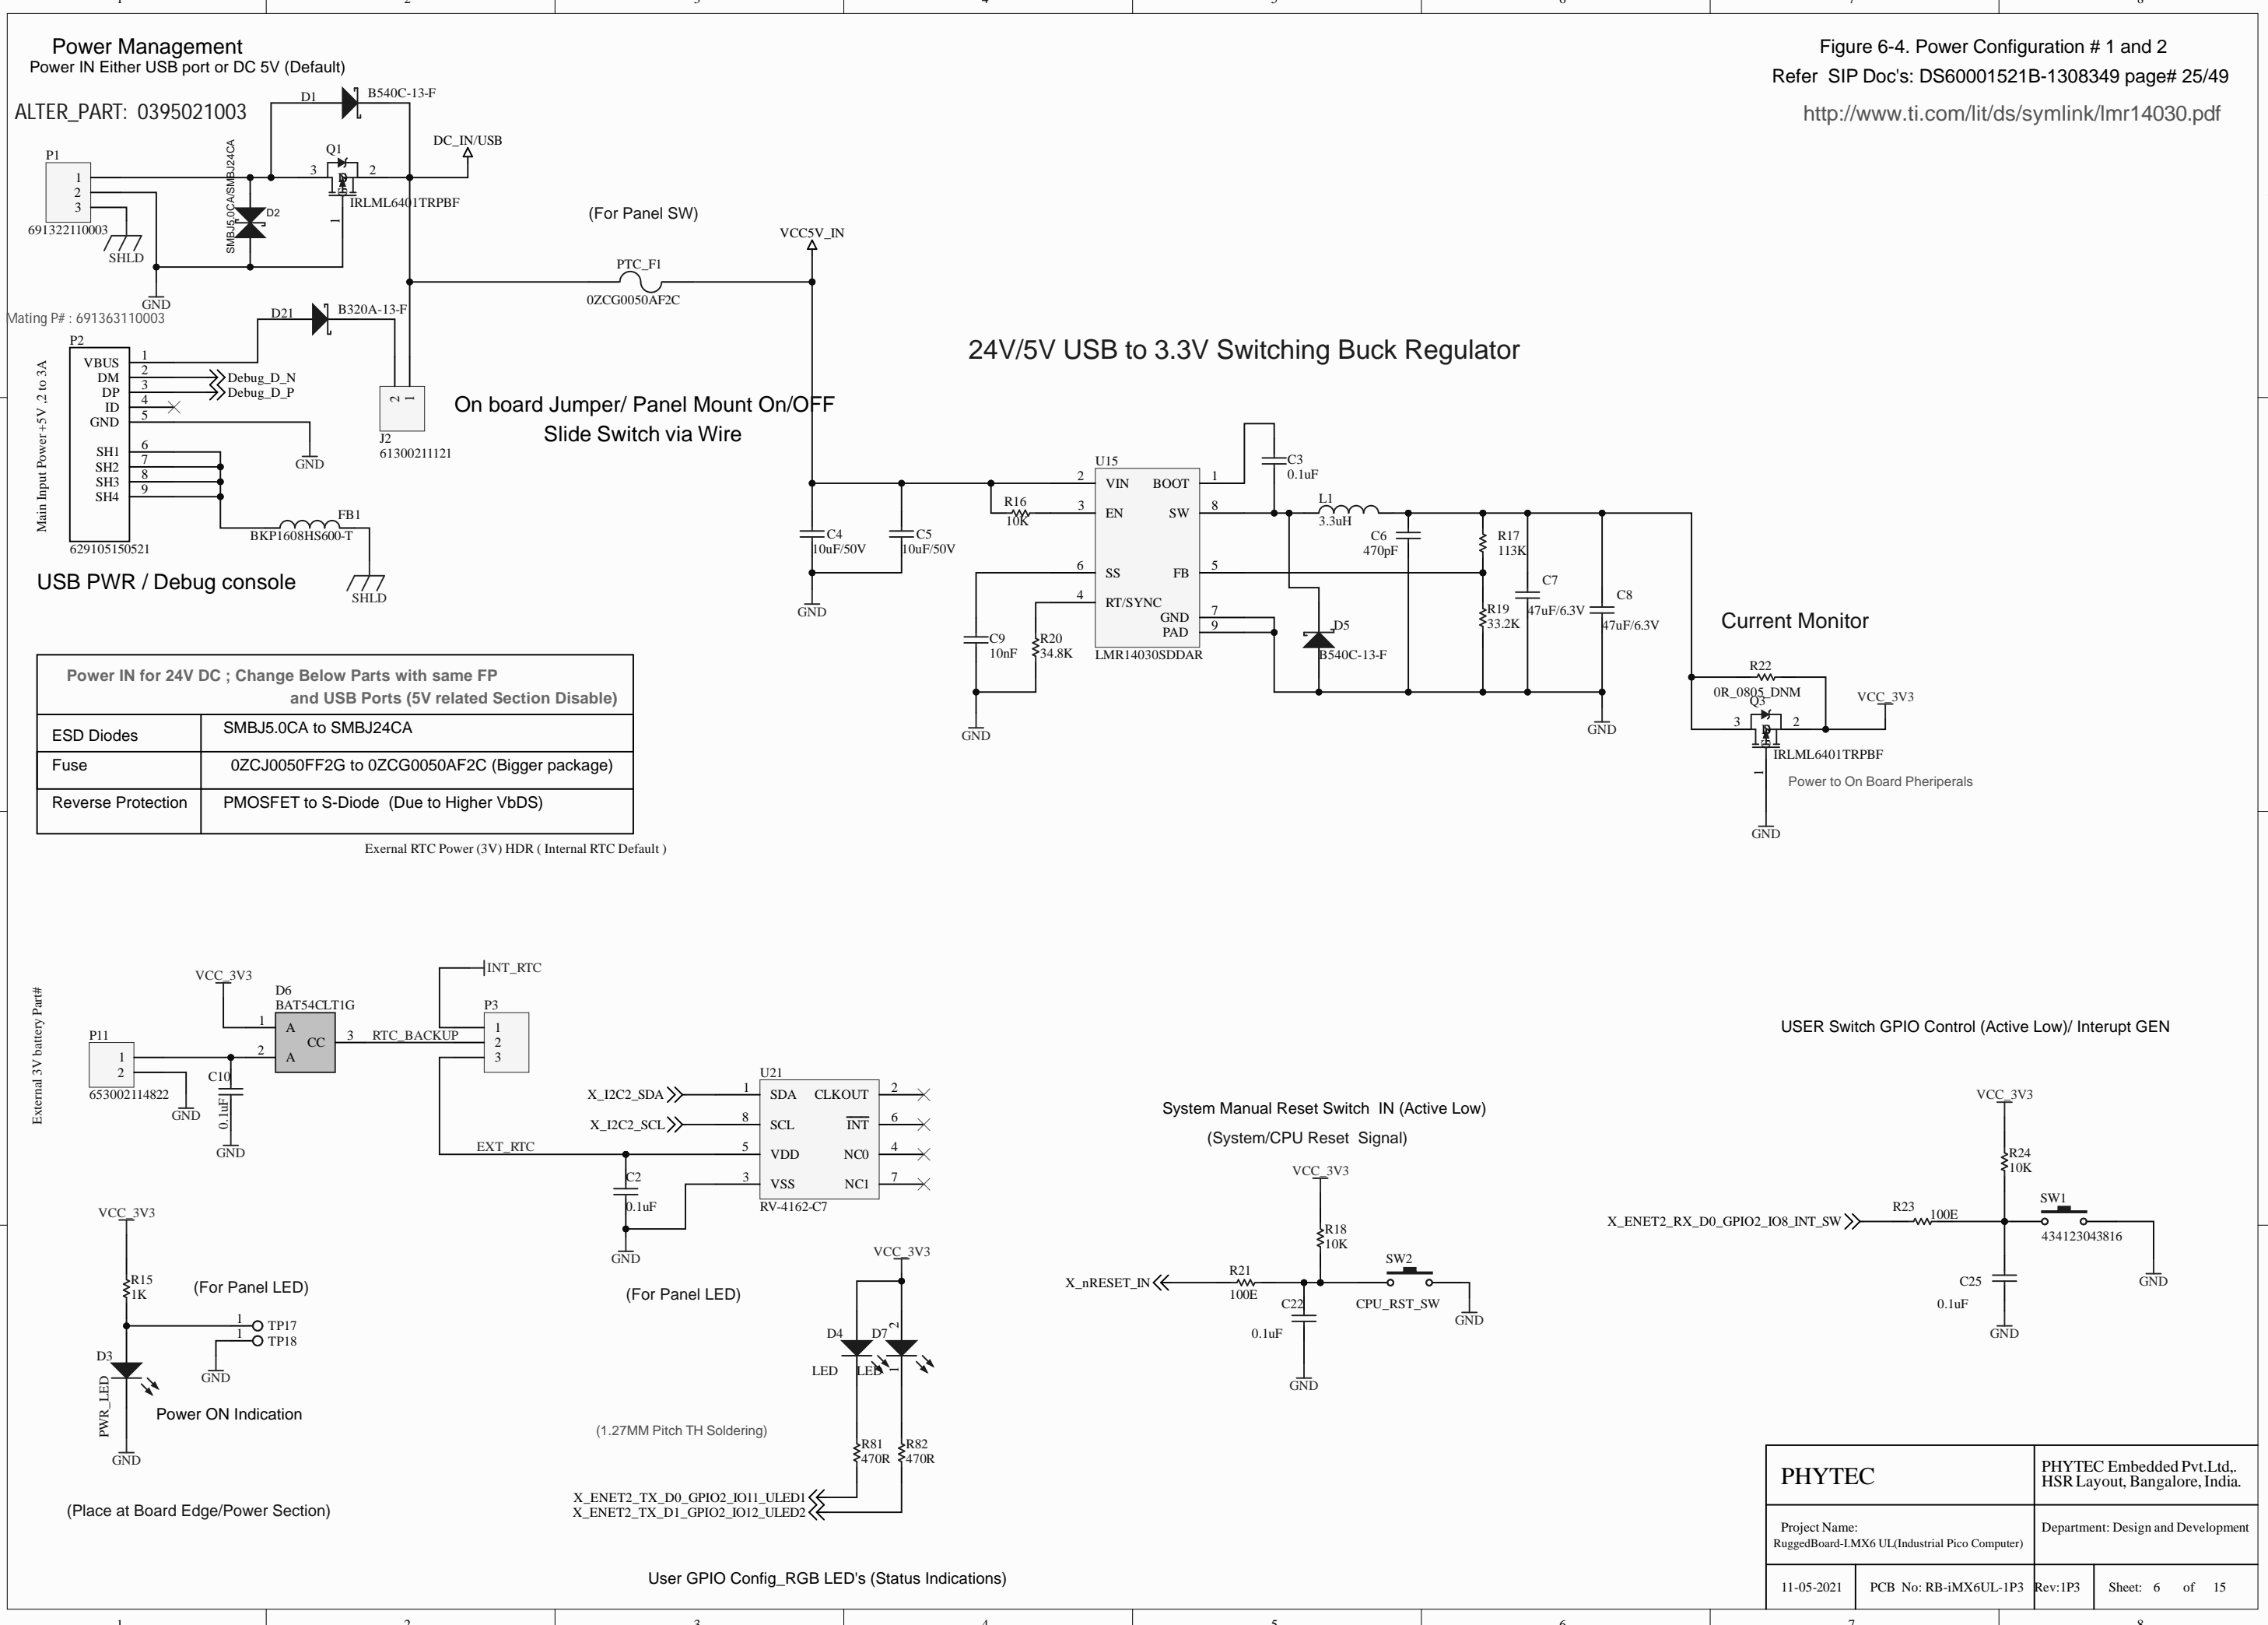


Ethernet RJ45 CONN 10/100Mbps

Industrial Grade: -40°C ~ 85°C
Part# 74990112121
Make: WE

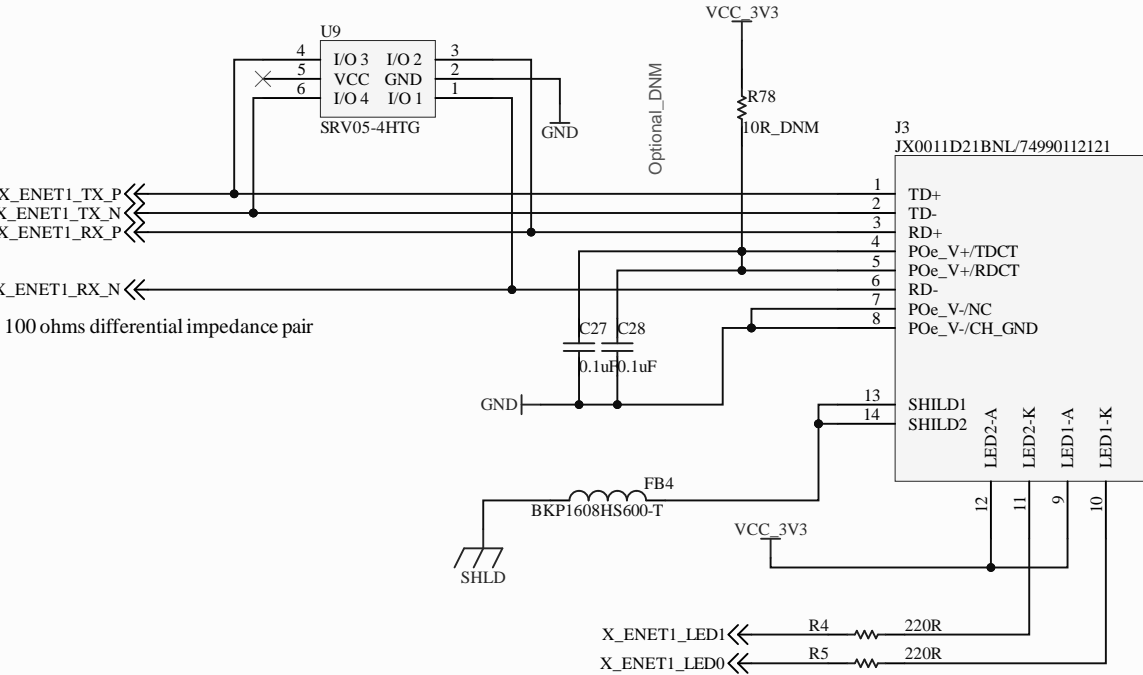


Serial Port; RS232 x 2 (1 With RTX,CTS)

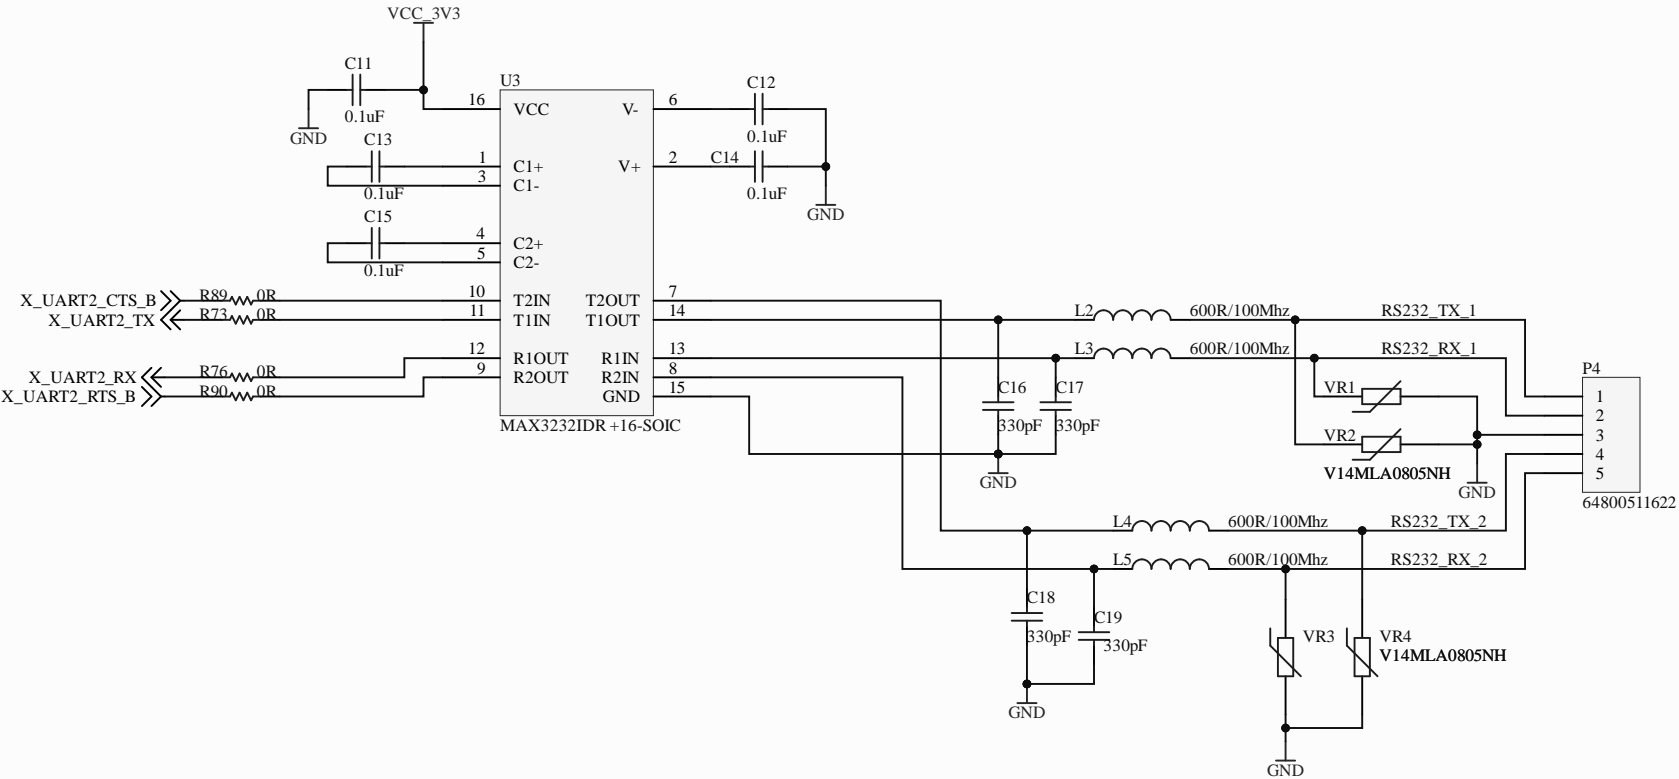


PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-IMX6 UL(Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-IMX6UL-1P3	Rev:1P3	Sheet: 7 of 15

Mini PCIe SLot with SIM Conn (3G/4G Modem without SIM Socket)

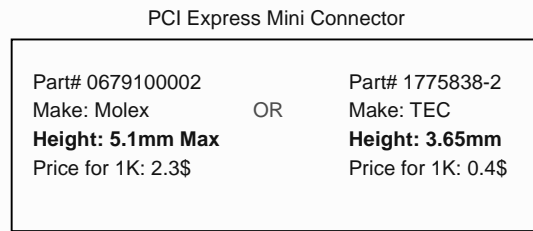


OR

Part# 0679105700
Make: Molex
Height: 5.10mm
Price for 1K: 2.52\$

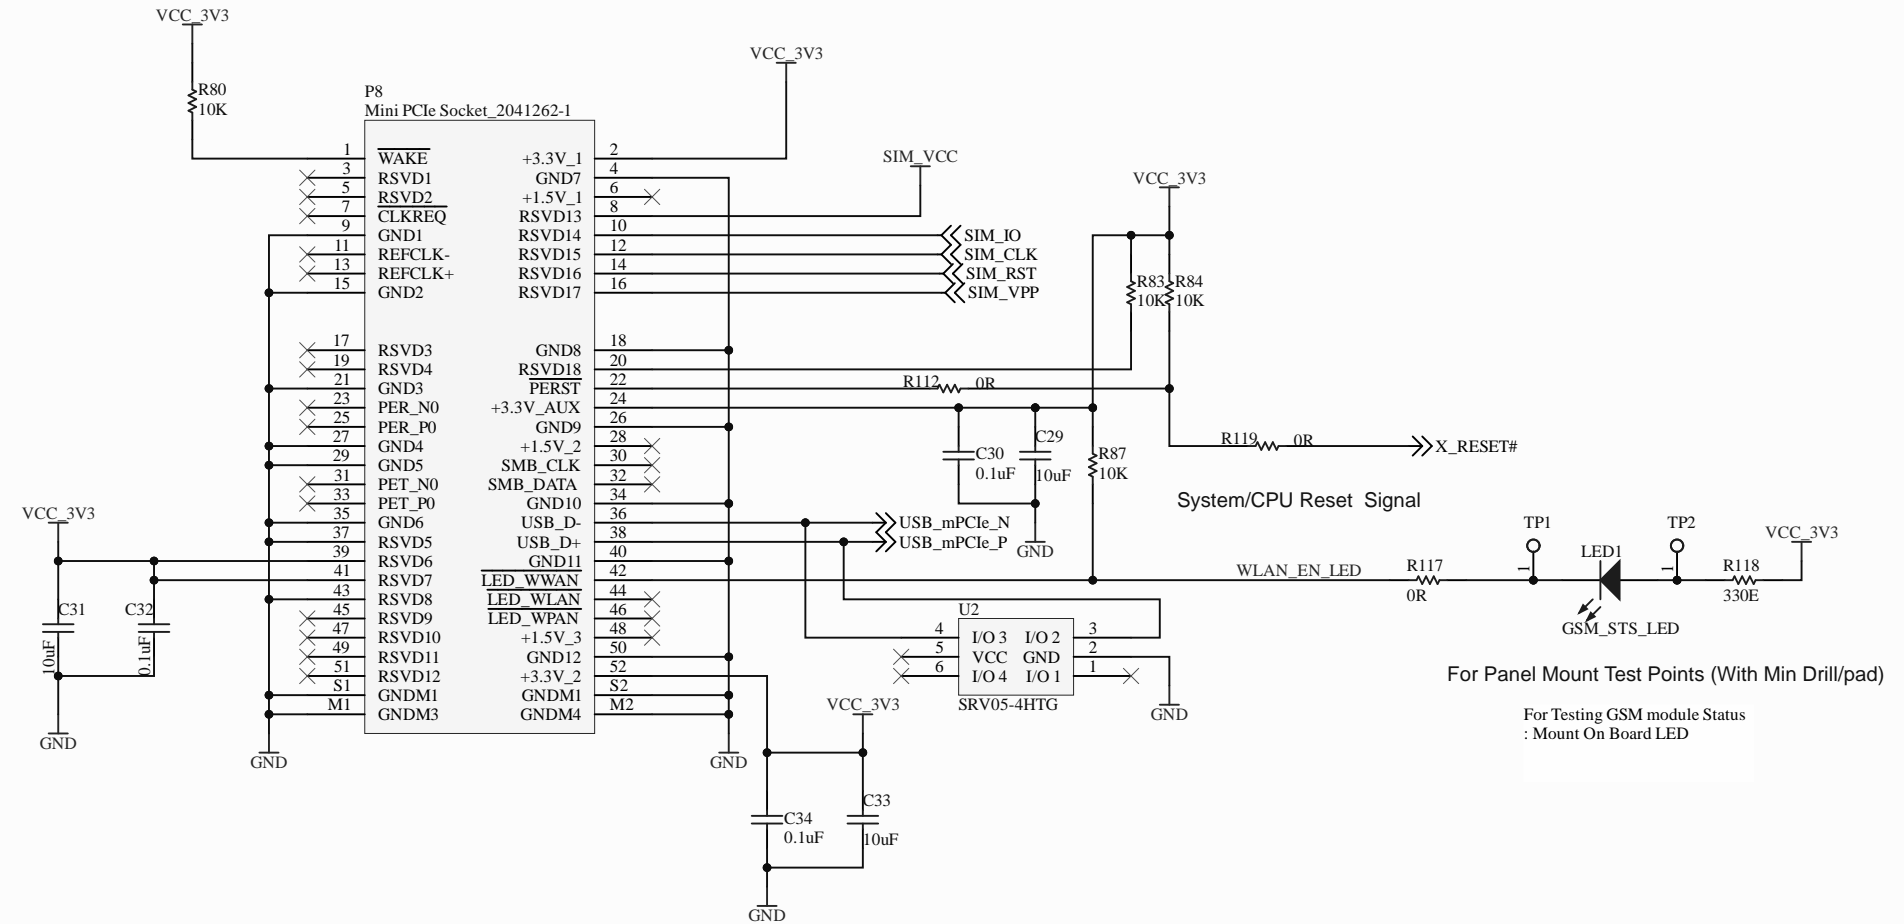

Hybrid Slot (Micro SD Card and Micro SIM)

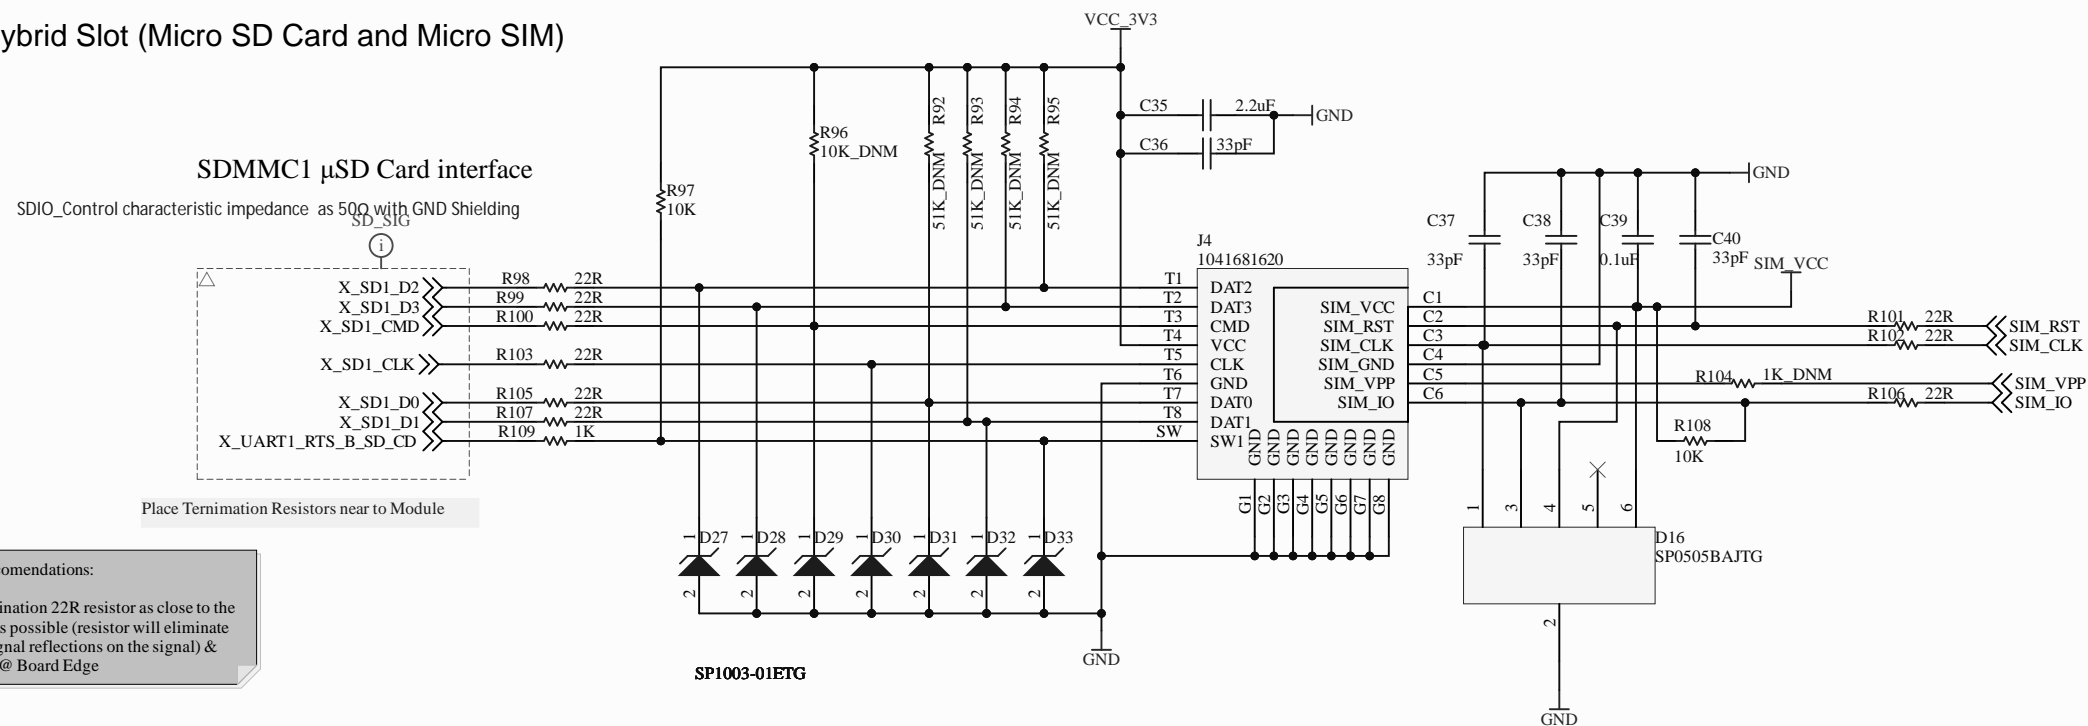


Layout Recommendations:


Place Termination 22R resistor as close to the processor as possible (resistor will eliminate possible signal reflections on the signal) & Connector @ Board Edge

PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-IMX6 UL(Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-IP3	Rev:IP3	Sheet: 8 of 15

Serial Interface RS485 and CAN

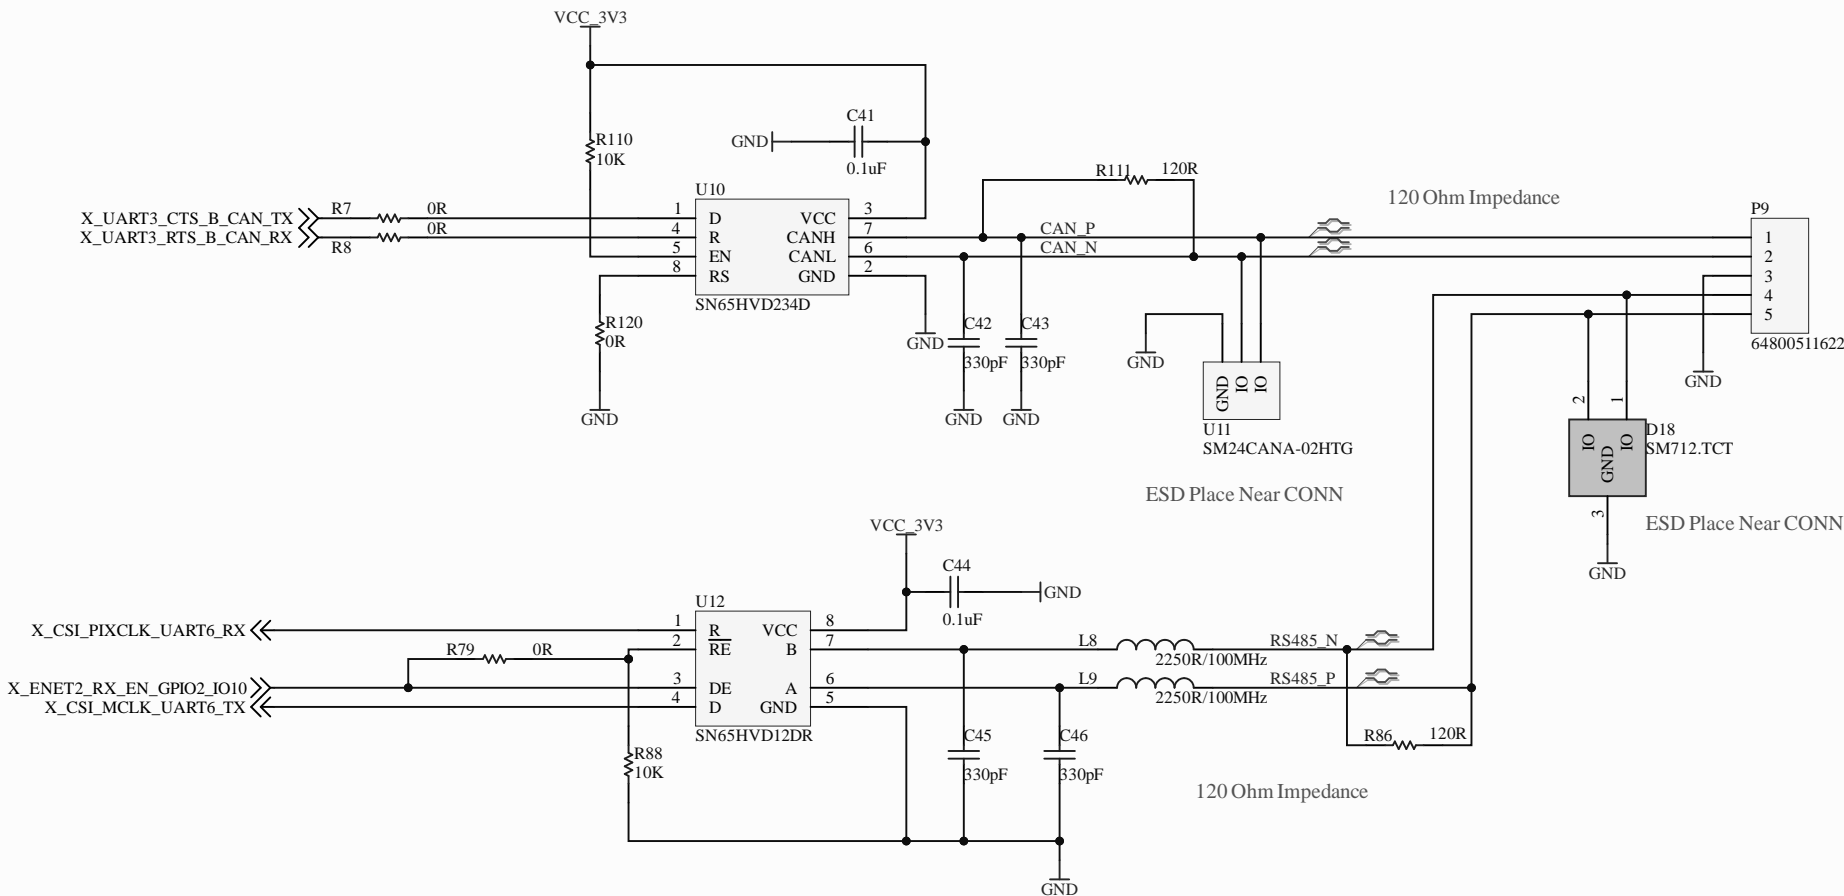

USB Debug Port (UART to USB) /TTL Debug Port (3.3V)

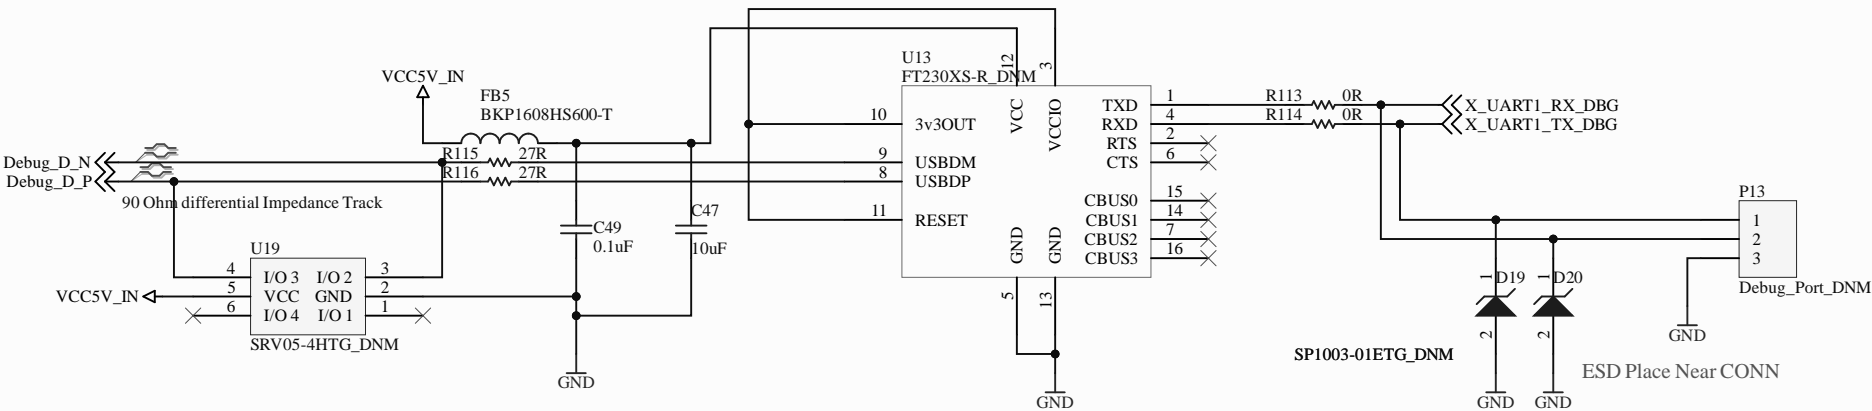




FTDI Chip (First Option)

Debug Port;TTL 3V3
(Second Option: To Use above Port to Isolate FTDI Chip)

PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-IMX6 UL(Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-1P3	Rev:1P3	Sheet: 9 of 15

ISOLATED DIGITAL INPUT /OUTPUTS (From 0 ~ 24V)

Note:
Default State of Digital Input (Low) and Defined as Input Port
When Isolated Voltage connected upto 24V from external ; MCU reads High (3.3V)

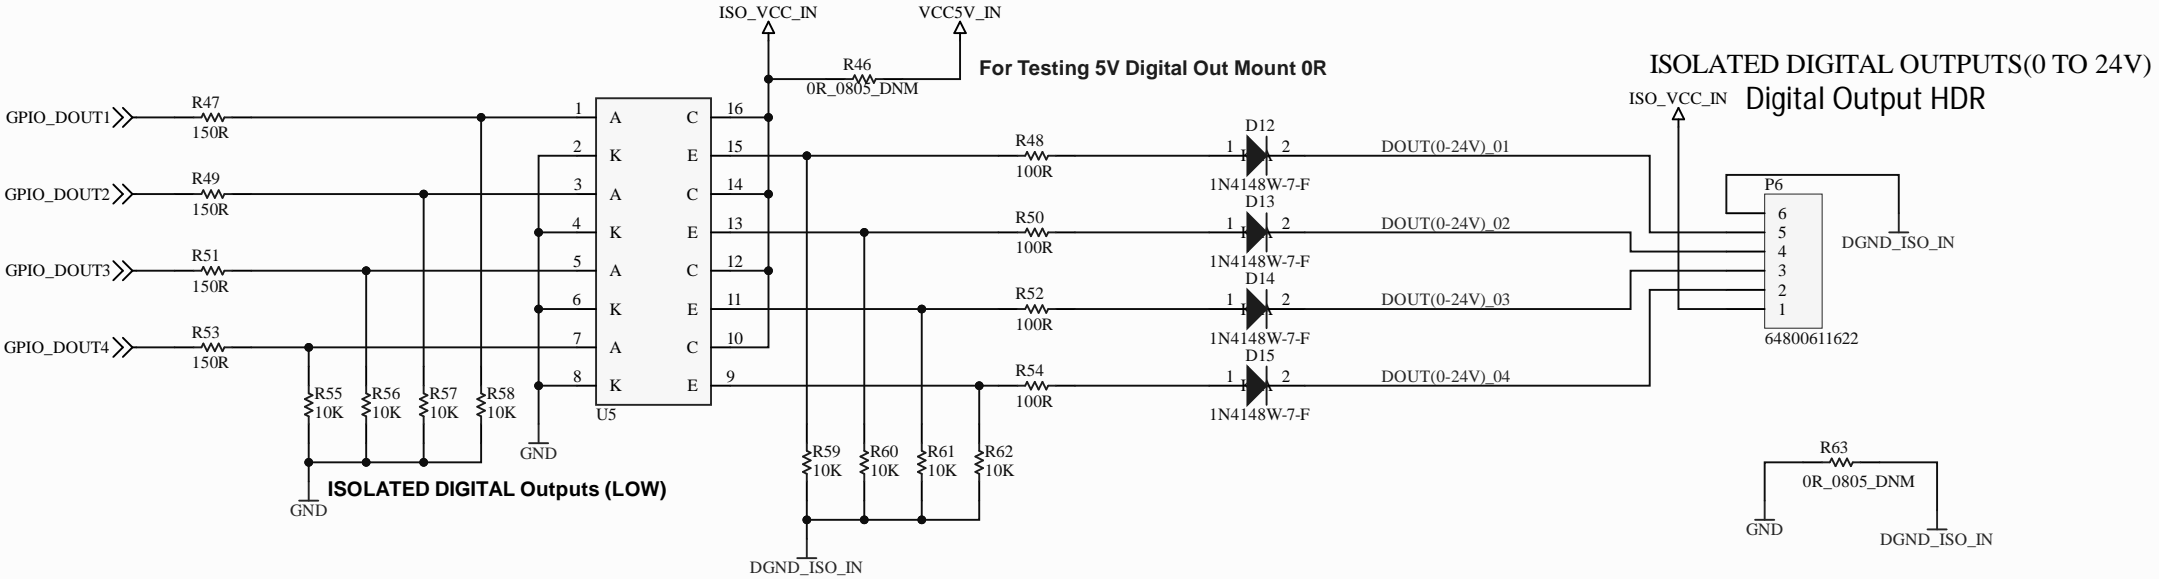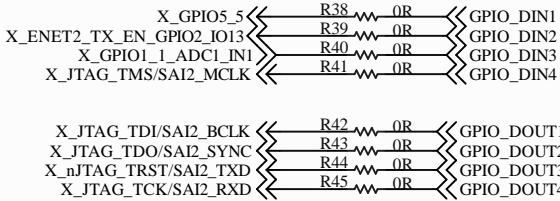
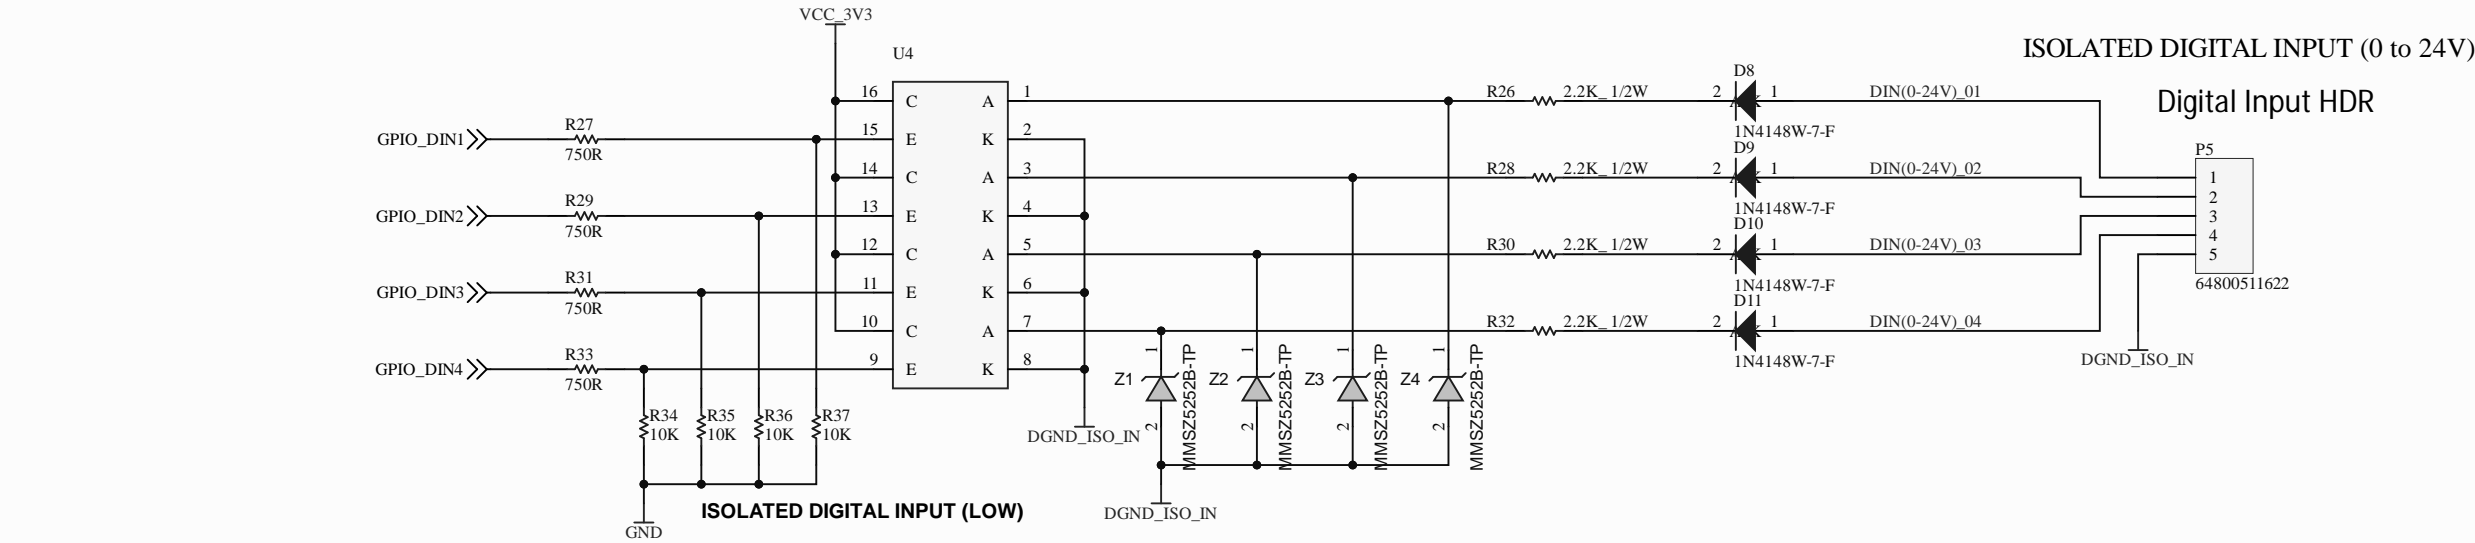


Note:
Default State of Digital output (Low) and Defined as Output Port
When Isolated Voltage connected upto 24V from external ;At SOM configured as Out (High :3.3V)
the Opto Triggers & Send Isolated VCC to Out (Default Output Is LOW (Pulled Down))

PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-IMX6 UL(Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-1P3	Rev:1P3	Sheet: 10 of 15

USB Host 2.0 x 2 Ports (One Port Splitted to mPCIE)


USB 2.0 MUX Switch IC (SPDT) - Bidirectional IC

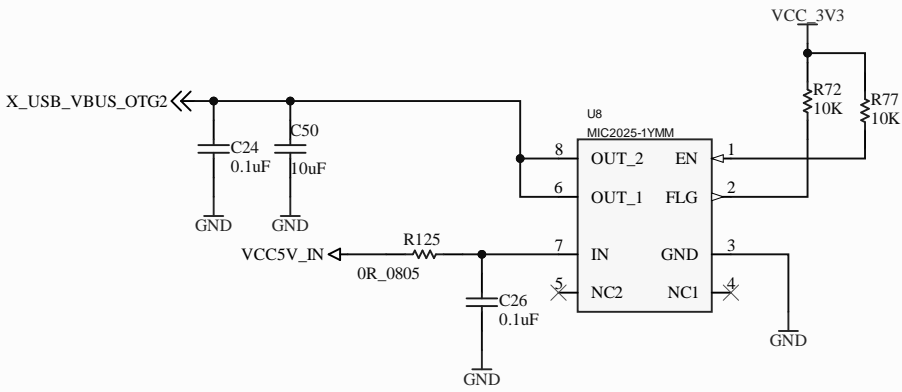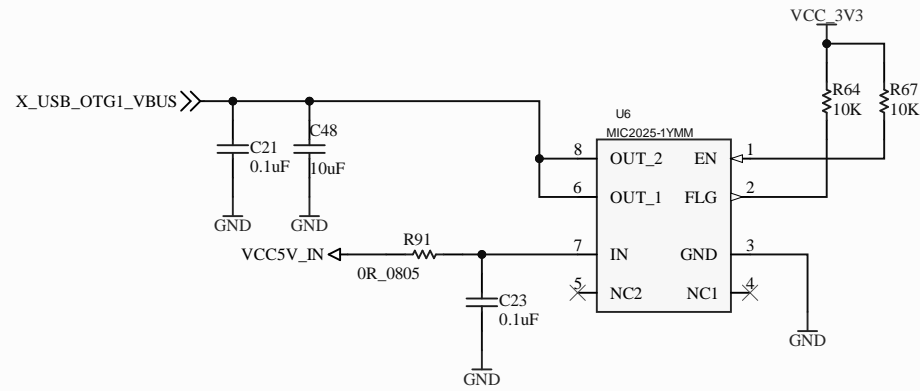


USB Do Not Use when main Input is 24V DC

(Remove Power In-line resistor 0R / At SW Disable EN Pin (default))


(Active Either USB Host Port /mPCIE Port)

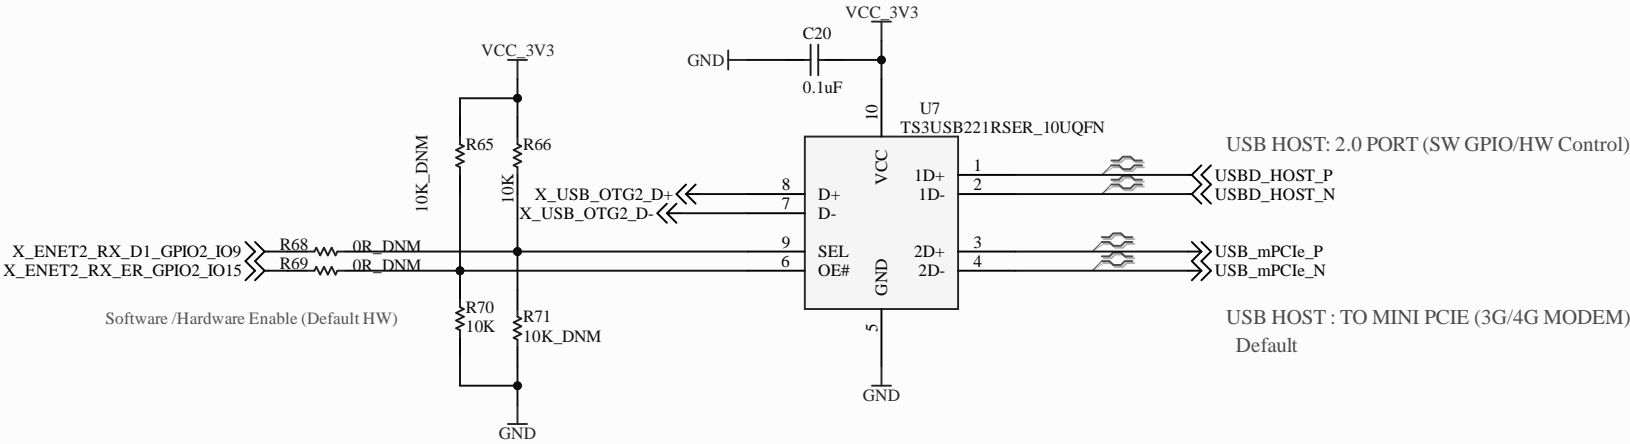

USB 2.0 Host Stack USB Port

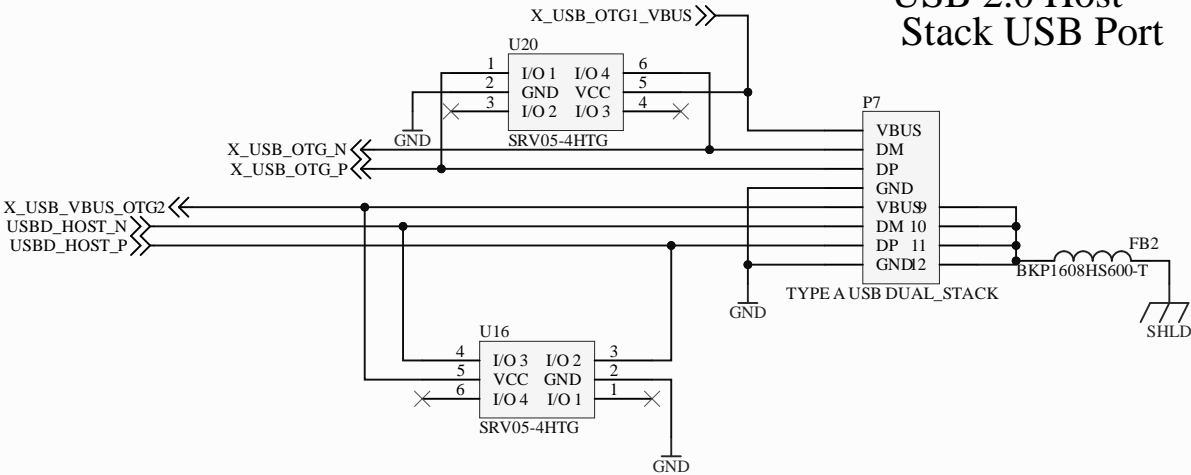

ESD Diodes

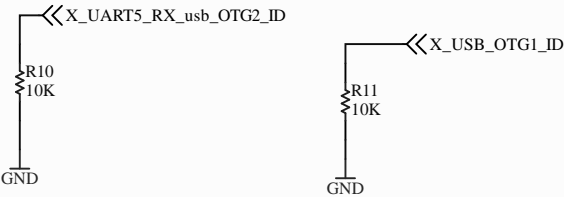

Note:

USB-A HOST : Direct data lines Interface from SOM
USB- B Host : Datalines shared between USB HOST CONN (Default)
and mPCIE Slot via a USB Mux GPIO Selection

Truth Table : USB MUX Switch Operation


S	OE#	FUNCTION
X	H	Disconnect
L	L	D = 1D
H	L	D = 2D

Default

PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-IMX6 UL(Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-IMX6UL-1P3	Rev:1P3	Sheet: 11 of 15


MikroBUS Module HDR (2.54mm Female) & Wifi/BT eMMC Module

Module PCB Footprint (XY Distance) Dimension Refer below
https://developer.mbed.org/users/allankliu/code/LPC1114_EBadge/wiki/MiniNote-with-mikroBUS

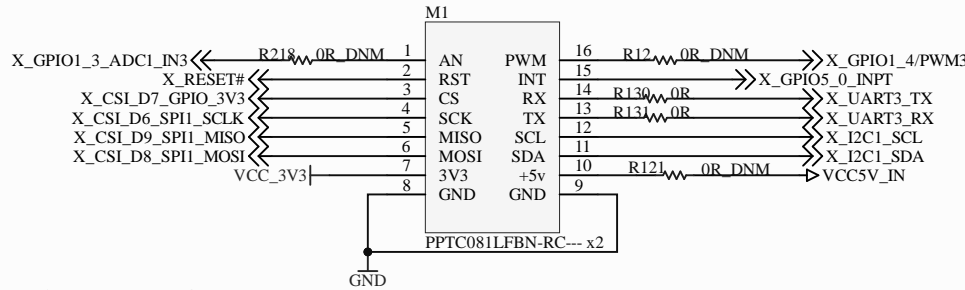

MOD BLUETOOTH/WIFI CHIP (With PCB Antenna 2.4GHz)

TO BE DECIDED /SW Driver Dependency

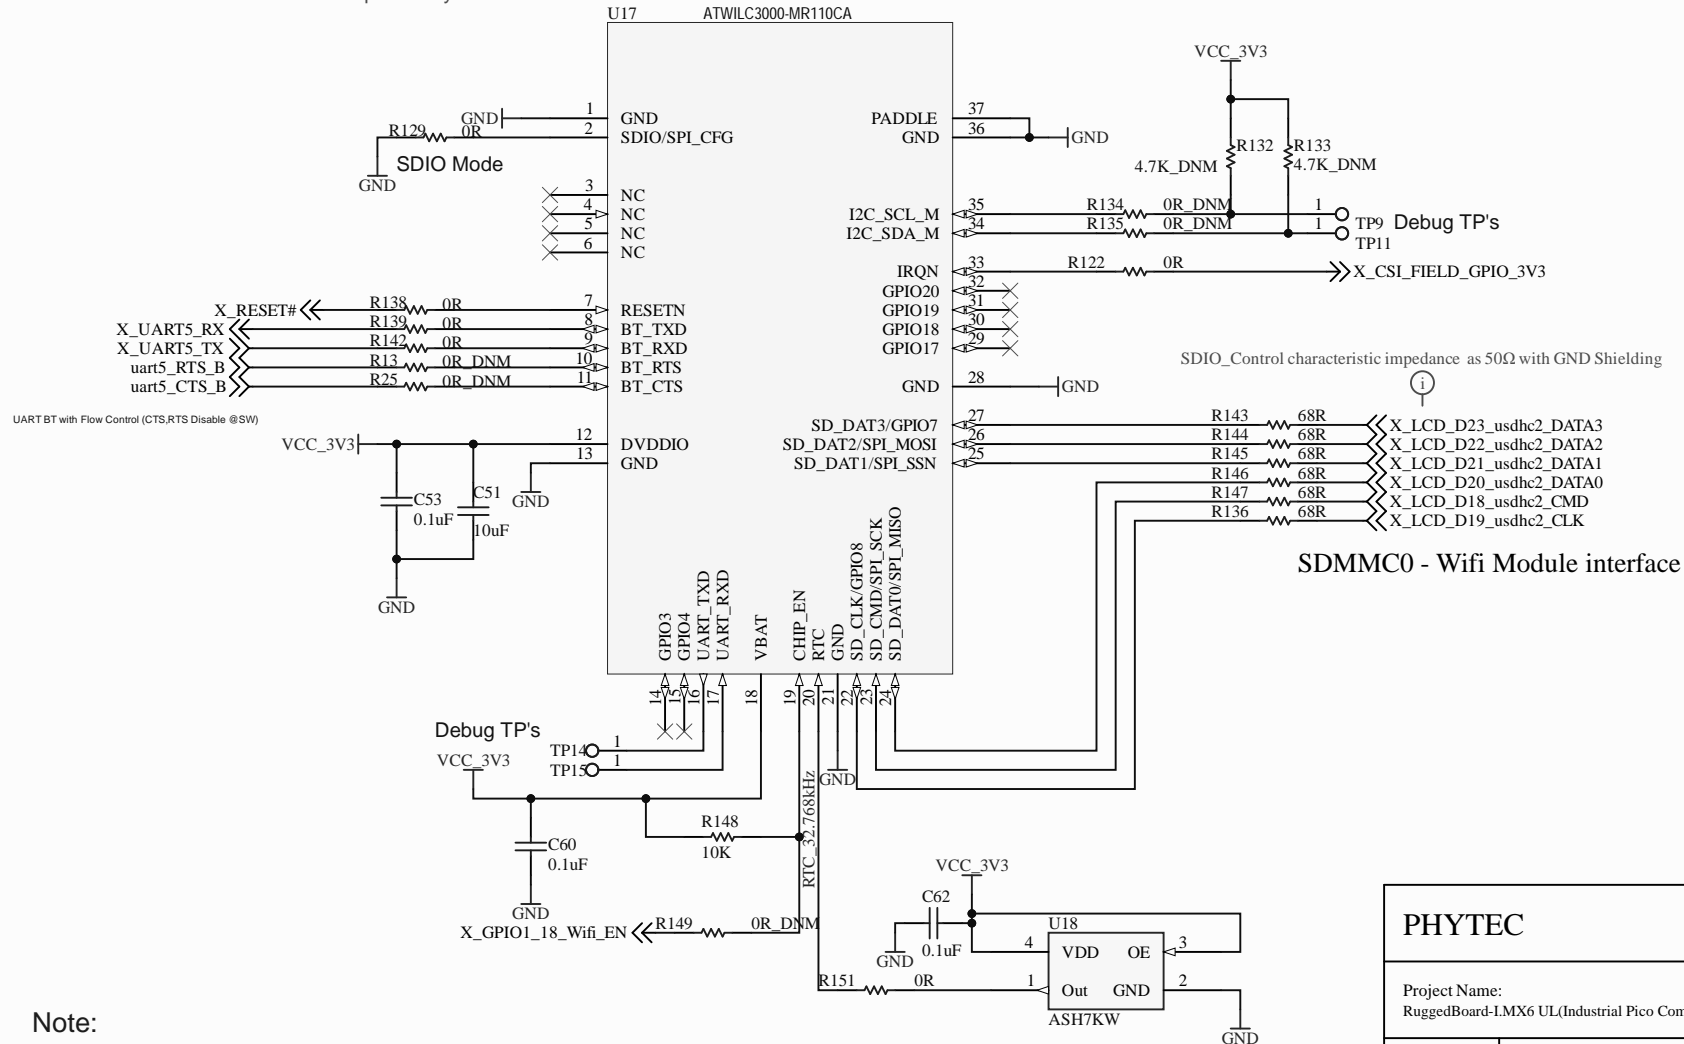


Note:

SDIO, UART * + RSTn /GPIO Interface : For Wifi / BT Module Interface / eMMC NAND Memory (Phy-Module)


PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-IMX6 UL(Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-1P3	Rev:1P3	Sheet: 12 of 15

Expansion HDR (Dual Row 2.54mm Female)

RGB LCD Interface (Without Backlight) reference to "PEB-AV-02" Connector
Note; BACK LIGHT CKT Part of Mapper Board

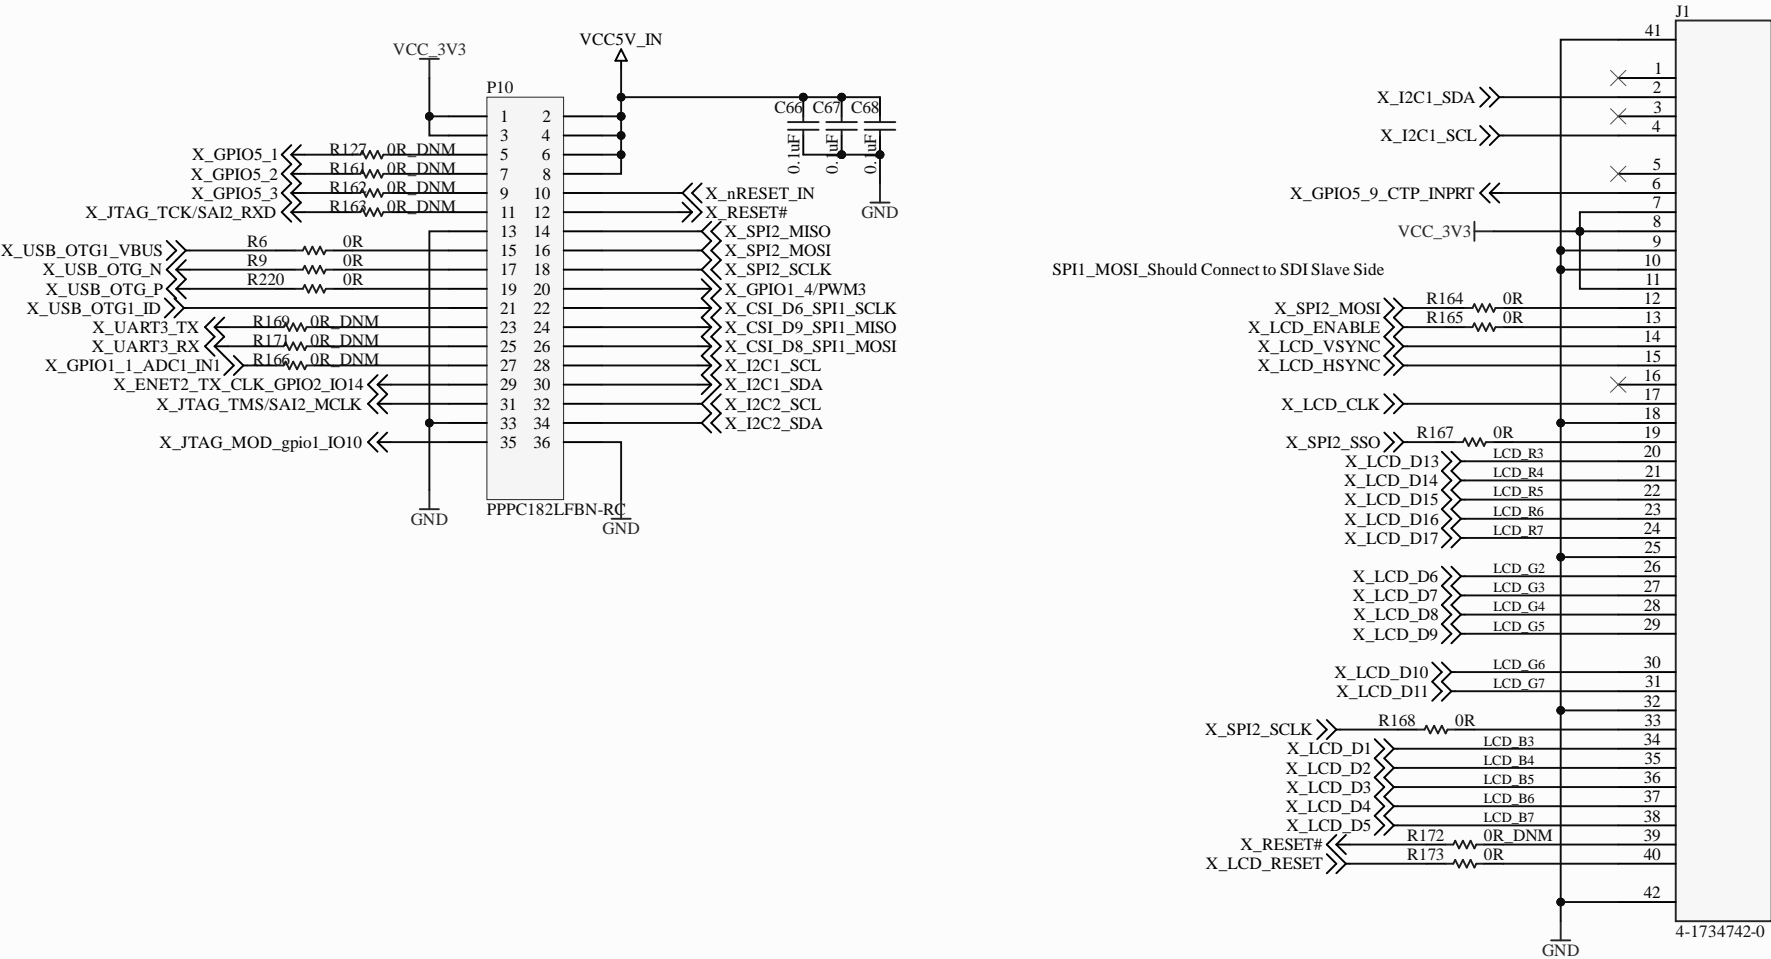


PEB-AV-02 Connector pinouts Compatible

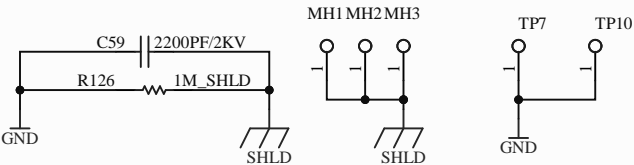

PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-IMX6 UL(Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-1P3	Rev:1P3	Sheet: 13 of 15

Board GND Connect to Shield via RC Board Mounting Holes Connect to Shield Ground TP's for Testing/Debug

Boot Configuration (LCD_D0 to LCD_D23)

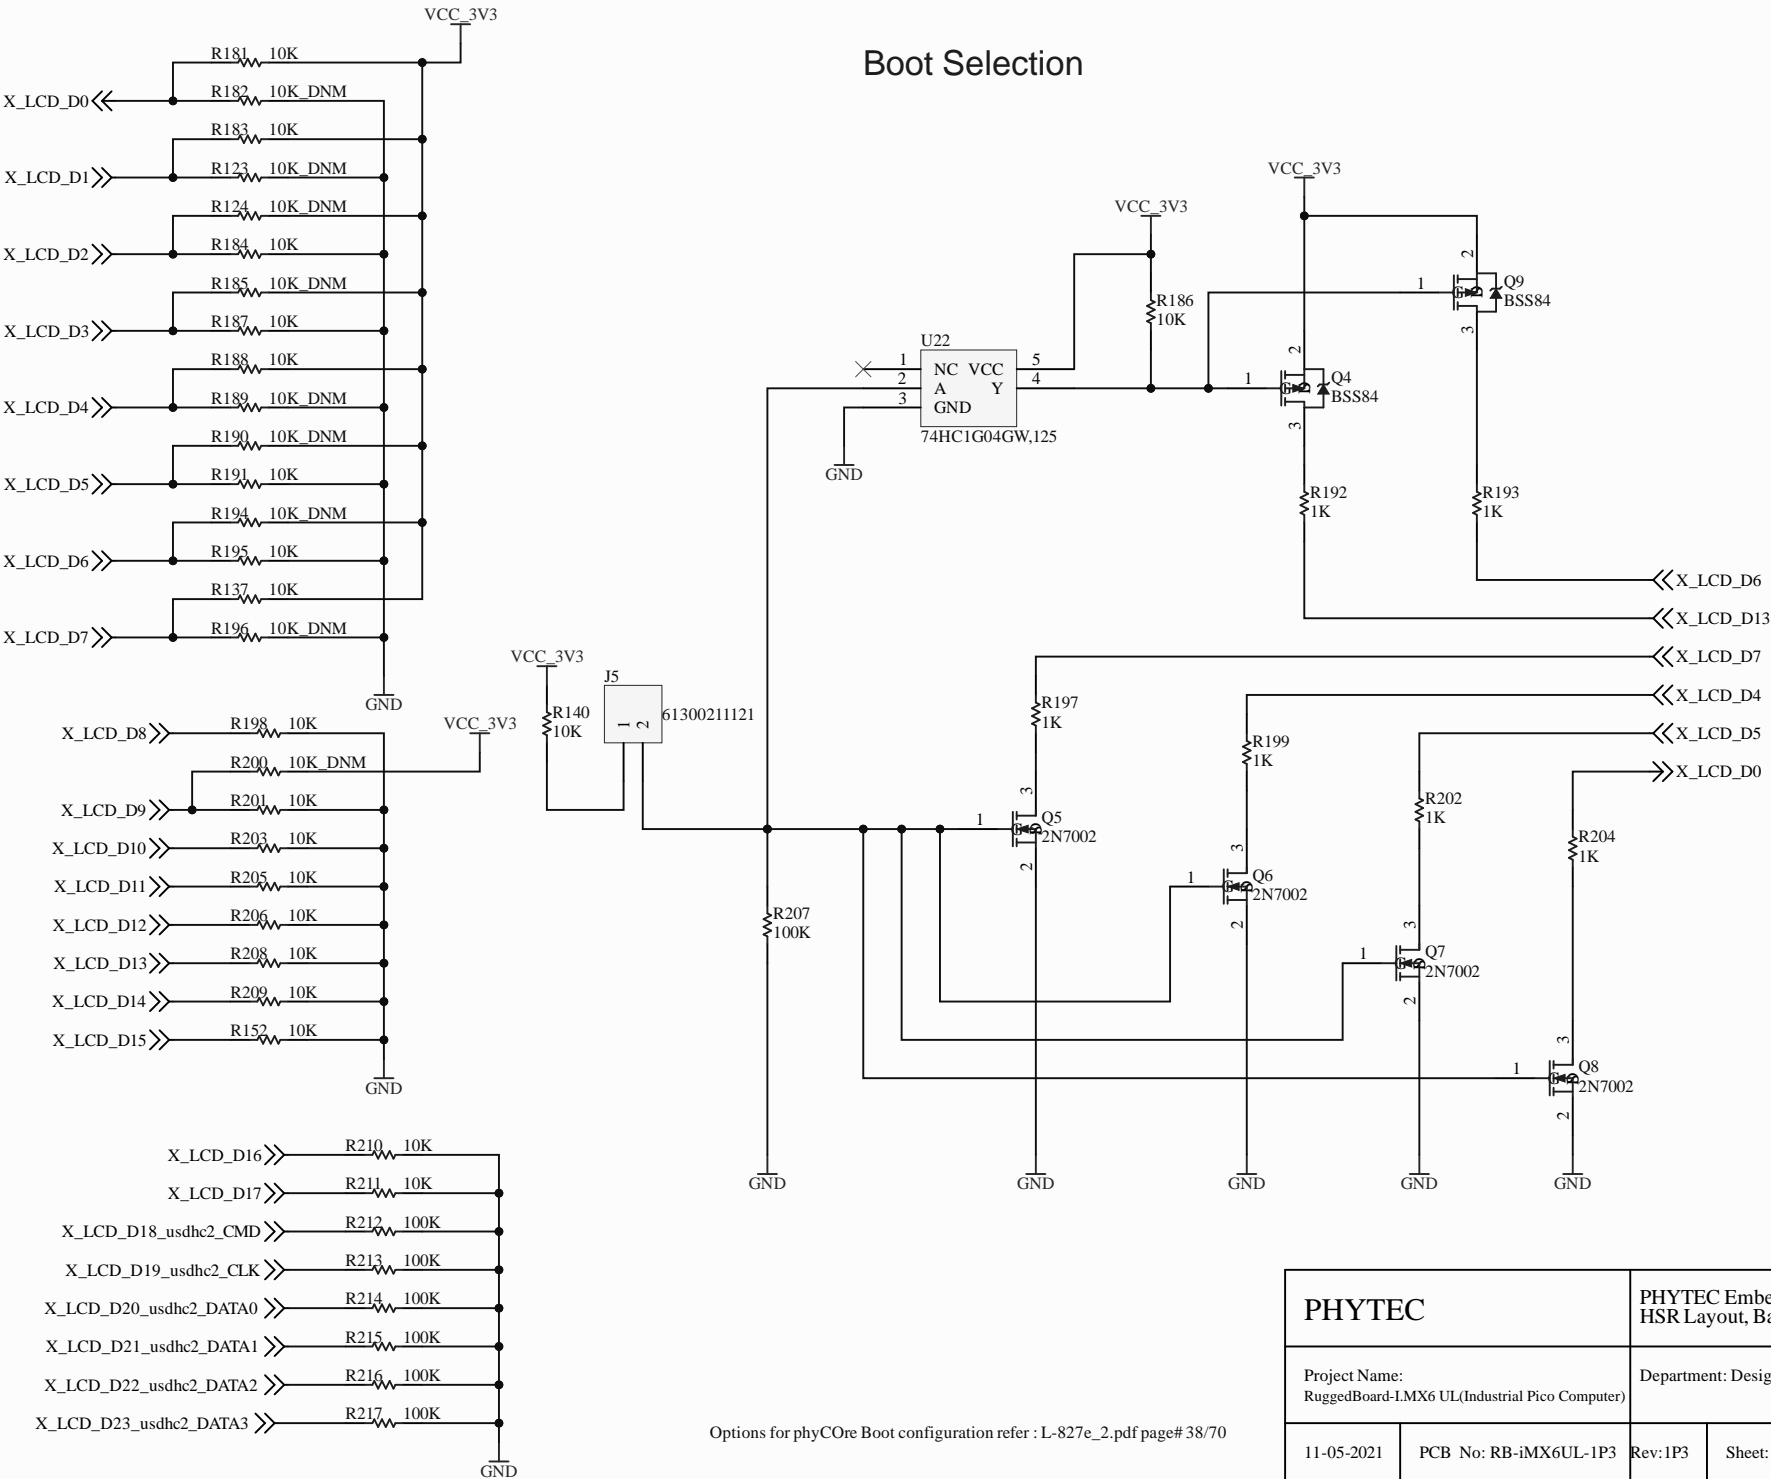

Options for phyC0re Boot configuration refer : L-827e_2.pdf page# 38/70

PHYTEC		PHYTEC Embedded Pvt.Ltd., HSR Layout, Bangalore, India.	
Project Name: RuggedBoard-IMX6 UL(Industrial Pico Computer)		Department: Design and Development	
11-05-2021	PCB No: RB-iMX6UL-1P3	Rev:1P3	Sheet: 14 of 15

	1	2	3	4	
A	No of layer : 4 Layer Impedance Controlled Board				A
	1. Board thickness: 1.6mm				
	2. Surface finish:Enig , Green Mask				
	3. Copper finish thickness: 35 micron				
	4. Minimum line/spacing: As per Fab house Stack up				
	5. Impedance Controlled : Yes				
	6. Board Dimensions : 100 × 72.5mm MAX				
B					B
C					C
D					D