

serper

MOUNTED/ TRAILED TYPE FERTILIZER SPREADER

GünGör

serper eko



- ✓ Serper Eko is our model that combines high pulse sensitivity and ergonomic design with economy
- ✓ For small businesses looking for budget solutions with 800-1000-1200- 1400 liter capacity options


| | Serper eko 800 | Serper eko 1000 | Serper eko 1200 | Serper eko 1400 |
|---|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Additional+ Configuration Hopper | - | 200 | 400 | 400+200 |
| Capacity liters | 800 | 1000 | 1200 | 1400 |
| (A) Width (mm) | 2150 | 2150 | 2150 | 2150 |
| (B) Height (mm) | 1095 | 1205 | 1315 | 1425 |
| (C) Length | 1187 | 1187 | 1187 | 1187 |
| (D) Hopper Length | 1022 | 1022 | 1022 | 1022 |
| (E) Hopper Width | 2030 | 2030 | 2030 | 2030 |
| (F) Canvas Height | 1305 | 1415 | 1525 | 1635 |
| Weight - Canvas (kg) | 410 | 440 | 455 | 485 |
| Hopper Type | Conical - detachable | Conical - detachable | Conical - detachable | Conical - detachable |
| Min Power Requirement (hp) | 50 | 65 | 80 | 95 |
| Min. - Max. Pulse Rate | 5 - 100 kg / da |
| Work Speed Options | 6-8-10-12-15 | 6-8-10-12-15 | 6-8-10-12-15 | 6-8-10-12-15 |
| Mixer Type | Star Type Stainless Steel |
| Agitator Drive Type | Auto tensioned stainless chain |
| Mixer Cycle | 0,198 | 0,198 | 0,198 | 0,198 |
| Hopper angle (degrees - °) | 51 | 51 | 51 | 51 |
| Short/Long Wing Position | 4 - 4 | 4 - 4 | 4 - 4 | 4 - 4 |
| Disposable Fertilizer Types | Crystal - Pyryl-Granule - Pellet |
| Sieve Mesh Size (mm) | 14 x 38 | 14 x 38 | 14 x 38 | 14 x 38 |
| Widths (meters) | 10-12-15-18-24 | 10-12-15-18-24 | 10-12-15-18-24 | 10-12-15-18-24 |
| Operating Speed (km/h) | 6-8-10-12-15 | 6-8-10-12-15 | 6-8-10-12-15 | 6-8-10-12-15 |
| Branda | Standard | Standard | Standard | Standard |
| Switch On / Off | Hydraulics | Hydraulics | Hydraulics | Hydraulics |
| Wing Type | 4 pieces stainless steel |
| Tray Type | StabiFlow - Composite | StabiFlow - Composite | StabiFlow - Composite | StabiFlow - Composite |
| Drop Point | Variable-Adjustable | Variable-Adjustable | Variable-Adjustable | Variable-Adjustable |

GünGör

Clean drop point guaranteed with practical folding hopper design



- ✓ Thanks to its opening/folding hopper design, it is now much easier to clean materials that could negatively affect fertilizer discharge — such as sack ropes, twines, and residues — which tend to accumulate at the bottom of the hopper. This ensures consistent performance under all conditions.
- ✓ The folding hopper design makes both pre-operational maintenance and post-operational cleaning significantly more practical. It allows access to the farthest corners of the **Serper**, preventing any fertilizer residues from remaining.
- ✓ Unlike its equivalents, the **Serper series** (except: Serper Eko) features a hopper opening limiter. This ensures the hopper does not contact the scale sheets, preventing potential damage during opening.
- ✓ With its automatic locking mechanism, the hopper locks securely in the closed position without requiring any additional manual intervention.

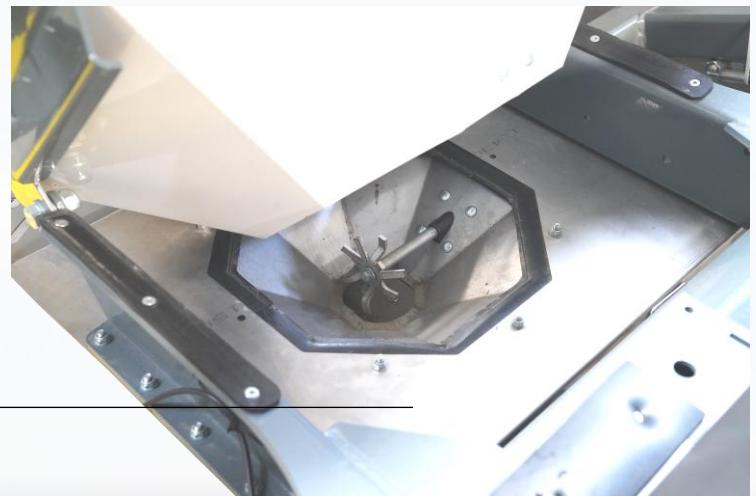

GÜNGÖR



yukay®

TARIM MAKİNALARI PAZARLAMA ve TİCARET A.Ş.

Web : www.gungoragri.com / www.yukay.com.tr

Email : gungoragri@gungoragri.com

Tel : +90 282 427 50 10 / +90 282 427 68 68

Adres : Çavuşköy Mh. Malkara OSB. Rumeli Cd. No: 12 Malkara / TEKİRDAĞ