



How to use the
preprocessing interface?


1.- Select the raw data from the smartwatches

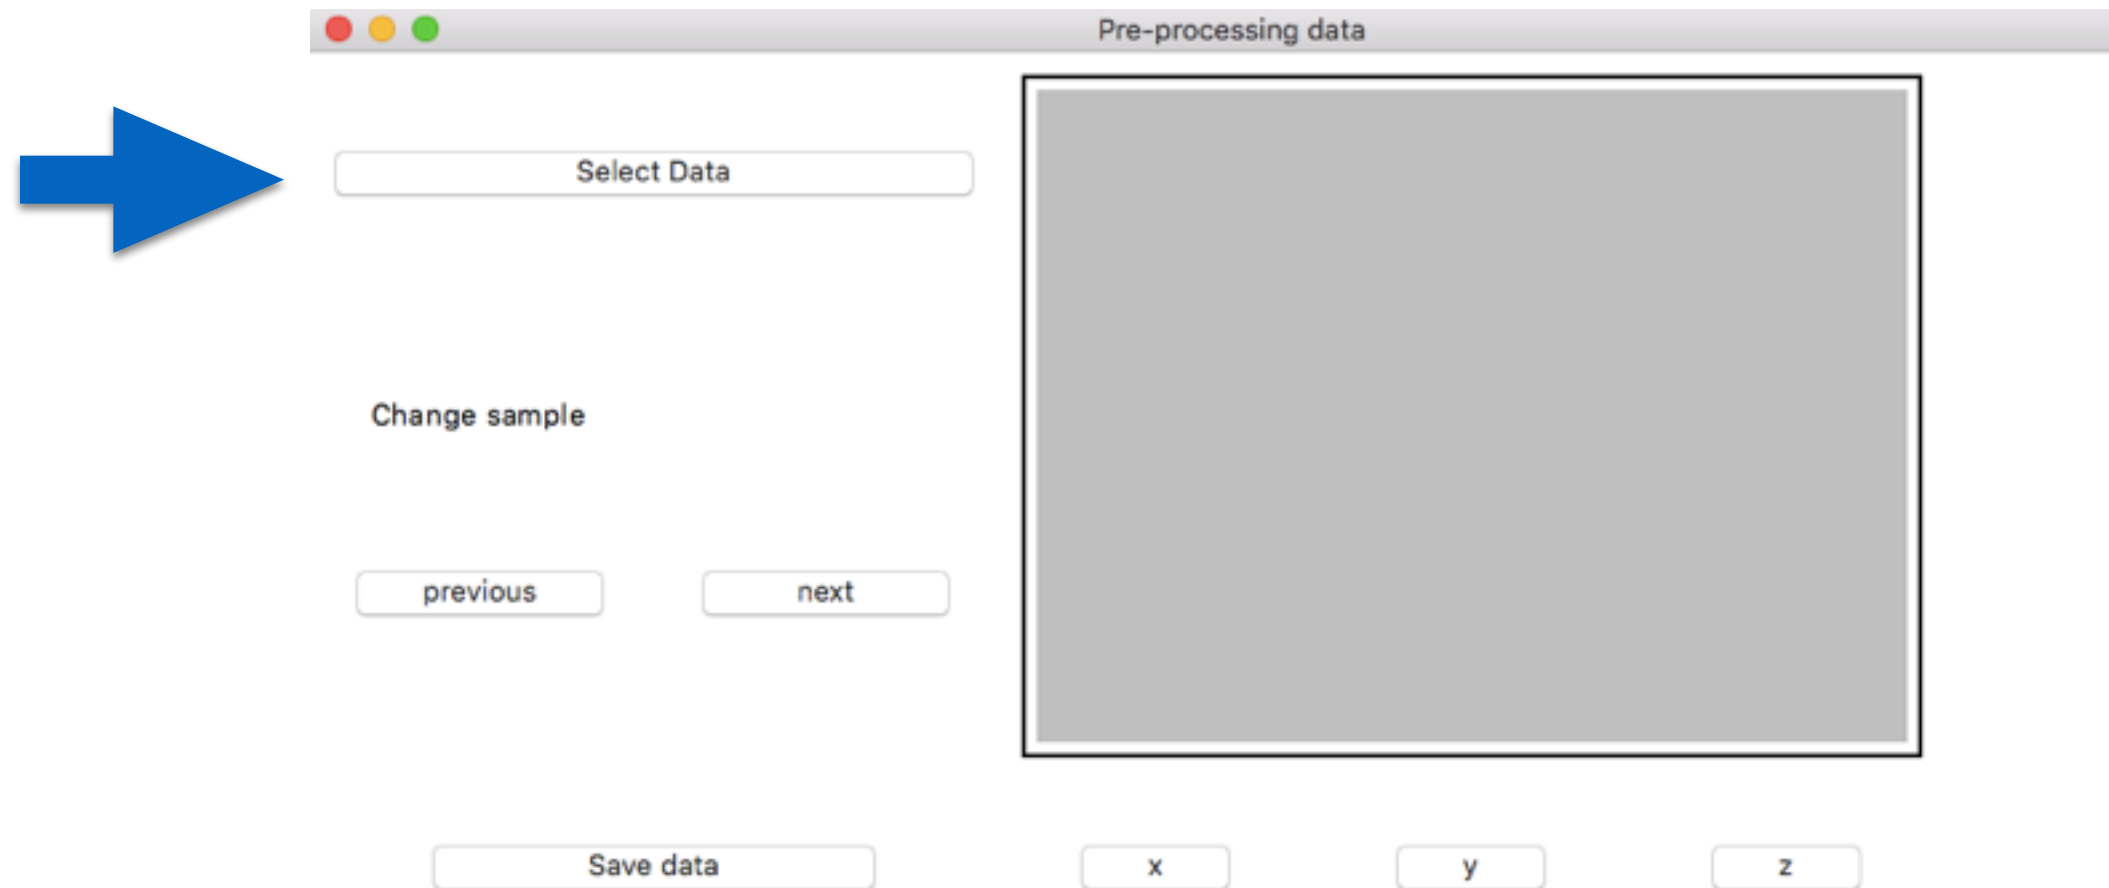


1.- Select the raw data from the smartwatches

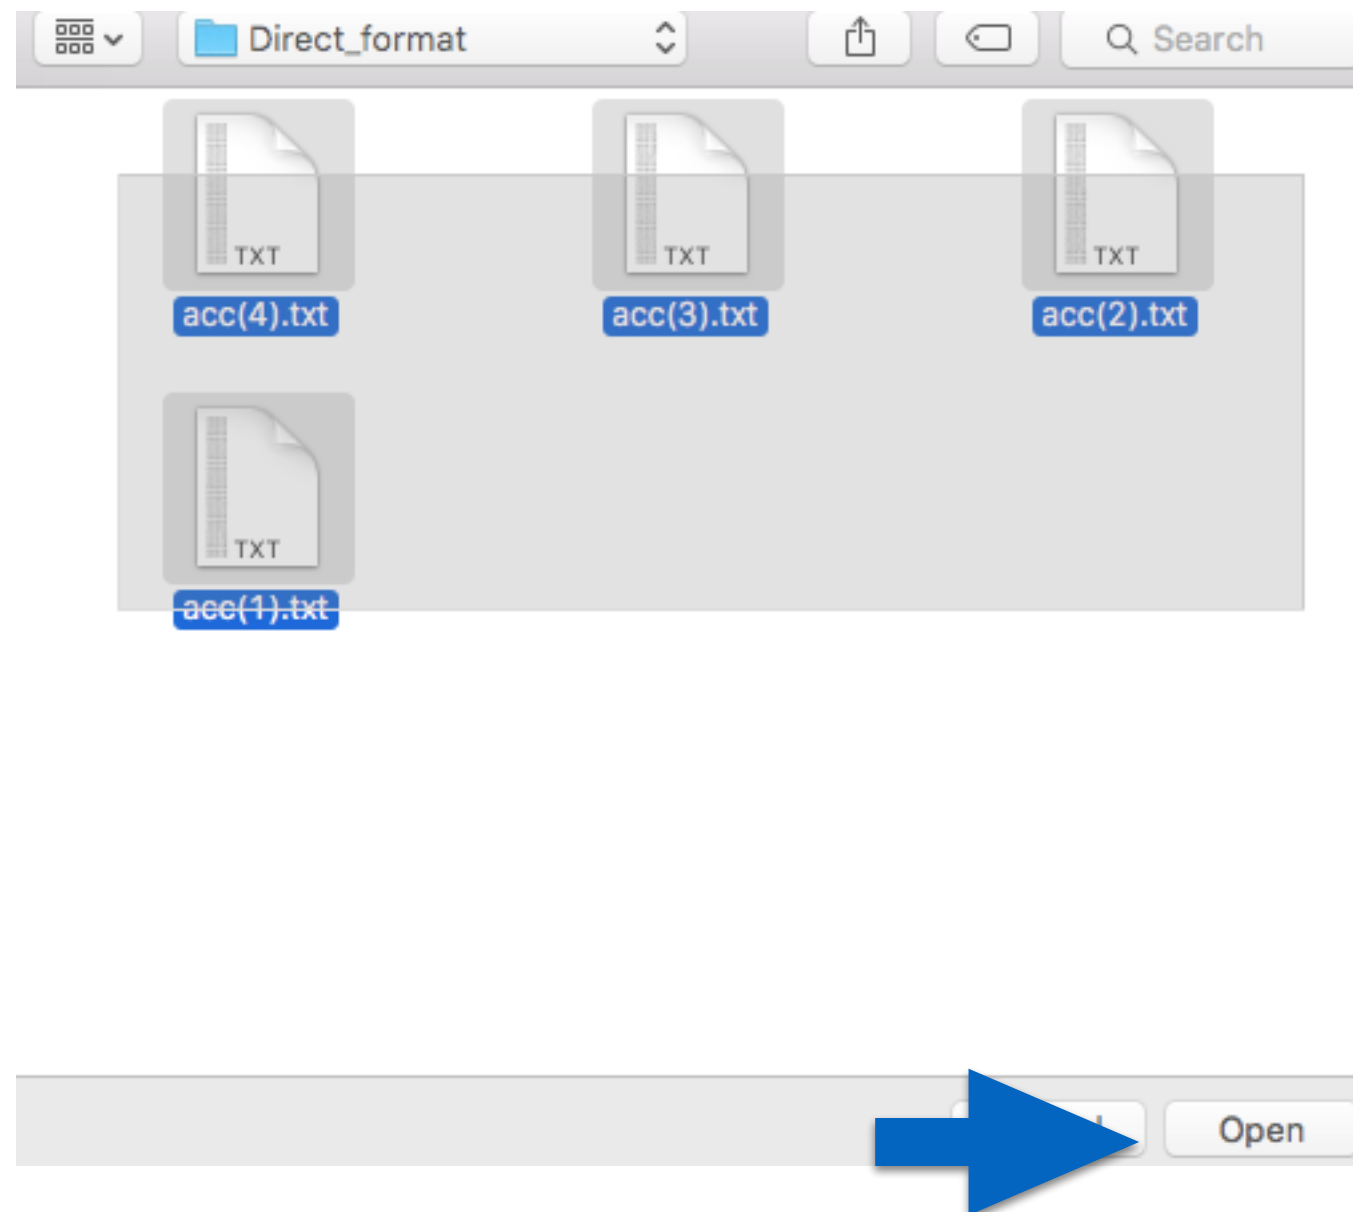


2.- The raw data will be plotted in the figure

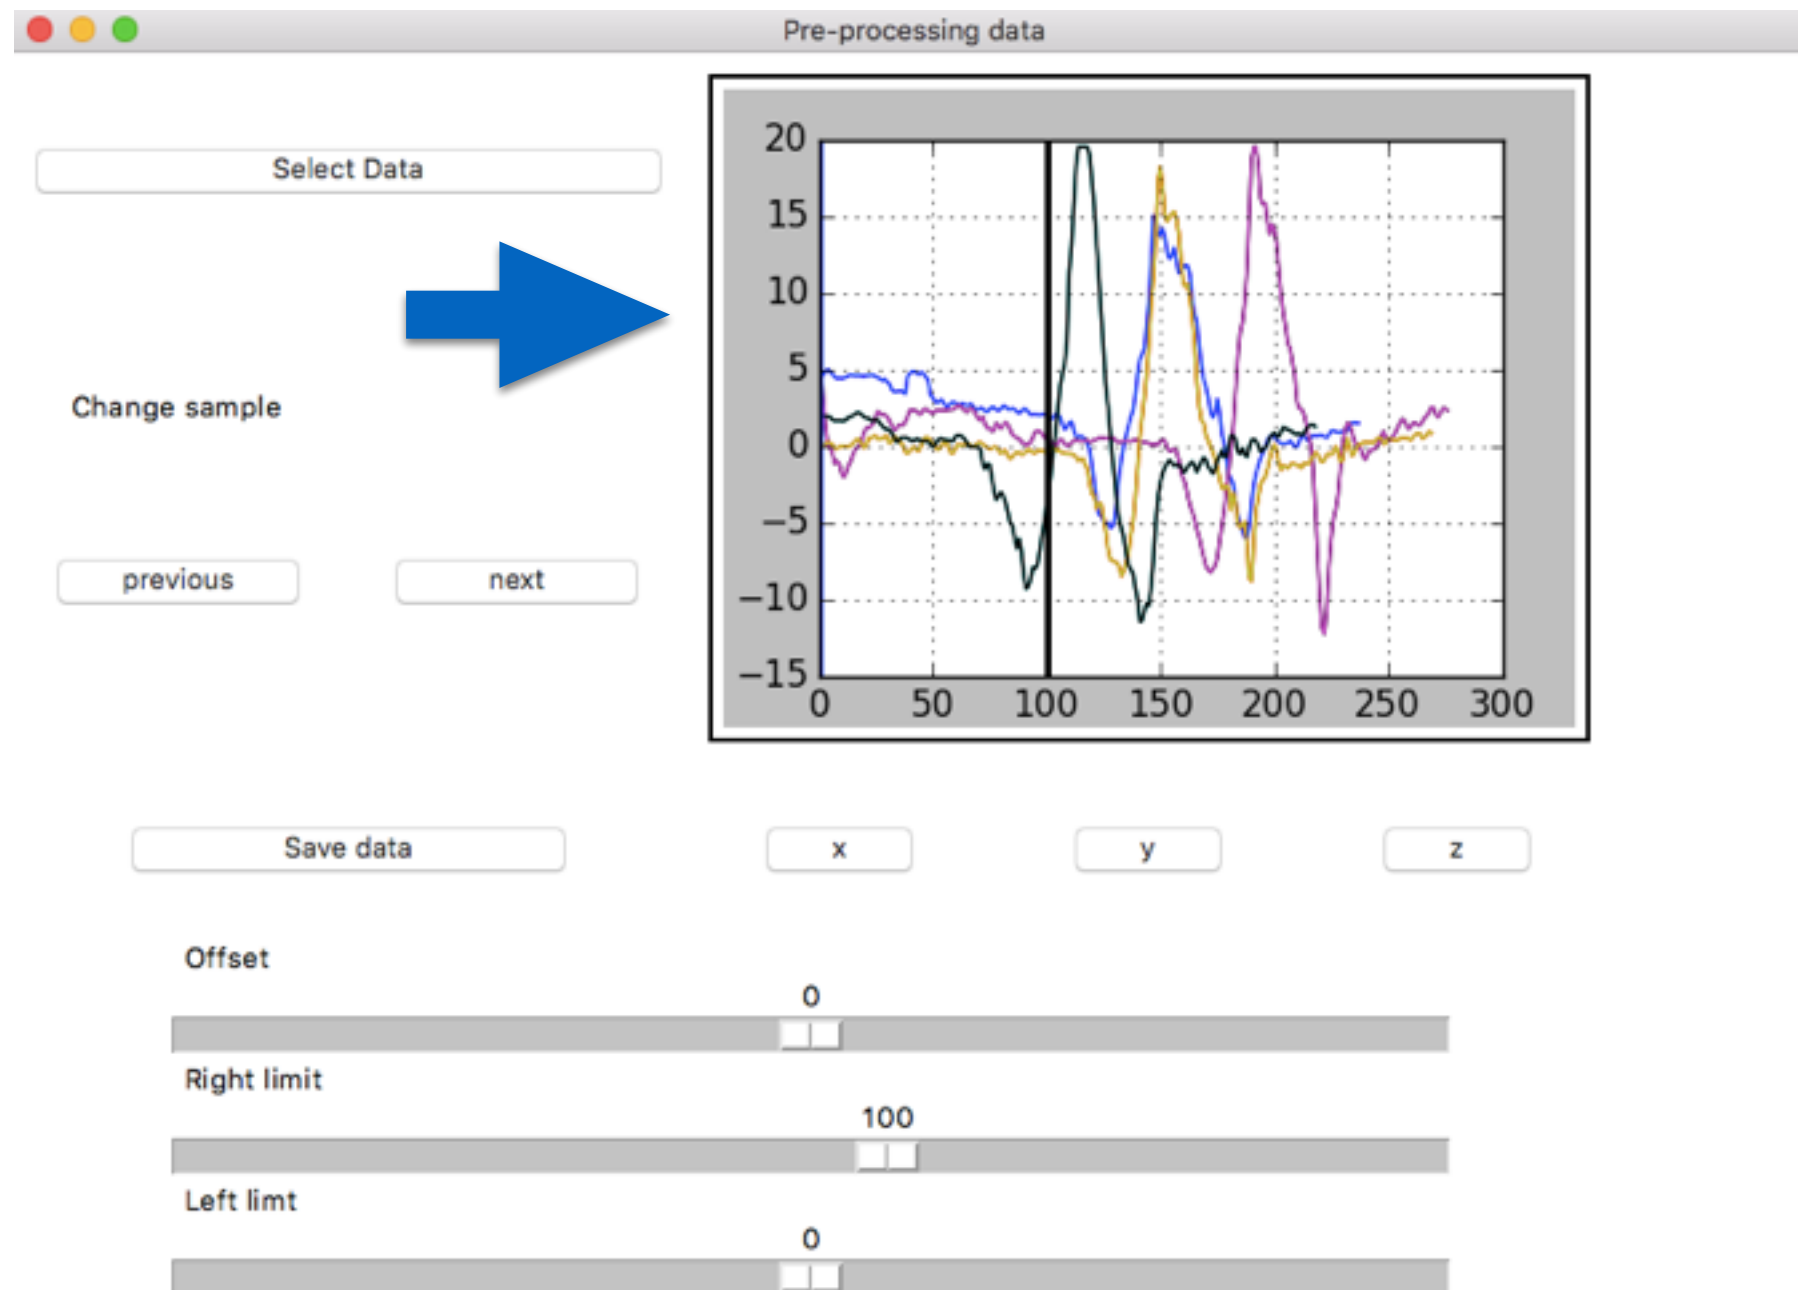


3.- Select the sample to change

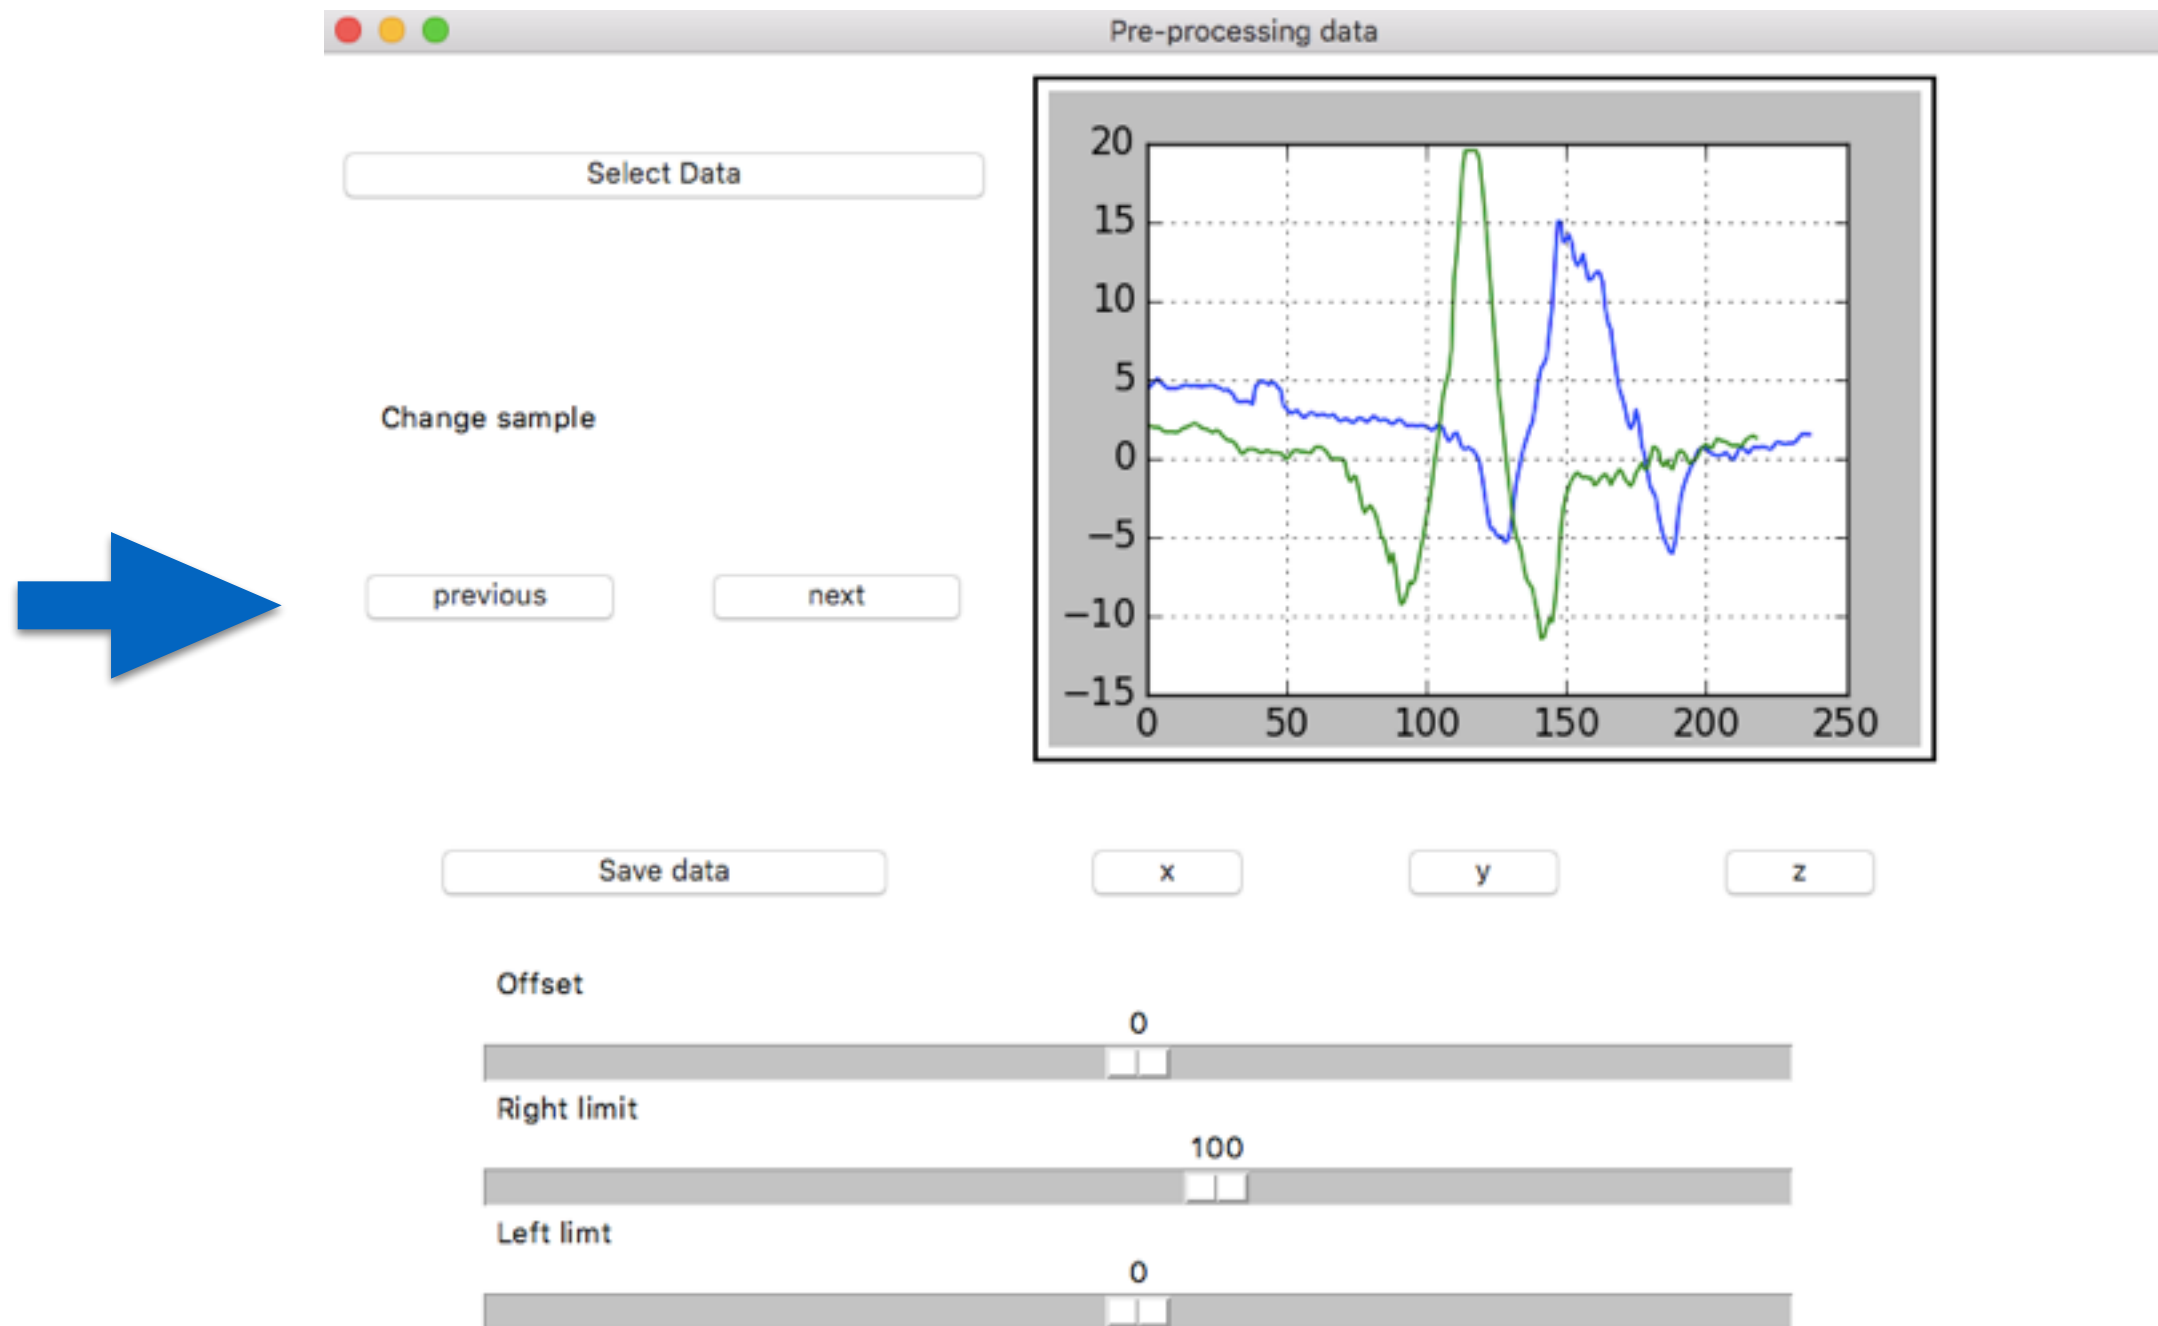


4.- Move the offset of the sample

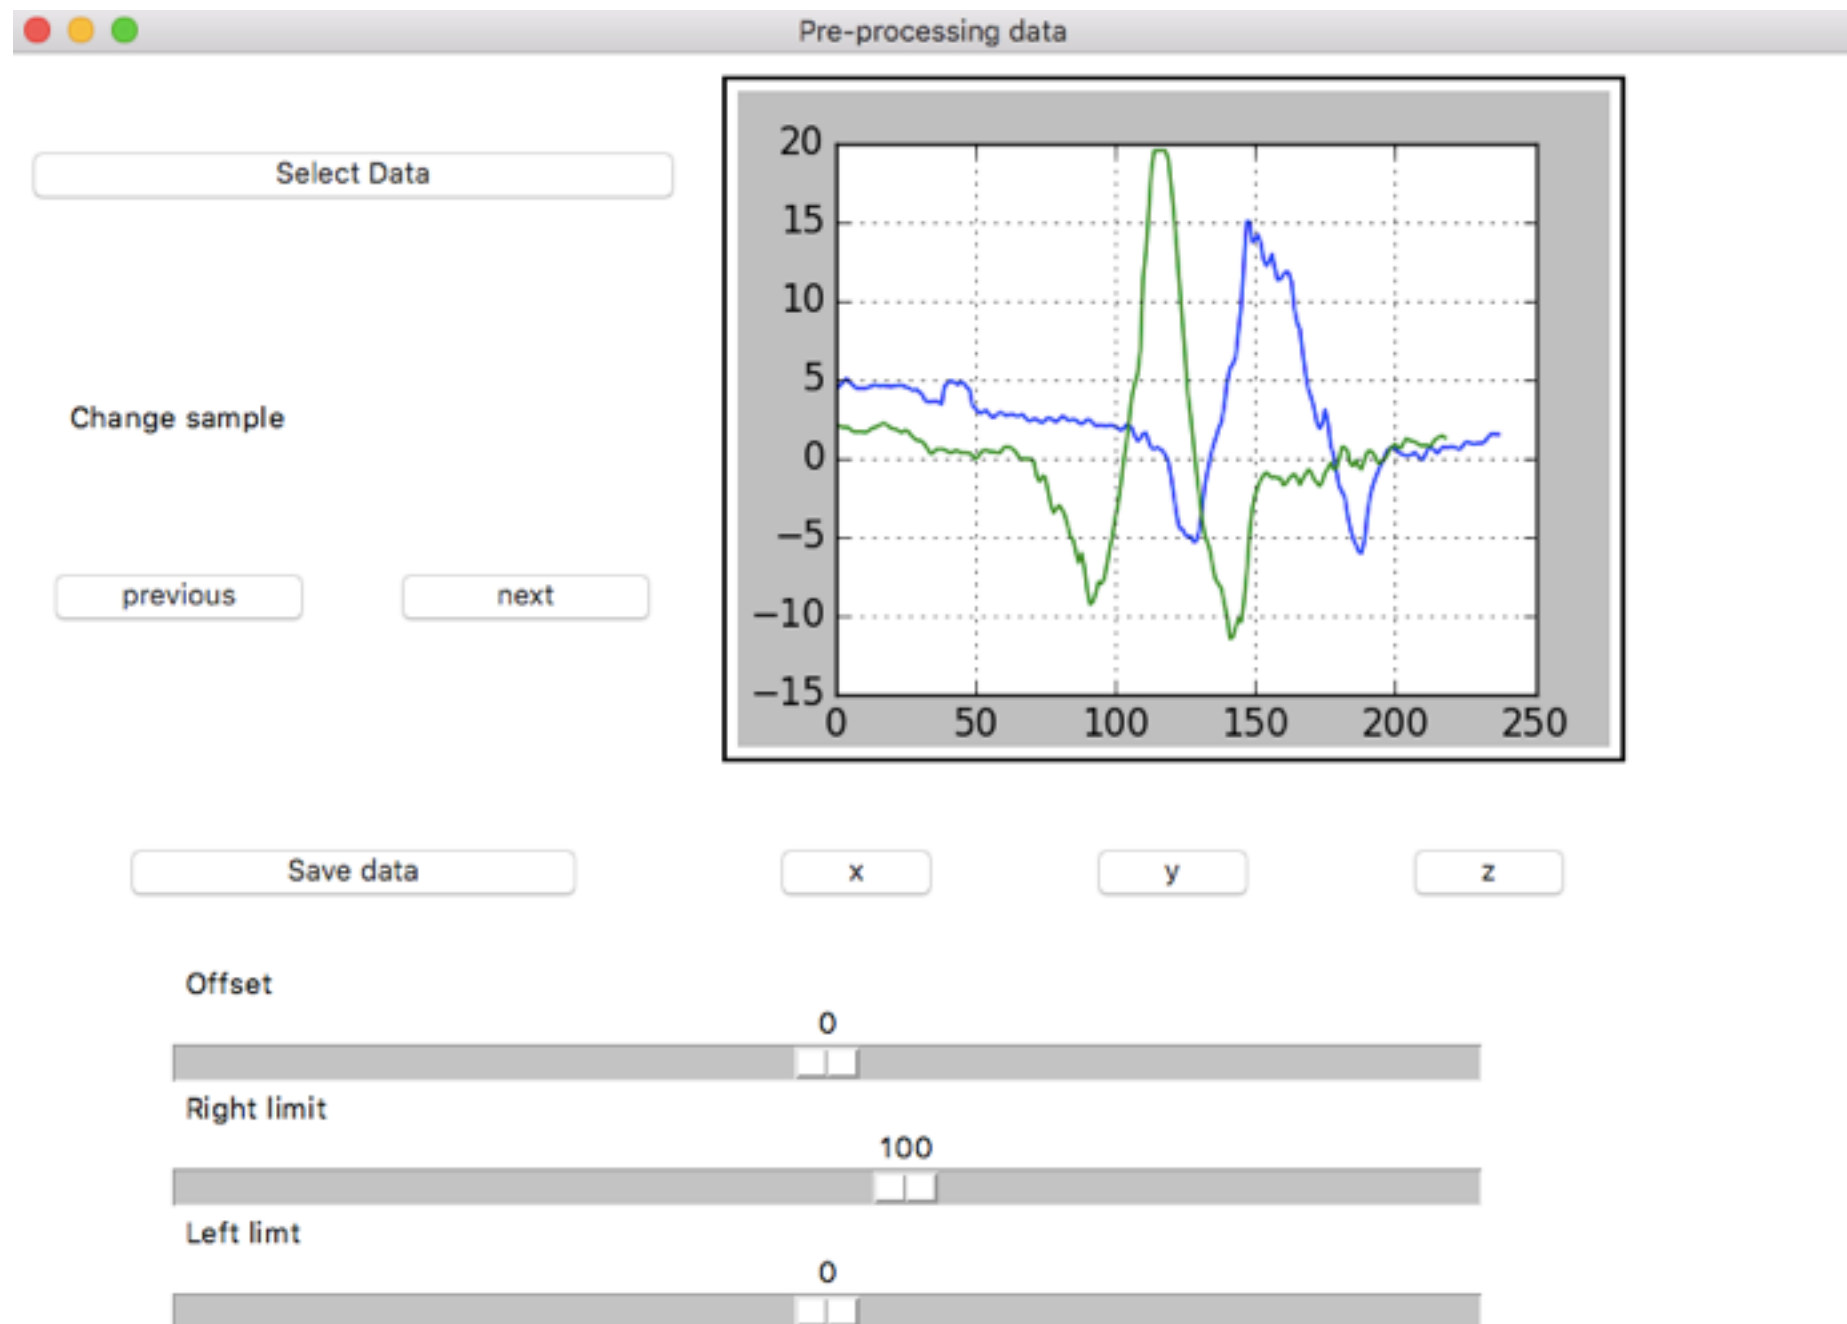


You can see also other axis

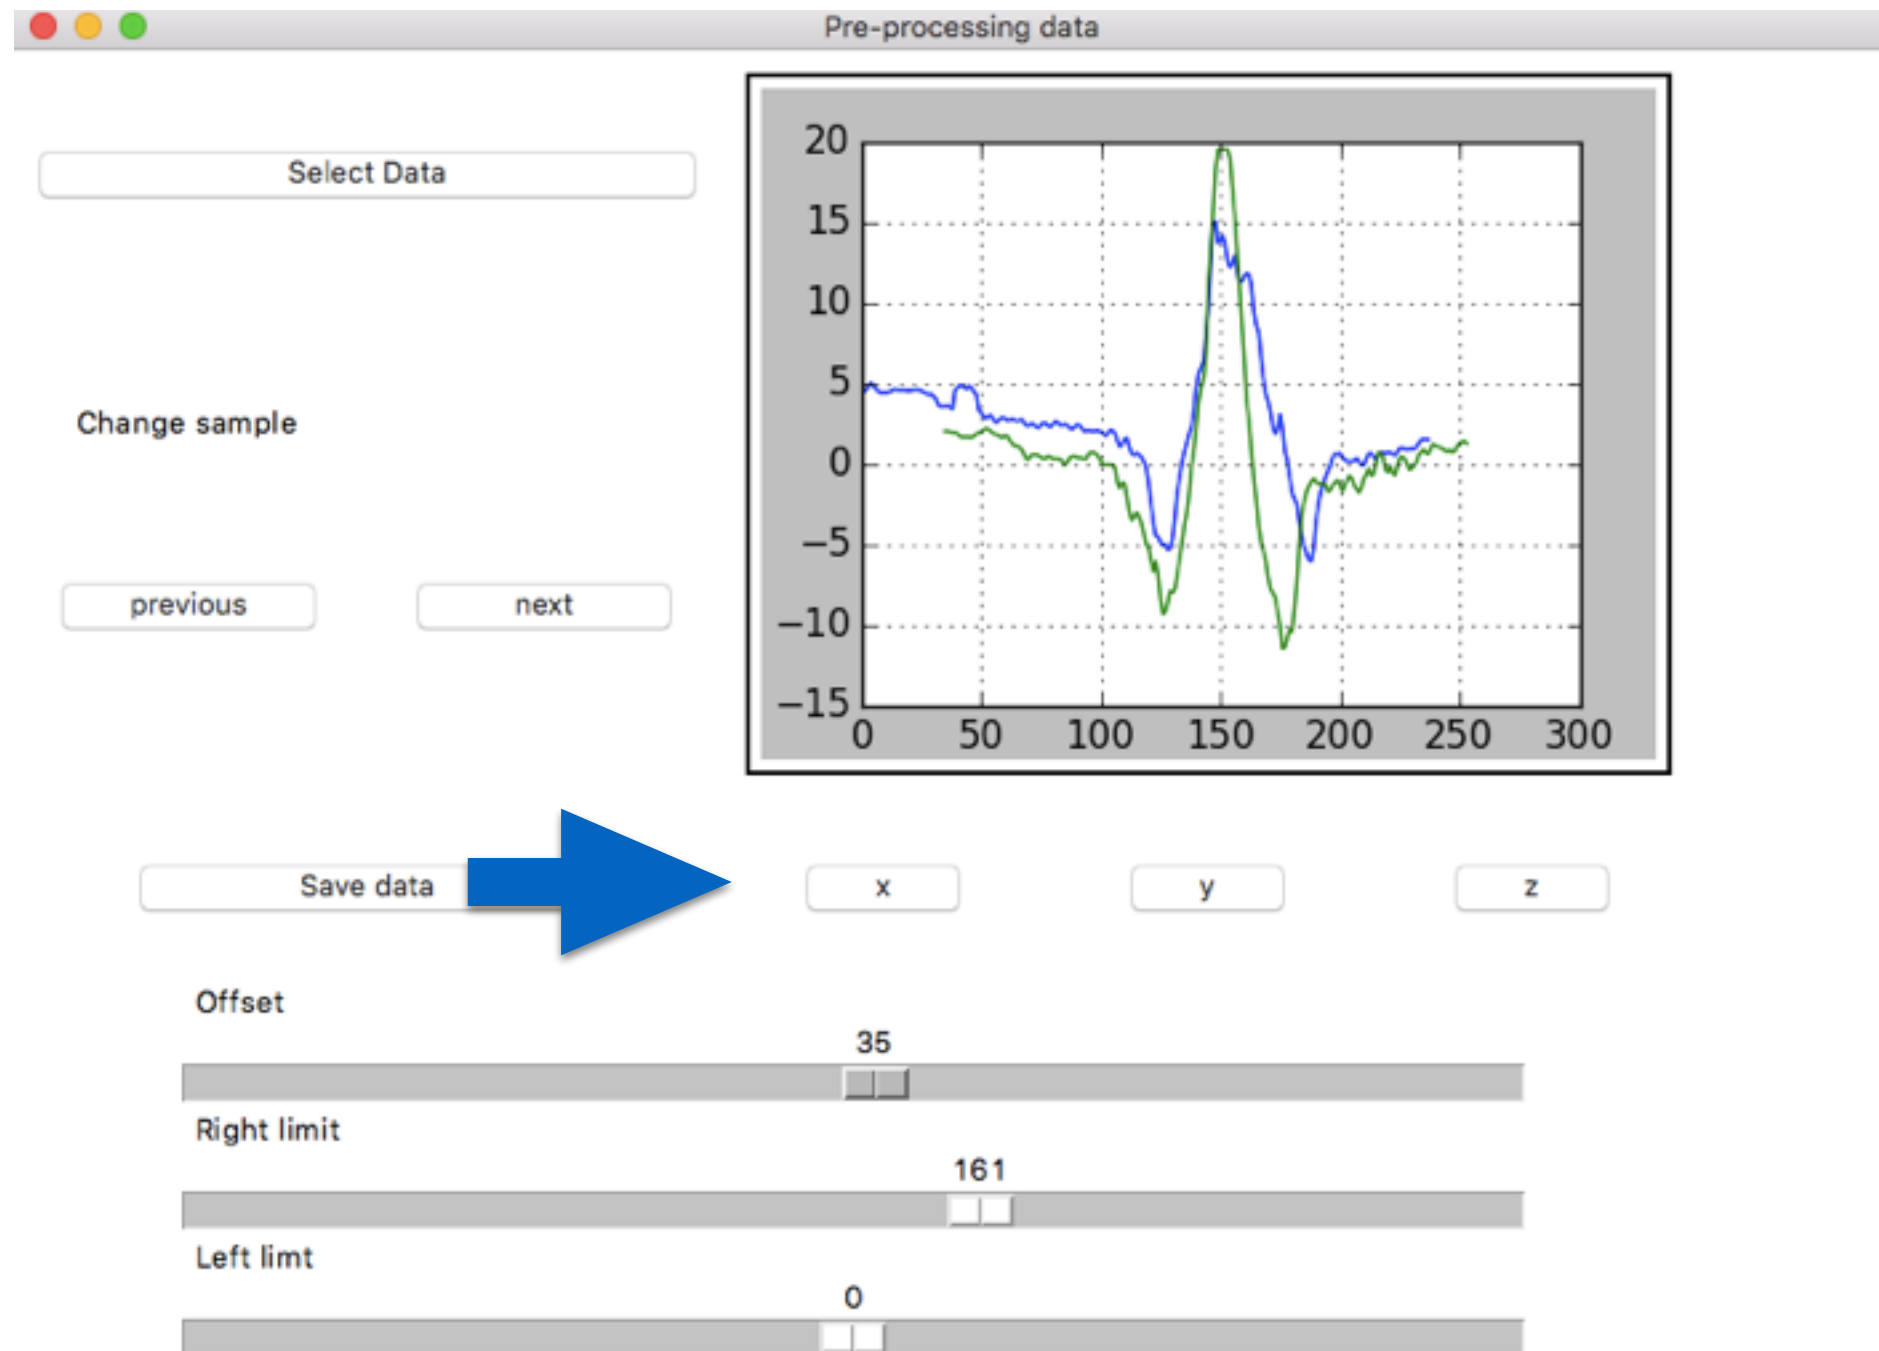

5.- Change the limits

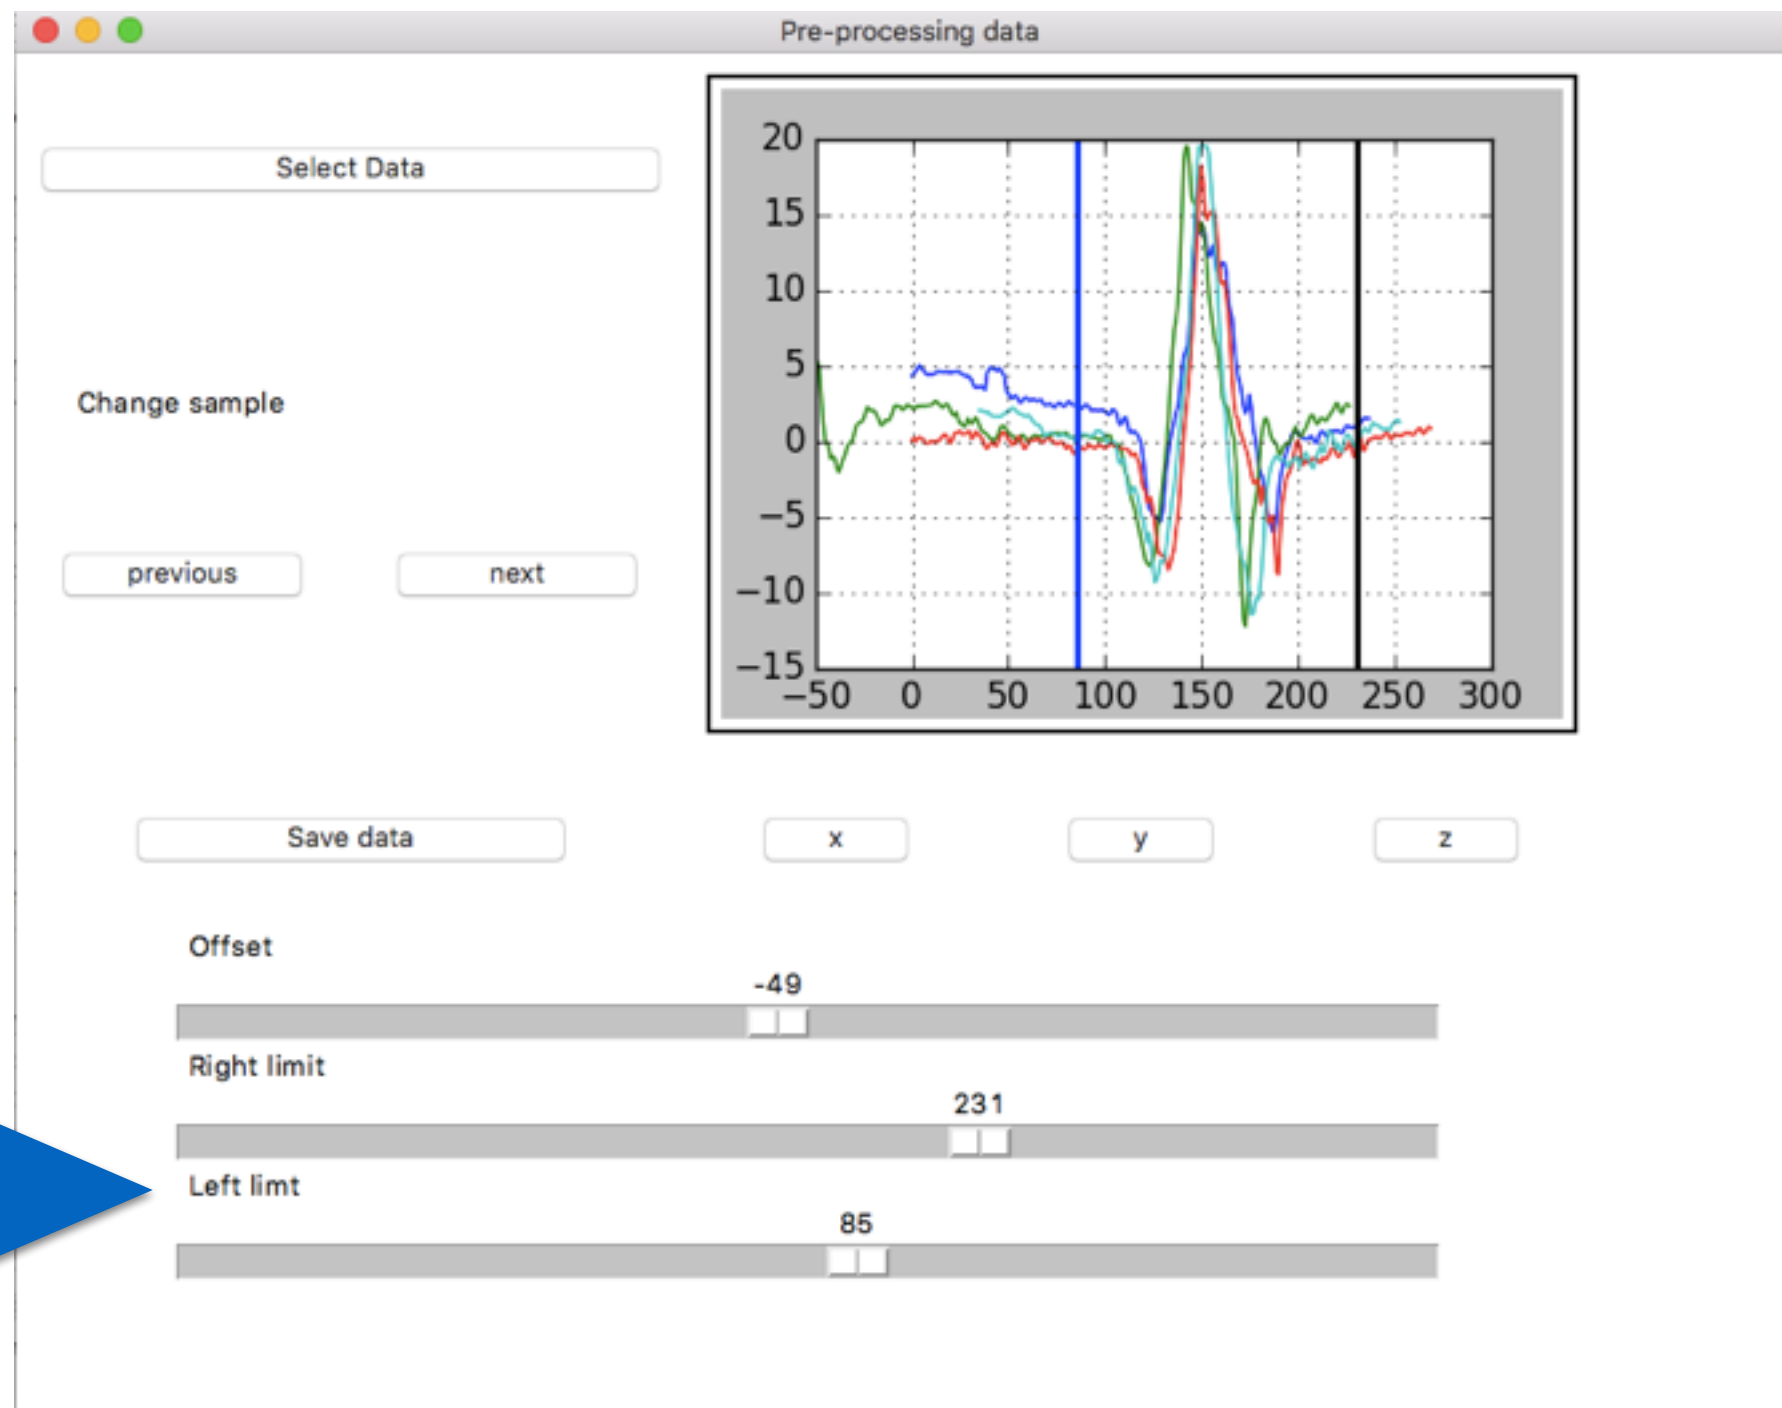

6.- Save the data

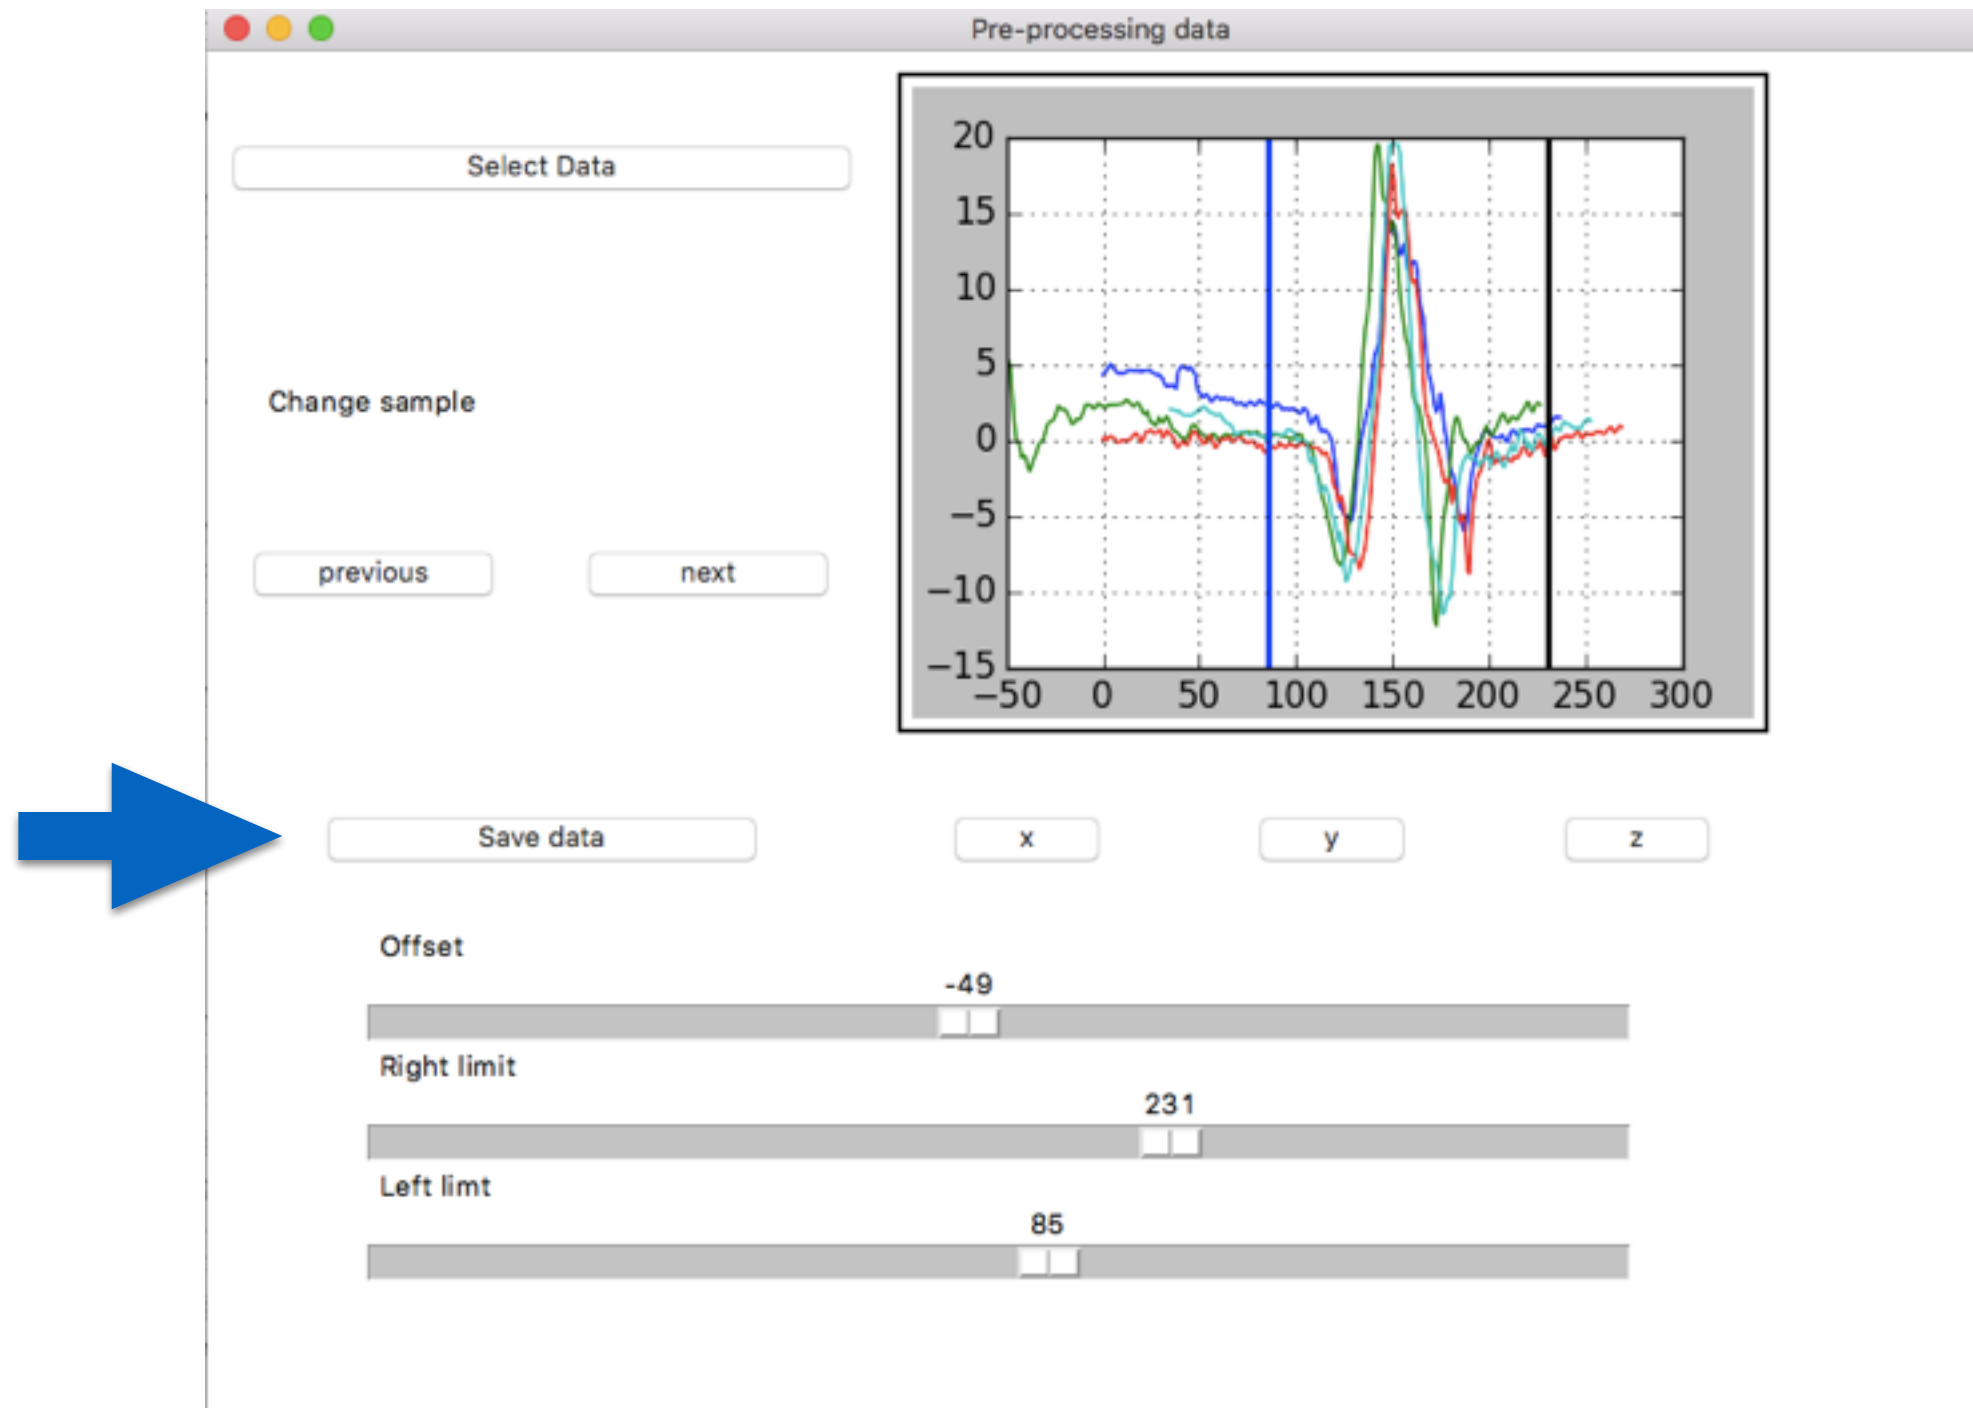

If there are a error is showed in the python shell

