

nfc emulator



Deliver to:
IN


Create

All categories Verified manufacturers Order protection About Alibaba.com Tax exemption Help Center Accio Work Sell or

Module is based on Nordic nRF52832 SoC, the nRF52832 SoC is a powerful, highly flexible ultra-low power multi-protocol SoC ideally suited for Bluetooth® low energy (previously called Bluetooth Smart), ANT and 2.4GHz ultra low-power wireless applications.

Customization is available


- ✓ Customize Product
- ✓ OEM /ODM
- ✓ Antenna Tune

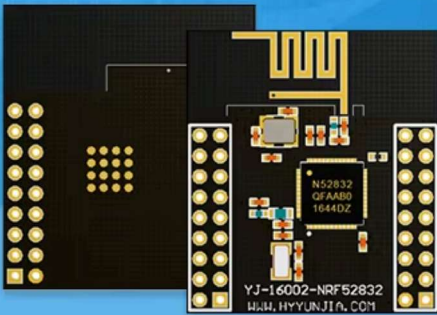

YJ-16002-NRF52832
HJM, HYYUNJIA, COM

PRODUCT SIZE

Different sizes can be customized

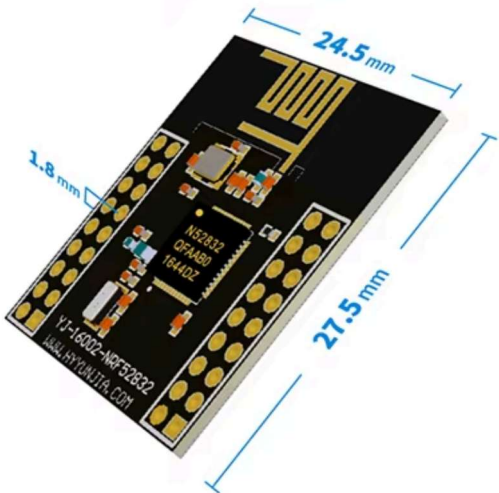

Features			
Module number	Holyiot-16002-nRF52832	Chipset	Nordic nRF52832
Chipset	Nordic nRF52832	Module size	27.5*24.5*1.8mm
Reprogrammable	Yes(SWD port)	Power supply	1.7~3.6V
Support"nRF connect"	for reprogrammable / Debug	Distance	0~100m
On-air data rate	2 Mbps / 1 Mbps / 250 Kbps	Work temperture	-40~85°C
Microprocessor	64 MHz Arm Cortex-M4	GPIOs	32
Memory	512/256 KB Flash + 64/32 KB RAM	ANT Type	PCB Antenna
Support system	MAC / Linux / Windows / Android / IOS	TX power	-20dBm ~ +4dBm
Memory	512/256 KB Flash + 64/32 KB RAM	Manufacturer	ODM / OEM
Security	128-bit AES CCM, ECB, AAR / Arm TrustZone, Arm CryptoCell-312, SPU, KMU, ACL		
Applications	IOT / Games / Medical / Wearable / Fitness / Keyboard / Mouse		
Peripheral	SPI / TWI / I ² S / UART / PDM / QDEC / ADC / timer / counter / real-time counter / GPIOE / Temp sensor / WDT / PPI / RNG / ADC		

PRODUCT FEATURES

Different sizes can be customized



nfc emulator



Deliver to:
IN

Create

All categories

Verified manufacturers

Order protection


About Alibaba.com

Tax exemption




Help Center

Accio Work


Sell or

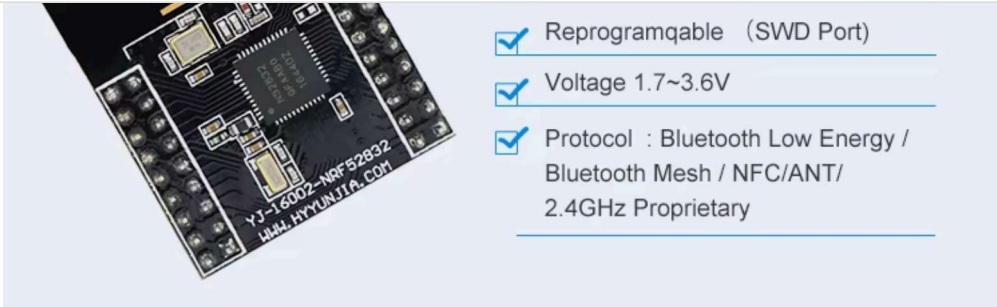

PRODUCT DISPLAY

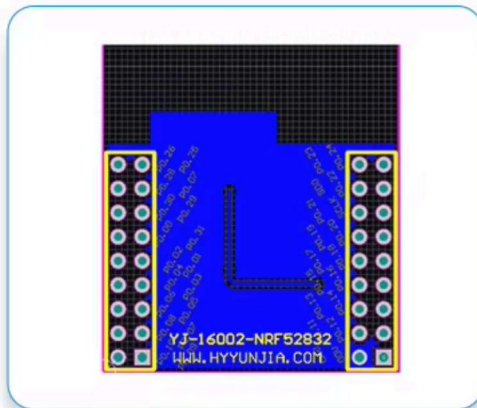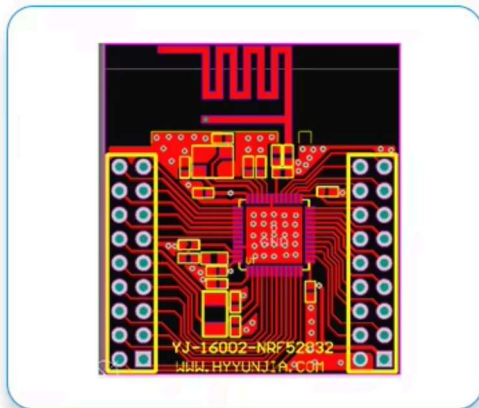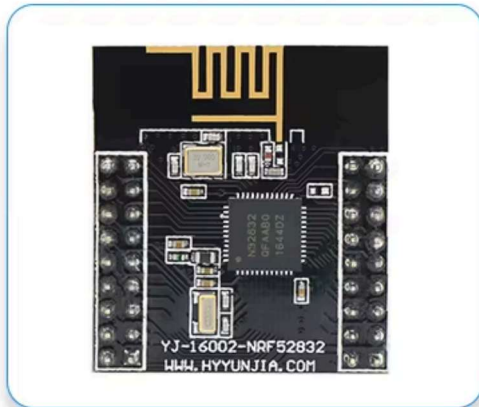

PIN DEFINE

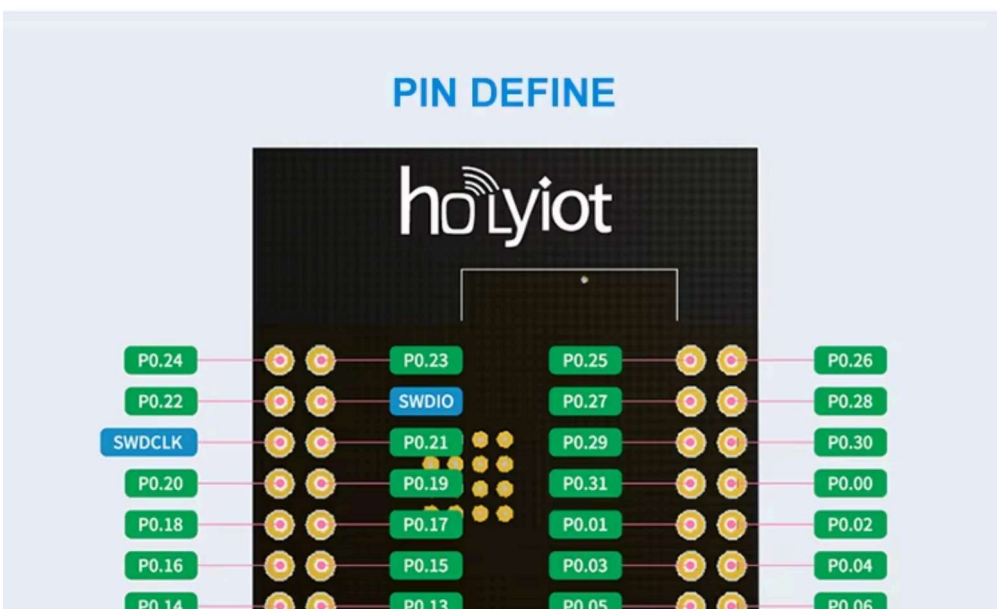

nfc emulator



Deliver to:
IN

Create

All categories

Verified manufacturers

Order protection

About Alibaba.com


Tax exemption

Help Center

Accio Work

Sell or


SCHEMATIC

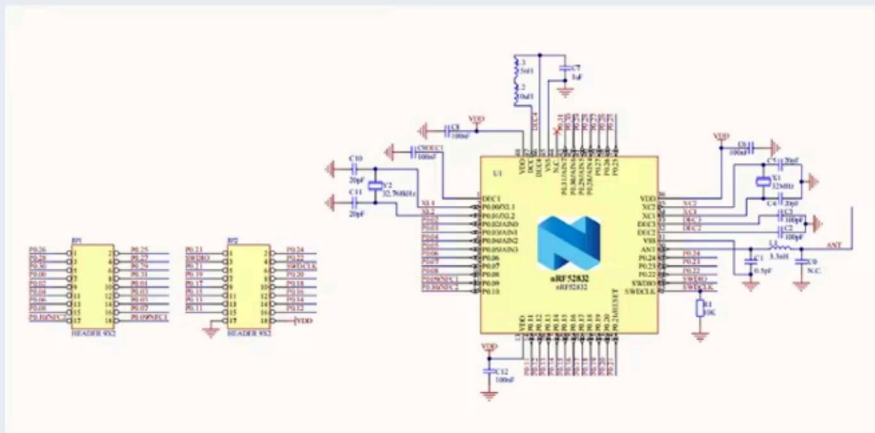

MOUNTING OUR BOARD ON THE HOST PCBA

We suggest that you mount our RF board(Holyiot-16002-nRF52832) on the board like that:

- 1.For the best Bluetooth performance, the antenna of the area need to extend about several mm without ground under the antenna of the edge of the host PCB.
2. The second choice is that place our board at the corner of host PCB, the antenna of board need to extend several mm outside of the Ground plane of the host PCB.

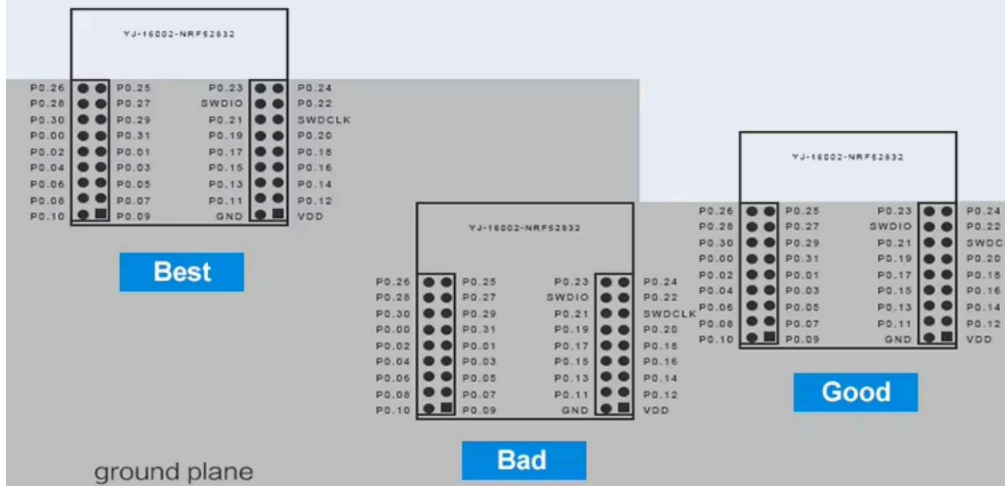

APPLICATION

