



RMII Board-to-Board Connector


R/A male pins

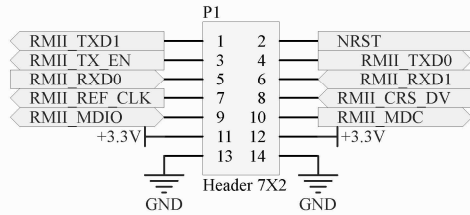

Ethernet Transceiver (PHY layer)

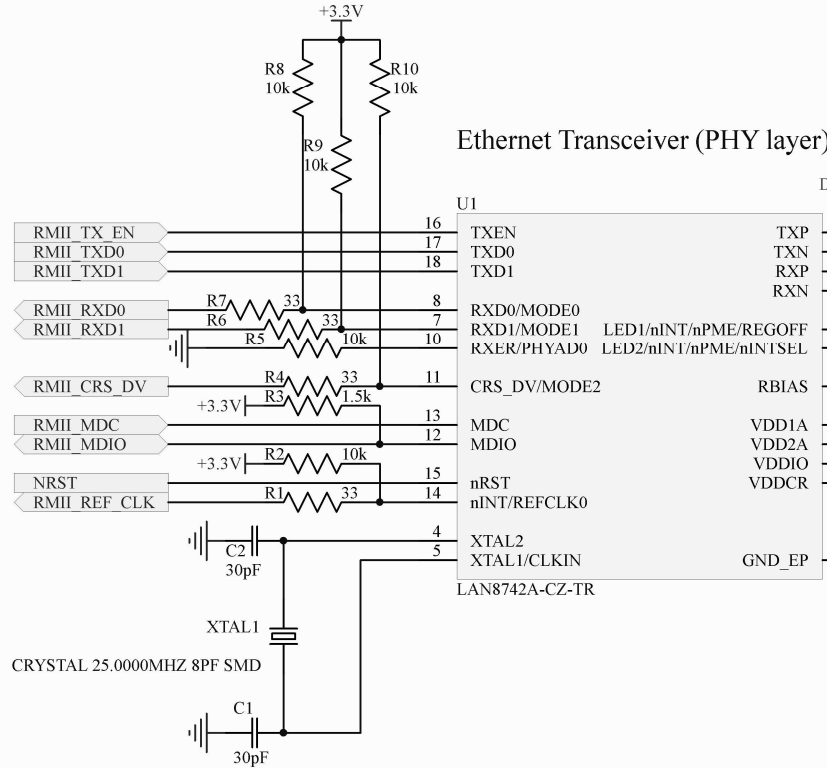


Diff Pair EMI Filter

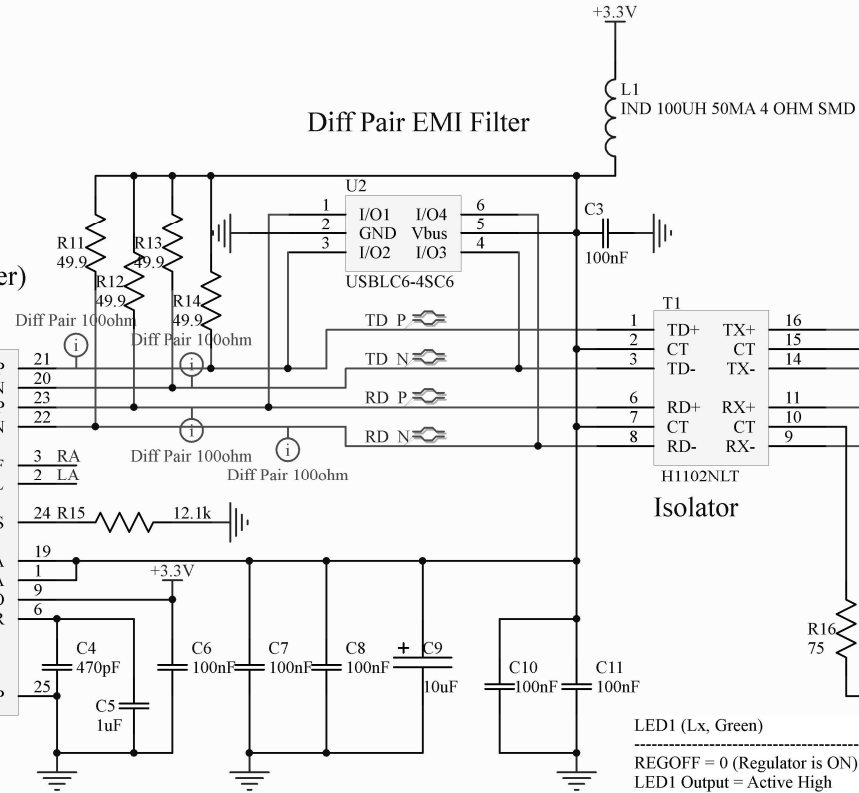

RJ45 Connector

LEDs: Left = Green, Right = Yellow
J?

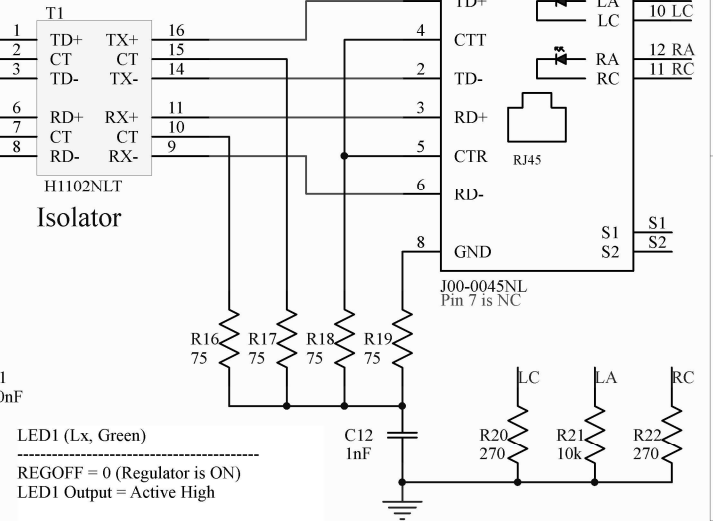

LED Resistors and Pull-Down

LED1 (Lx, Green)

REGOFF = 0 (Regulator is ON)
LED1 Output = Active High

No pull resistor for LED1

LED2 (Rx, Yellow)

nINTSELF = 0
LED Output = Active High

External pull-down resistor for LED2

Title		
Size	Number	Revision
A4		
Date:	2019-12-30	Sheet of
File:	C:\Users\ARMII_Dongle.SchDoc	Drawn By: