

SPECIFICATIONS  
PERFORMANCE

Electical Rating:AC/DC 50V 0.5A

Insulation Resistance: 500MΩ

Contact Resistance:50mΩ Max

Withstang Volt:150V AC/minute


Opratng Temperature:-40°to+105°

Material

Contact:Phosphor Bronze Gold-Plated

Housing:LCP

Max.Processing Temp:230°C for30-60 seconds  
(260°C for 10 seconds)

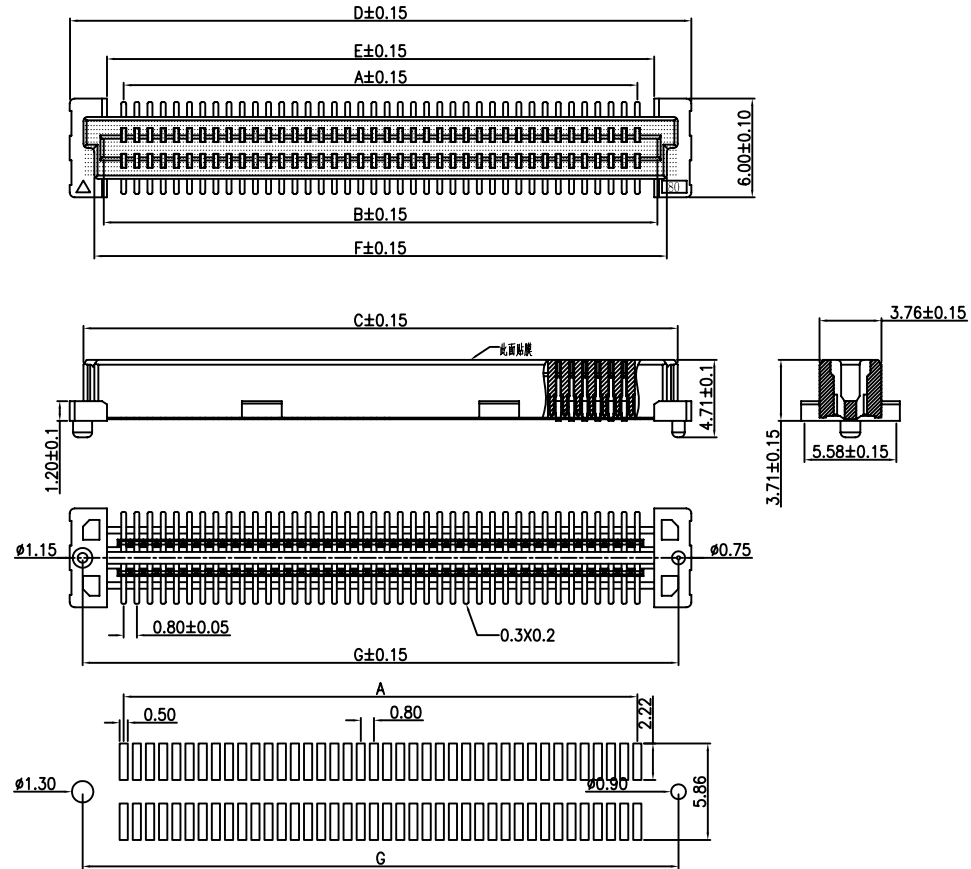

Ordering Information

3710 F XXX 038 G3 F T 01

No.of Pins	Plastics Height	Contact Plating	Insulator Material	Post
40P	H=3.8	G0:Gold Flash	Option	A=Tray
60P		G2:1.5U" Gold	D=BK-PA46	T=Tube
80P		G3:2U" Gold	F=BK-LCP	R=Tape&Reel
100P		G4:3U" Gold	E=PA9T	P=Membrane&Reel
120P		G5:30U" Gold		
		S0:Gold Flash/Tin		

PCB

P数	A	B	C	D	E	F	G
40	15.20	17.64	20.10	21.76	17.24	18.78	20.20
60	23.20	25.64	28.10	29.76	25.24	26.78	28.20
80	31.20	33.64	36.10	37.76	33.24	34.78	36.20
100	39.20	41.64	44.10	45.76	41.24	42.78	44.20
120	47.20	49.64	52.01	53.76	49.24	50.78	52.20
140	55.20	57.64	60.01	61.76	57.24	58.78	60.20

OPERATION

X.X  $\pm 0.30$

X.XX  $\pm 0.20$

X.XXX  $\pm 0.10$

Angle  $\pm 3^\circ$

DIM TOL

DRAW

CHECK

APPROVE

WZG

14.03.29

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

PROJ.

JiLN® 深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONIC CO.,LTD  
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 3710FXX038G3FT01  
TITLE: 0.8BTB-NPIN H=3.8母座

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.03.29	NEW DRAWING	