

## SPECIFICATIONS

## PERFORMANCE

Electical Rating:AC/DC 50V 0.5A

Insulation Resistance: 500MΩ

Contact Resistance:50mΩ Max

Withstang Volt:150V AC/minute







Opratng Temperature:-40°to+105°

Material

Contact:Phosphor Bronze GOLD-Plated

Housing:LCP

Max.Processing Temp:230°C for30-60 seconds  
(260°C for 10 seconds)

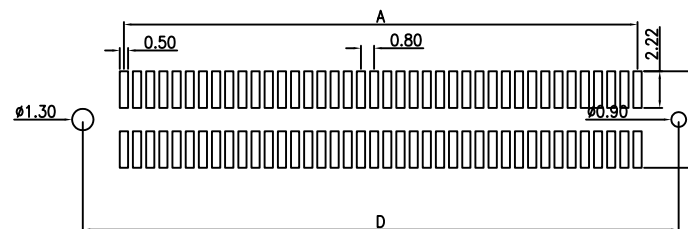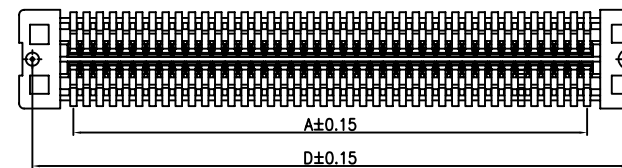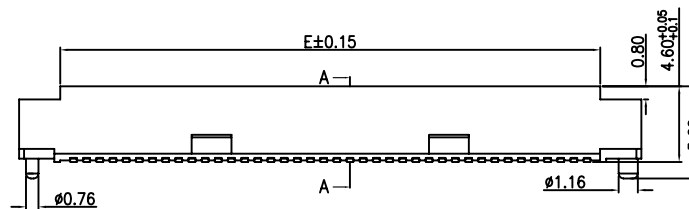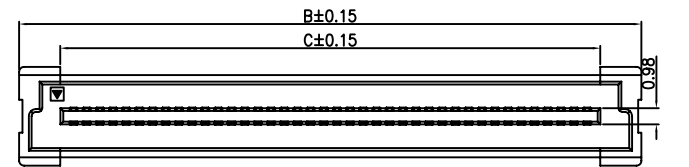

合高装配图

## Ordering Information

3710 M XXX 046 G3 F T 01

No.of Pins	Plastics Height	Contact Plating	Insulator Material	Post
40P	H=4.6	G0:Gold Flash	G2:1.5U" Gold	A=Tray
60P		G3:2U" Gold	D=BK-PA46	T=Tube
80P		G4:3U" Gold	F=BK-LCP	R=Tape&Reel
100P		G5:30U" Gold	E=PA9T	P=Membrane&Reel
120P		S0:Gold Flash/Tin		

P数	A	B	C	D	E	F
40	15.20	21.82	16.80	20.20	16.80	20.30
60	23.20	29.82	24.80	28.20	24.80	28.30
80	31.20	37.82	32.80	36.20	32.80	36.30
100	39.20	45.82	40.80	44.20	40.80	44.30
120	47.20	53.82	48.80	52.20	48.80	52.30
140	55.20	61.82	56.80	60.20	56.80	60.30

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

CHECK

APPROVE

WZG

14.03.29

SCALE

FIT

UNIT

SIZE

SHEET

PROJ.

**JiLN**® 深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONIC CO.,LTD  
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 3710MXX046G3FT01

TITLE: 0.8BTB-NPIN H=4.6公座

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	5	6	7	8	9
A0	2014.03.29	NEW DRAWING								