PARTS LIST

ITEM	QTY	REFERENCE DESIGNATOR	PART NUMBER	DESCRIPTION	MANUFACTURER
1	1		S1101EFF3403	BARE BOARD	ZIN TECHNOLOGIES
2	6	C1, C2, C3, C4, C5, C6	GA355DR7GF472KW01L	CAPACITOR, SMD, CERAMIC, 4700pF, C2220	MURATA
3	3	C7, C8, C9	C3216X7R1H224M	CAPACITOR SMD 0.22uF +/-20% 50V CERAMIC X7R 1206	TDK
4	6	C10, C11, C12, C13, C14, C15	C0805C103K5RACTU	CAPACITOR SMD 0.01uF 100V CERAMIC X7R 10% 0805	KEMET
5	1	C16	ST330-75T3KI	CAPACITOR, TANTALUM, 330uF, 75V, 10%, AXIAL	VISHAY/SPRAGUE
6	1	J19	PLC30M300A2	CONNECTOR 30 PIN RECTANGULAR POWER	POSITRONIC
7	3	TVS1, TVS2, TVS3	P6KE33CA	DIODE,TH,TVS,33V,600W	VISHAY
8	2	U1, U2	V24C5C50BL2	MODULE, DC-DC, 5V, VICOR, -55 TO +100	VICOR
9	1	U3	V24C12C100BL2	MODULE, DC-DC, 12V, VICOR, -55 TO +100	VICOR
10	1	U4	M-FIAM5BH22	EMI, FILTER, 28Vin, VICOR, -40 TO +100	VICOR
11	A/R		TZ-211	LABEL, 1/4 BLK LETTERS WHT BACKROUND	BROTHER
12	A/R		3140	RTV FOR CONFORMAL COATING	DOW CORNING
13	A/R		PR-1204	PRIMER FOR CONFORMAL COATING	DOW CORNING
14	A/R		SN63PB37/RMA	SOLDER	
15	A/R		3145 GREY	RTV ADHESIVE/SEALANT	DOW CORNING

7. CONFORMAL COATING, STAKING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1 AND THE FOLLOWING NOTES:
   - A. PERFORM CLEANLINESS TEST.
   - B. BAKE PWA AT 93°C ±5.5°C (200°F ±10°F) FOR 4 HOURS PRIOR TO CONFORMAL COATING.
   - △C STAKE C16 WITH ITEM 15 PRIOR TO CONFORMAL COATING.
   - △D MASK OFF ALL DESIGNATED AREAS USING KAPTON TAPE. ALL MASKING OPERATIONS SHALL BE PERFORMED UNDER AN AIR IONIZER.
   - △E MEASURE CONFORMAL COATING THICKNESS AT DESIGNATED AREAS.
   - F. CONFORMAL COAT THE COMPLETE ASSEMBLY USING ITEM 12 AND ITEM 13.
   - G. TEST PER TEST PROCEDURE ACME-TST-011 AFTER CONFORMAL COATING.
8. PLACE THE COMPLETED ASSEMBLY IN CLEAN, STATIC DISSIPATIVE PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER PER SAE AS478, METHOD 35. STORE IN A PROJECT APPROVED STORAGE AREA.
9. REFERENCE SCHEMATIC: S1101EFS3403
10. EXPEDITION CONTROL FILES:
    S1101EFA3403_REV_C.zip

NOTES: UNLESS OTHERWISE SPECIFIED

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. DEMOISTURIZE (BAKE OUT) PWB (ITEM 1) FOR A MINIMUM OF 2 HOURS AT 93°C ±5.5°C (200°F ±10°F.) PERFORM SOLDERING IMMEDIATELY AFTER BAKING, OR STORE IN A CLEAN, DRY, SEALED STATIC DISSIPATIVE BAG OR CONTAINER.
5. △5 MARK THE ASSEMBLY WITH REV AND S/N USING ITEM 11.
6. ASSEMBLY, SOLDERING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.2, NASA-STD-8739.3, AND THE FOLLOWING NOTES:
   - A. REFERENCE NEXT ASSEMBLY, S1101MFA3400, FOR ALIGNMENT OF ITEMS 8, 9 AND 10 BEFORE SOLDERING.
   - B. INSTALL AND SOLDER ALL SURFACE MOUNT (SMT) PART BEFORE THROUGH HOLE PARTS USING SOLDER (ITEM 14.)
   - C. FOR THROUGH HOLE PARTS, LEAD TERMINATIONS SHALL BE STRAIGHT THROUGH (NOT LAPPED OR CLINCHED.)
   - D. FUNCTIONALLY TEST COMPLETED ASSEMBLY BEFORE CONFORMAL COATING PER TEST PROCEDURE ACME-TST-011.

ACME-ECO-321 In Process

CHG	ZONE	DESCRIPTION	APP/DATE
C		REVISED PER ACME-ECO-185	T GOBELI 5/6/14 D STRANG 5/7/14 R PFEIFFER 5/5/14
B		REVISED PER ACME-ECO-114 & ACME-ECO-141	T GOBELI 4/25/13 M HOMKO 4/26/13 R PFEIFFER 4/25/13
A		REVISED PER ACME-ECO-056	T GOBELI 8/7/2012 M HOMKO 8/8/2012 D STRANG 8/7/2012

REVISIONS

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E. McCLOSKEY DATE: 5/7/14

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES				
TOLERANCE ON				
.X	± .05	PROJECT LEAD	B. BOROWSKI	6/1/2012
.XX	± .01	QUALITY	D. SEELEY	6/1/2012
.XXX	± .005	SAFETY	W. BORRELLI	6/1/2012
FRACTION	± X/XX	ENGINEER	T. GOBELI	5/31/2012
ANGULAR	± X° XX'	DESIGNER	D. STRANG	5/31/2012
BREAK EDGES	.XX-.XX	REVIEWER	R. PFEIFFER	5/31/2012

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

CONTRACT NUMBER: NNC09BA02B
DELIVERY NUMBER: SPACE110
FILE LOCATION: S1101EFA3403_REV_C.bpd
CAD PACKAGE: BLUEPRINT


NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

NEXT ASSEMBLY
ACME
POWER DISTRIBUTION ASSEMBLY
S1101MFA3400


TITLE
ACME
POWER DISTRIBUTION BOARD
ASSEMBLY DRAWING

SIZE	DRAWING NUMBER	REV	BLDG	AREA
C	S1101EFA3403	C	ZIN	GRC
			UNITS:	INCH
SCALE: NONE	INITIAL REL DATE 6/1/2012	SHEET 1 OF 2	DISCIPLINE ELECTRICAL	

REV C
DRAWING NUMBER S1101EFA3403
SIZE C

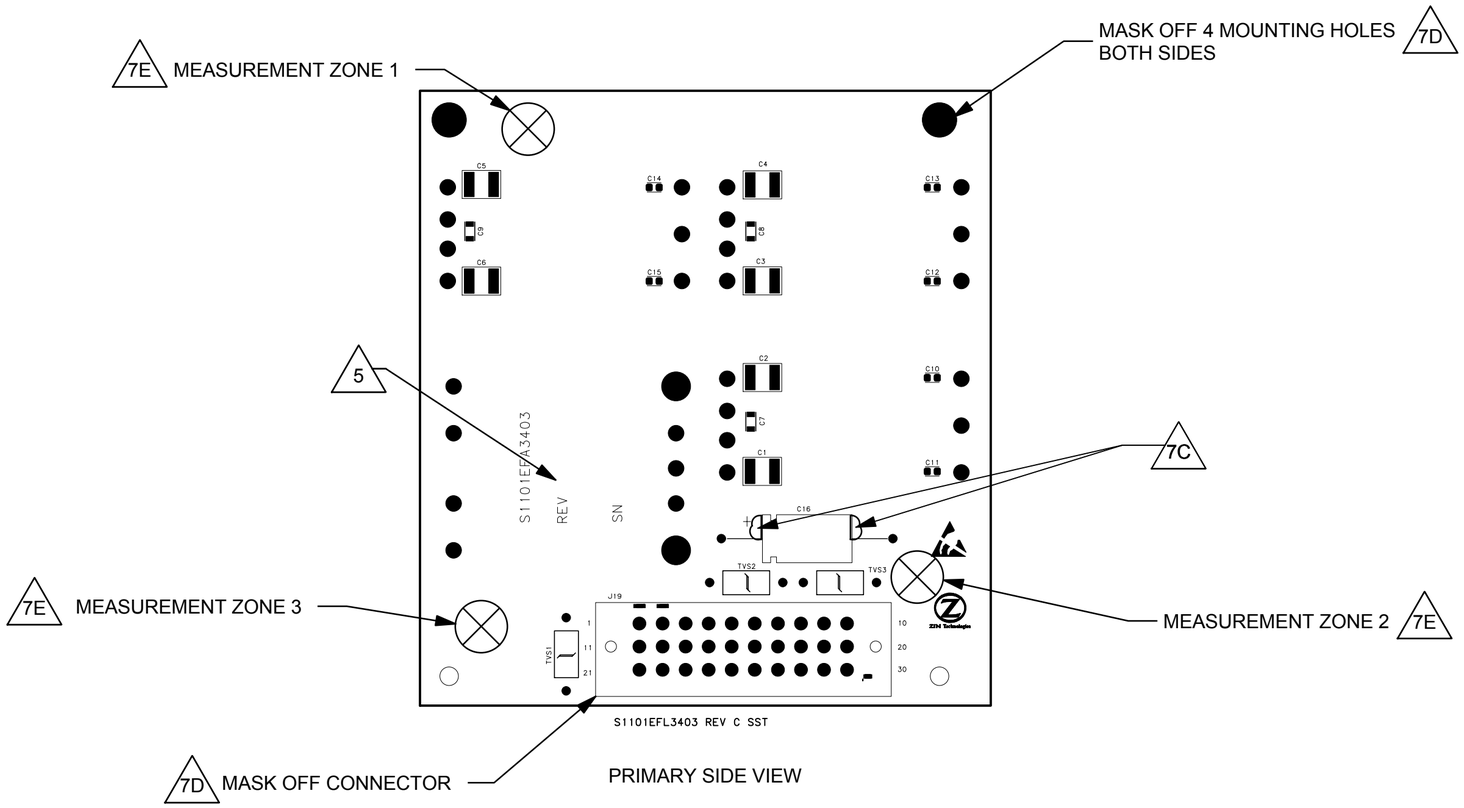

PRIMARY SIDE VIEW

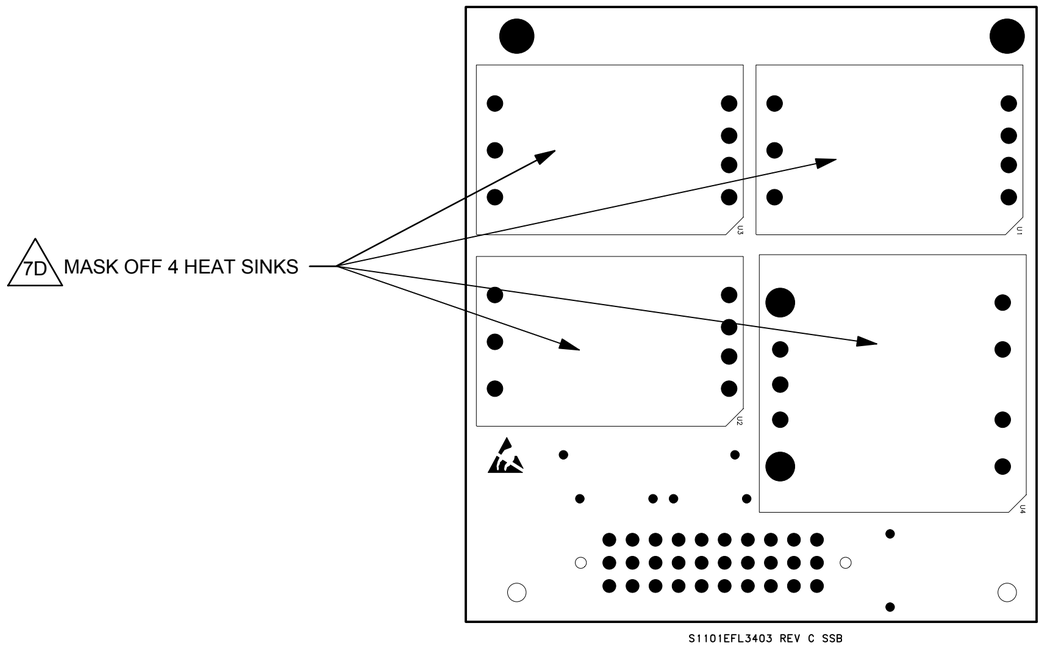

SECONDARY SIDE VIEW

ACME-ECO-321 In Process

CHG	ZONE	DESCRIPTION	APP/DATE
REVISIONS			

SIZE	DRAWING NUMBER	REV	BLDG	AREA
C	S1101EFA3403	C	ZIN	GRC
			UNITS: INCH	
SCALE: NONE	INITIAL REL DATE 6/1/2012	SHEET 2 OF 2	DISCIPLINE ELECTRICAL	

SIZE C | DRAWING NUMBER S1101EFA3403 | REV C