

COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION	MANUFACTURER
C1	1	805-002-16UC10-13SA	CONNECTOR, PLUG, 13 POS	GLENAIR
C2	1	380MS137UC0806-6	BACKSHELL, STRAIGHT	GLENAIR
C3	A/R	809-002	CONTACT, SOCKET, SIZE 23, AWG 22-28	GLENAIR
C4	1	801-039-26M10-26PA-422B	CONNECTOR, PLUG, 26 POS	GLENAIR
C5	1	380MS137UC1006-6	BACKSHELL, STRAIGHT	GLENAIR
C6	A/R	809-001	CONTACT, PIN, SIZE 23, AWG 22-28	GLENAIR
C7	A/R	E50824	WIRE, 24 AWG, ETHERNET, 4 PAIR	PIC WIRE & CABLE
C8	A/R	M27500-24RC3S06	3/C, 24 AWG TWISTED, SHIELDED JACKETED	QPL
C9	A/R	5011001332S	EXPANDABLE BRAIDED SLEEVING, 1/2"	BENTLEY HARRIS
C10	A/R	THFE4-500015	SHRINK TUBING, EXPANDED PREHEAT ID .500"	SAINT GOBAIN
C11	A/R	P-224X.5	TAPE, KAPTON, 1/2" WIDE	PERMACEL
C12	A/R	222MS	THREADLOCKER	LOCTITE
C13	A/R	7649	PRIMER N	LOCTITE
C14	A/R	2216 B/A GRAY	EPOXY, 2 PART	3M
C15	1	667-261-UC-H1054-5	CONN. CAP, 805 SERIES, SIZE 10 PLUG, 5" TETHER	GLENAIR
C16	1	667-217-UC-H1054-5	CONN. CAP, 801 SERIES, SIZE 10 PLUG, 5" TETHER	GLENAIR
C17	1	S1101EFT2007-XX	COMBO LABEL	
C18	1	S1101EFT2007-03	CONNECTOR ID LABEL	
C19	1	S1101EFT2007-04	CONNECTOR ID LABEL	

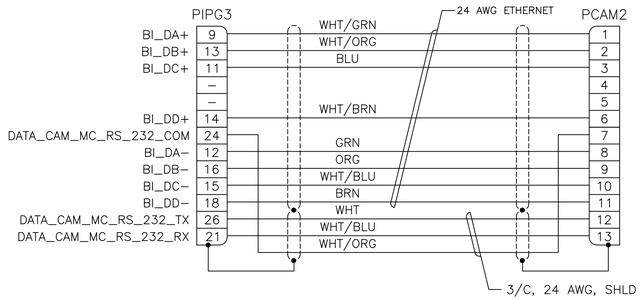

SCHEMATIC

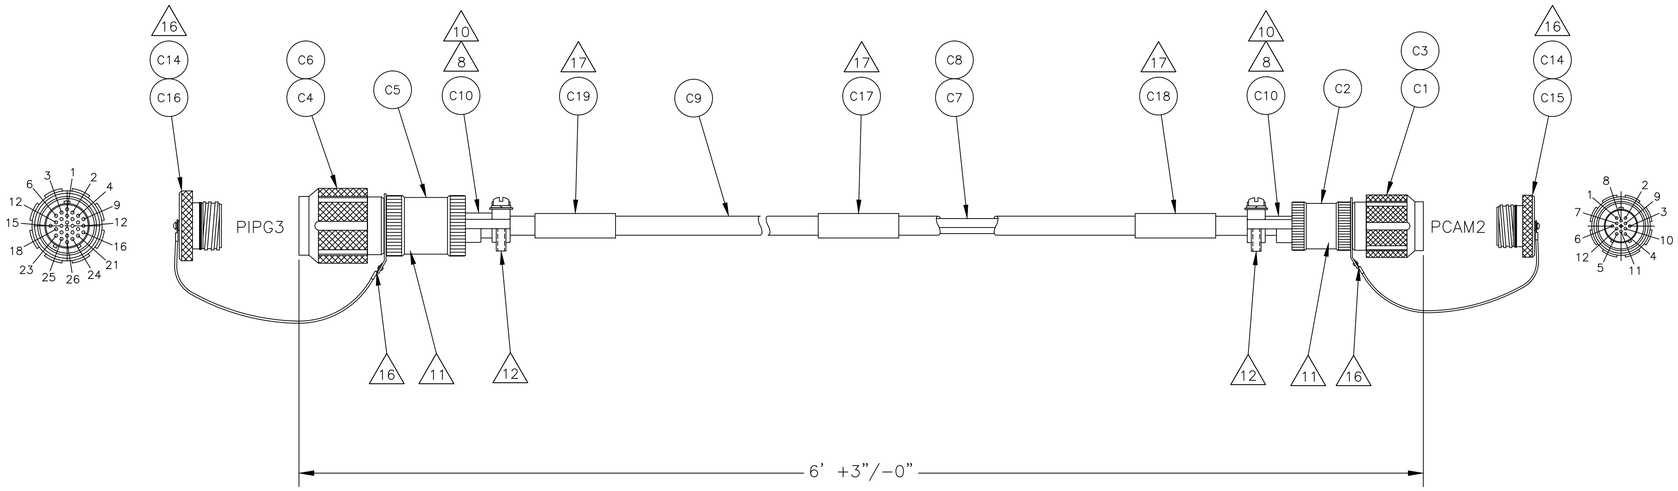

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.4 AND FOLLOWING NOTES:
   a. TO PREVENT POTENTIAL DAMAGE (COLD FLOW) OF THE UNDERLYING WIRE INSULATION, SEPARATOR SHALL BE APPLIED OVER THE WIRE BUNDLE TO GIVE THE WIRE CONTINUOUS PROTECTION.
   b. ALL SHIELD TERMINATIONS ARE INTERFERENCE SENSITIVE.
5. FOR TENSILE PULLS SEE TENSILE PULL STRENGTH LIST. TENSILE PULL STRENGTHS PER NASA-STD-8739.4 AND/OR THE MANUFACTURER'S SPECIFICATIONS.
6. INSTALL CONTACTS IN ALL UNUSED POSITIONS OF CONNECTORS.
7. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4 AND/OR MANUFACTURER'S SPECIFICATIONS. CONTACTS REQUIRING A PULL TEST FOR RETENTION SHALL BE PERFORMED AS FOLLOWS: A GENTLE PULL ON THE WIRE SHALL BE USED TO DETERMINE IF THE CONTACT IS SEATED PROPERLY.

△8 USE KAPTON TAPE (ITEM C11) TO SECURE EXPANDO SLEEVE (ITEM C9) WITHIN BACKSHELL.

9. TERMINATE SHIELDS INTO BACKSHELL PER MANUFACTURER'S SPECIFICATION.

△10 TO SAFELY SECURE CABLE IN STRAIN RELIEF INCREASE THE CABLE DIAMETER USING HEAT SHRINK TUBING (ITEM C10). MAXIMUM OF TWO (2) LAYERS.

△11 TORQUE BACKSHELLS (ITEM C2) TO 14-18 IN-LBS AND (ITEM C5) TO 22-26 IN-LBS. STAKE BACKSHELL USING EPOXY (ITEM C14).

△12 TRIM FASTENERS ON STRAIN RELIEF TO EXPOSE 1-2 THREADS. APPLY PRIMER N (ITEM C13) AND THREADLOCKER 222MS (ITEM C12), TORQUE FASTENERS PER CHART. APPLY EPOXY (ITEM C14) TO EXPOSED THREADS.

13. -REMOVED-

14. TEST PER NASA-STD-8739.4 PARA 18.2.6a USING THE FOLLOWING:
    CONTINUITY: < 5 OHMS
    DWV: VOLTAGE: 750VAC ±50VAC
    CURRENT: < 1 MILLIAMP
    DURATION: < 1 MINUTE
    IR: VOLTAGE: 500 ±50VDC
    RESISTANCE: > 100 MEG OHMS
    DURATION: < 1 MINUTE
15. PLACE COMPLETED ASSEMBLY IN CLEAN, STATIC-SHIELDING PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/STATEMENT OF WORK PER SAE AS478, METHOD 35D. STORE IN A PROJECT APPROVED STORAGE AREA.

△16 APPLY EPOXY, ITEM C14, TO SHARP EDGES OF CONNECTOR CAP TETHERS, ITEMS C15 AND C16.

△17 APPLY LABELS TO CLEAN, DRY SURFACE IN LOCATIONS SHOWN.

CRIMP TOOL LIST				
CONTACT P/N	CRIMP TOOL	POSITIONER	I/E TOOL	REF. DES.
809-001	M22520/2-01	K1461	809-088	PIPG3
809-002	M22520/2-01	K1461	809-088	PCAM2

TENSILE PULL STRENGTH LIST			
MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
GLENAIR	809-001	24	8
GLENAIR	809-002	24	8

BACKSHELL CLAMPING TORQUE TABLE		
SCREW SIZE	TORQUE RANGE	UNITS
2-56	2 ±0.5	IN-LB
4-40	4 ±0.5	IN-LB
6-32	6 ±1.0	IN-LB
8-32	8 ±1.0	IN-LB
10-32	10 ±1.0	IN-LB
.250-20	12 ±1.0	IN-LB

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: E. McCLOSKEY 9/1/15
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	M. HOMKO 11/21/14	QUALITY	D. SEELEY 11/25/14
REVIEWER	J. BRUEWER 11/25/14	MATERIALS	M. WILKINSON 11/24/14
MECHANICAL	A. DRAKE 11/21/14	PROJ LEAD	B. BOROWSKI 11/25/14
ELECTRICAL	T. GOBELI 11/21/14	ENGINEER	M. SAVINA 11/21/14
STRUCTURAL	C. WERNER 11/21/14		
SAFETY	W. BORRELLI 11/21/14		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: 52-BT3

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
IPSU-G TO ACME CAMERA INTERFACE HARNESS ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EFA2007	B

SCALE NONE | INITIAL REL DATE 11/26/14 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL NAME: S1101EFA2007_REV_B.DWG

AutoCAD 2012

ACME-ECO-538 In Process

REV	DESCRIPTION	APPROVED
B	REVISED PER ACME-ECO-489 AND ACME-ECO-508.	MH 8/28/15 WB 8/28/15 DS 9/1/15 JO 9/1/15
A	REVISED PER ACME-ECO-461.	MH 4/23/15 DS 4/23/15 TG 4/28/15

REVISION HISTORY

DWG NO S1101EFA2007 SH 1 REV B